



VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

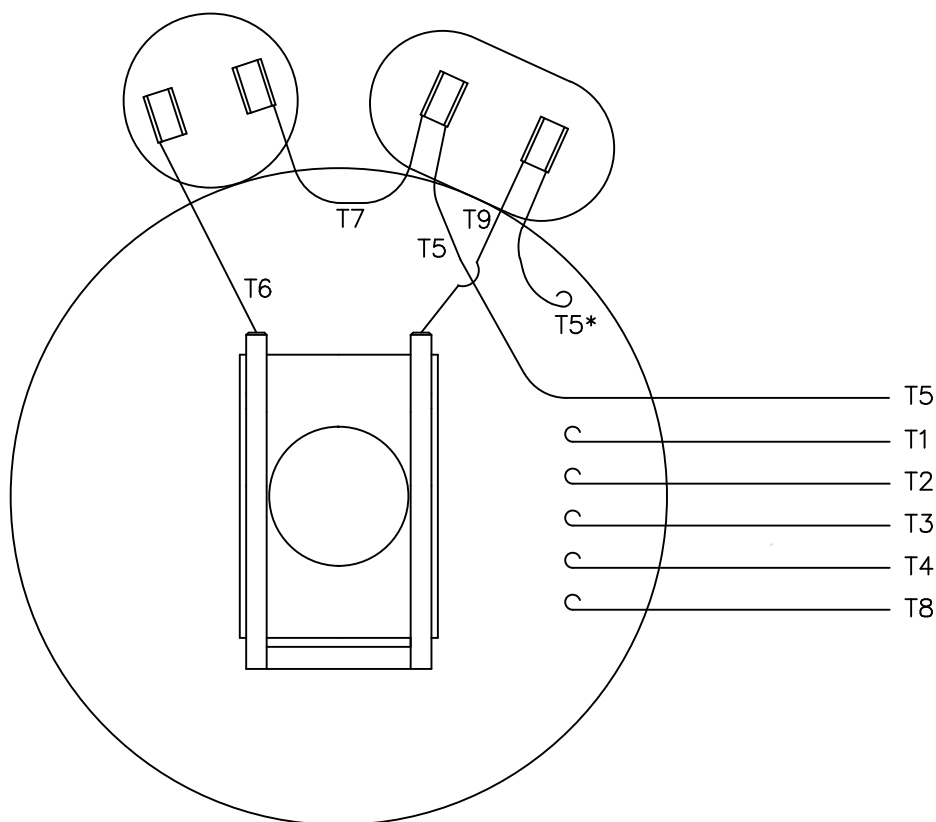

* THIS LEAD MAY BE WHITE

LINE LEADS

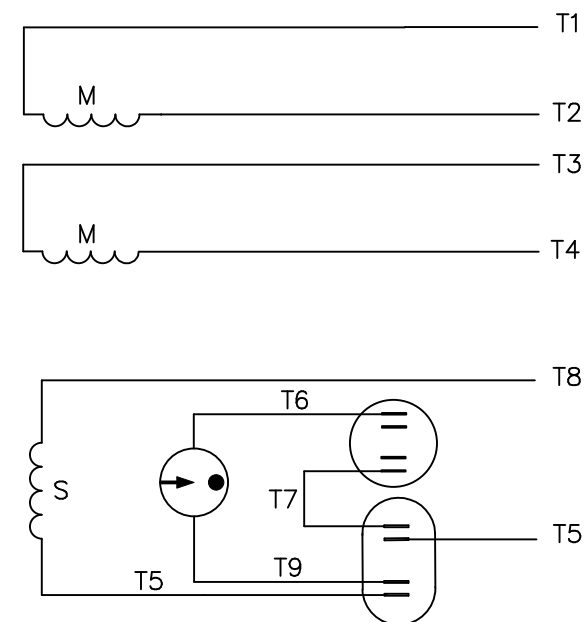

	ROTATION FACING LEAD END	L1	L2	JOIN
HIGH VOLT	C.C.W.	T1	T4 T5	T2,T3 T8
	C.W.	T1	T4 T8	T2,T3 T5
LOW VOLT	C.C.W.	T1 T3,T8	T2,T4 T5	
	C.W.	T1,T3 T5	T2,T4 T8	

TOLERANCES
UNLESS SPECIFIED

DEC. INCHES

.X ±.1

.XX ±.01

.XXX ±.005

.XXXX ±.0005

ANG ±1/2"

ELECTRIC MOTORS
GEARMOTORS
AND DRIVES

DRAWN JRW 09/27/74

CHK TEM

APPD 10/11/74

SCALE 1=1

REF A-005053

FMF W-K6343

PREV

11 ALTERNATE T5 LEAD MARKING WAS RED

RLW 8/6/02

.XX ±.01

10 ADDED ALTERNATE T5 LEAD MARKING

RLW 6/5/02

KH .XXX ±.005

09 REDRAWN TO CAD

DBT 05/28/97

.XXXX ±.0005

NO. REVISION

BY & DATE

CHK

ANG ±1/2"

TITLE

EXT. WIRING DIAGRAM
TYPE "K" W/O PROTECTOR

MAT'L.

DECAL-004012

FINISH

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP

CAD FILE

00505401

SIZE

A

DRAWING NO.

005054-01

REV.

11