

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :								
Product line	: ODP NEMA Premium Efficiency Three-Phase	Product code :	10792682					
		Catalog # :	07518OT3G365T					
Frame	: 364/5T	Cooling method	: IC01 - ODP					
Insulation class	: F	Mounting	: F-1					
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)					
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line					
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>2</sup>	: 850 lb					
Protection degree	: IP23	Moment of inertia (J)	: 19.5 sq.ft.lb					
Design	: B							
Output [HP]	75	50	50	50	75	75	75	
Poles	4	4	4	4	4	4	4	
Frequency [Hz]	60	50	50	50	50	50	50	
Rated voltage [V]	460	380	400	415	380	400	415	
Rated current [A]	83.5	65.7	64.5	64.4	97.6	93.7	91.4	
L. R. Amperes [A]	559	519	542	573	517	543	576	
LRC [A]	6.7x(Code G)	7.9x(Code H)	8.4x(Code J)	8.9x(Code K)	5.3x(Code E)	5.8x(Code F)	6.3x(Code F)	
No load current [A]	27.0	23.8	25.9	28.0	23.8	25.9	28.0	
Rated speed [RPM]	1780	1485	1485	1485	1475	1475	1480	
Slip [%]	1.11	1.00	1.00	1.00	1.67	1.67	1.33	
Rated torque [ft.lb]	218	174	174	174	263	263	263	
Locked rotor torque [%]	210	240	260	290	160	175	190	
Breakdown torque [%]	260	320	340	380	210	225	250	
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15	
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K	
Locked rotor time	25s (cold) 14s (hot)	34s (cold) 19s (hot)	30s (cold) 17s (hot)	28s (cold) 16s (hot)	34s (cold) 19s (hot)	30s (cold) 17s (hot)	28s (cold) 16s (hot)	
Noise level <sup>2</sup>	68.0 dB(A)							
Efficiency (%)	25%	94.4	91.2	90.8	90.5	93.8	93.8	93.8
	50%	94.5	91.9	91.6	91.4	93.9	93.9	93.9
	75%	95.0	93.7	93.6	93.6	94.1	94.1	94.1
	100%	95.0	94.2	94.3	94.3	94.1	94.1	94.1
Power Factor	25%	0.51	0.49	0.44	0.41	0.62	0.57	0.53
	50%	0.76	0.74	0.69	0.65	0.86	0.81	0.78
	75%	0.84	0.85	0.81	0.78	0.90	0.88	0.86
	100%	0.87	0.90	0.87	0.84	0.91	0.90	0.89
Bearing type	: 6314 C3	6314 C3	Foundation loads					
Sealing	: Without	Without	Max. traction	: 1855 lb				
	Bearing Seal		Bearing Seal	Max. compression	: 2705 lb			
Lubrication interval	: 20000 h	20000 h						
Lubricant amount	: 27 g	27 g						
Lubricant type	: Mobil Polyrex EM							
Notes								
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.				
Rev.	Changes Summary			Performed	Checked	Date		
Performed by								
Checked by					Page	Revision		
Date	04/11/2019				1 / 36			

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

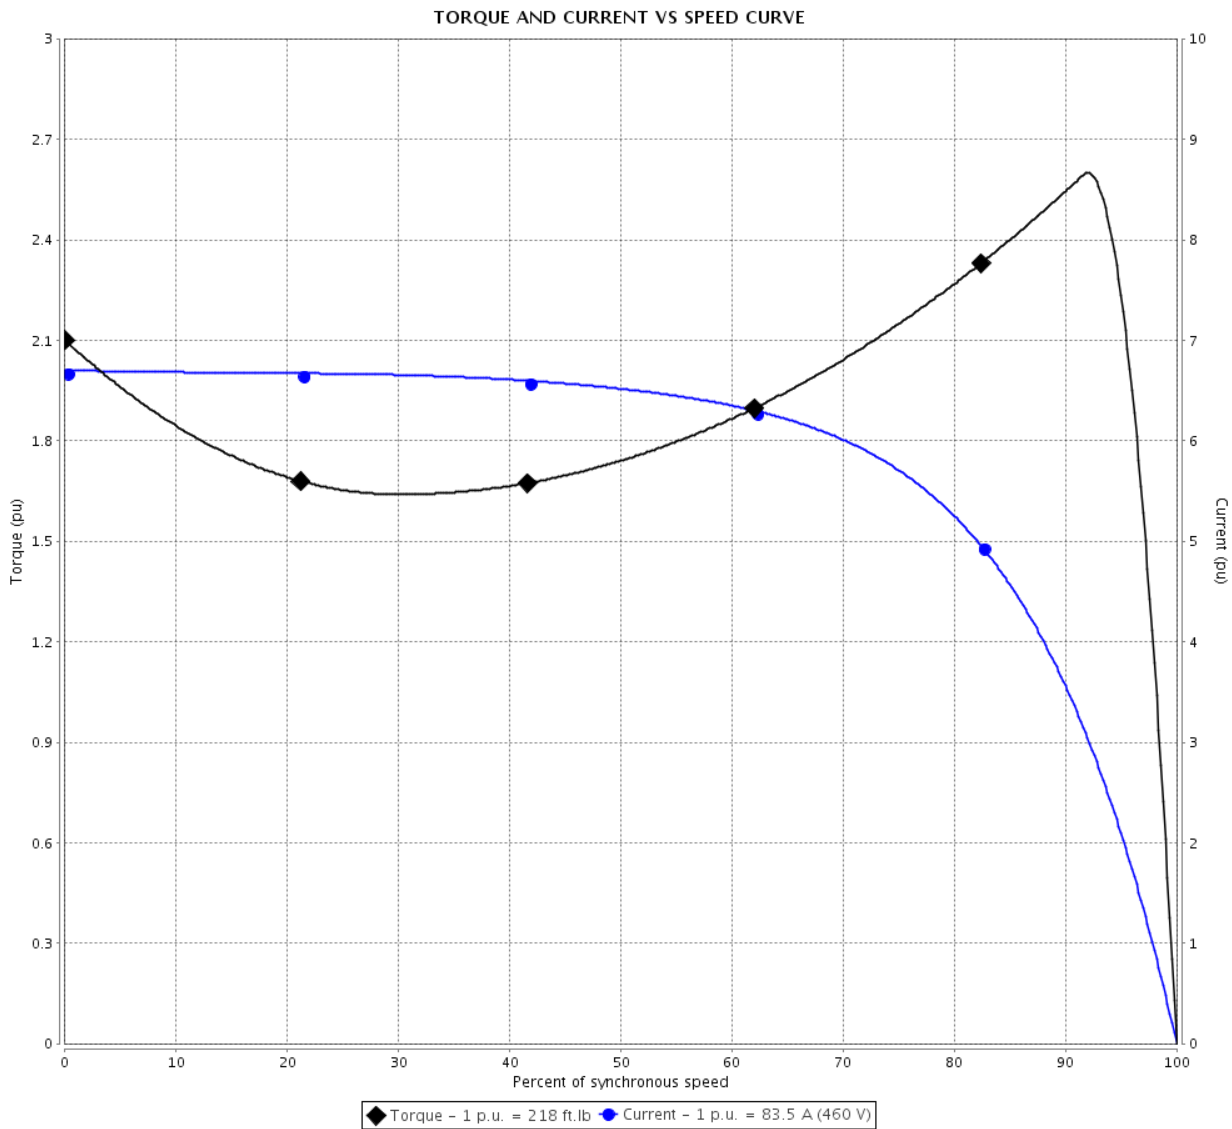

Performance : 460 V 60 Hz 4P

Rated current	: 83.5 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 218 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Locked rotor time : 25s (cold) 14s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

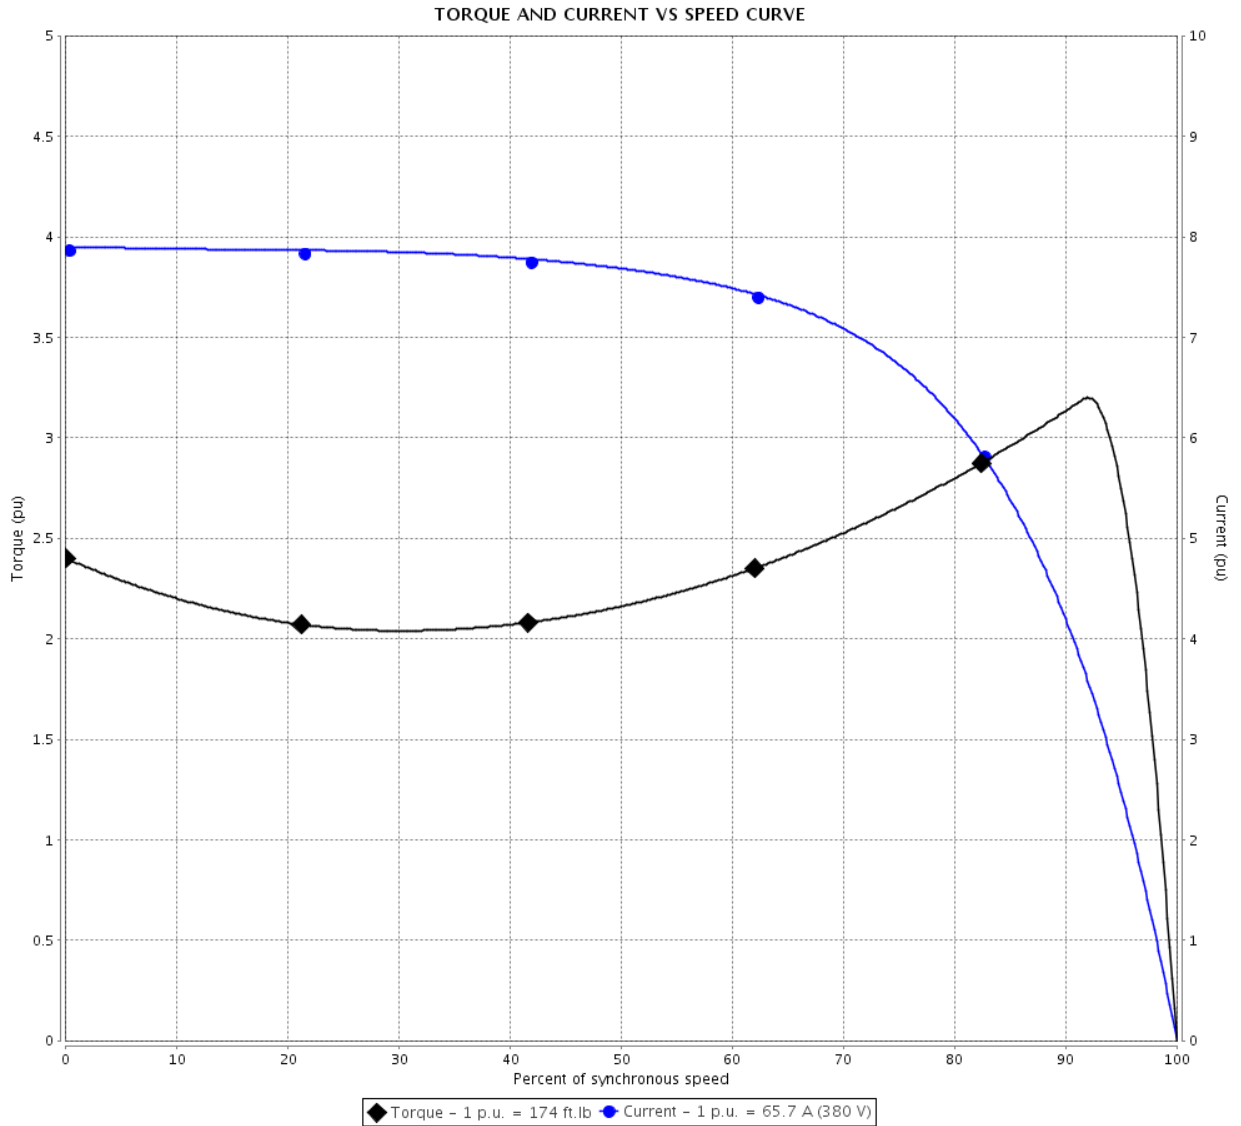

Performance : 380 V 50 Hz 4P IE3

Rated current	: 65.7 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 7.9	Duty cycle	: Cont.(S1)
Rated torque	: 174 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 320 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Locked rotor time : 34s (cold) 19s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

TORQUE AND CURRENT VS SPEED CURVE

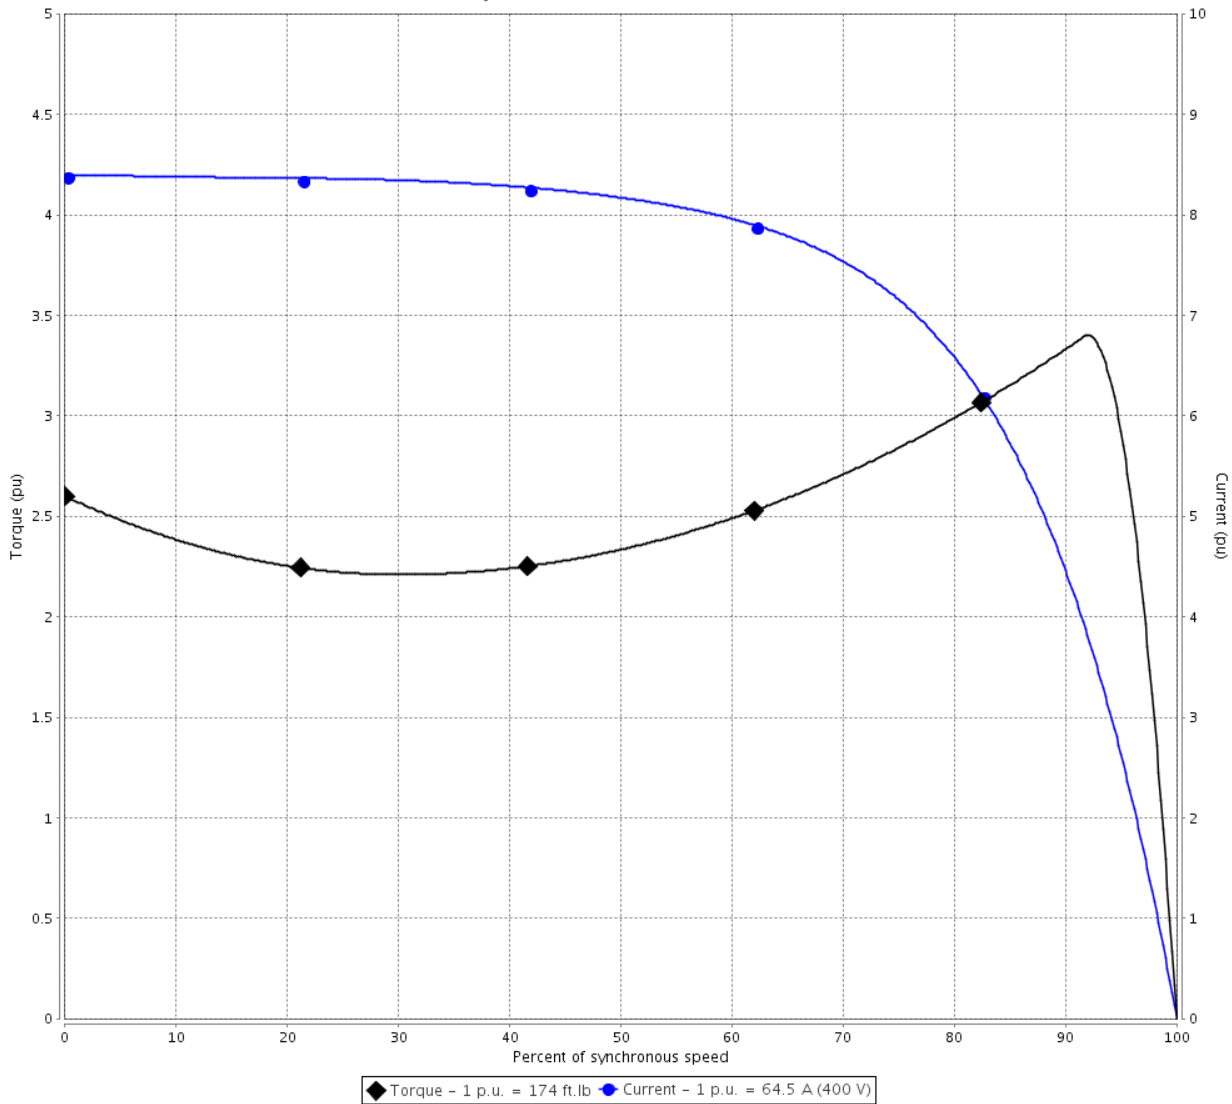

Performance : 400 V 50 Hz 4P IE3

Rated current	: 64.5 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 8.4	Duty cycle	: Cont.(S1)
Rated torque	: 174 ft.lb	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.15
Breakdown torque	: 340 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Locked rotor time : 30s (cold) 17s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

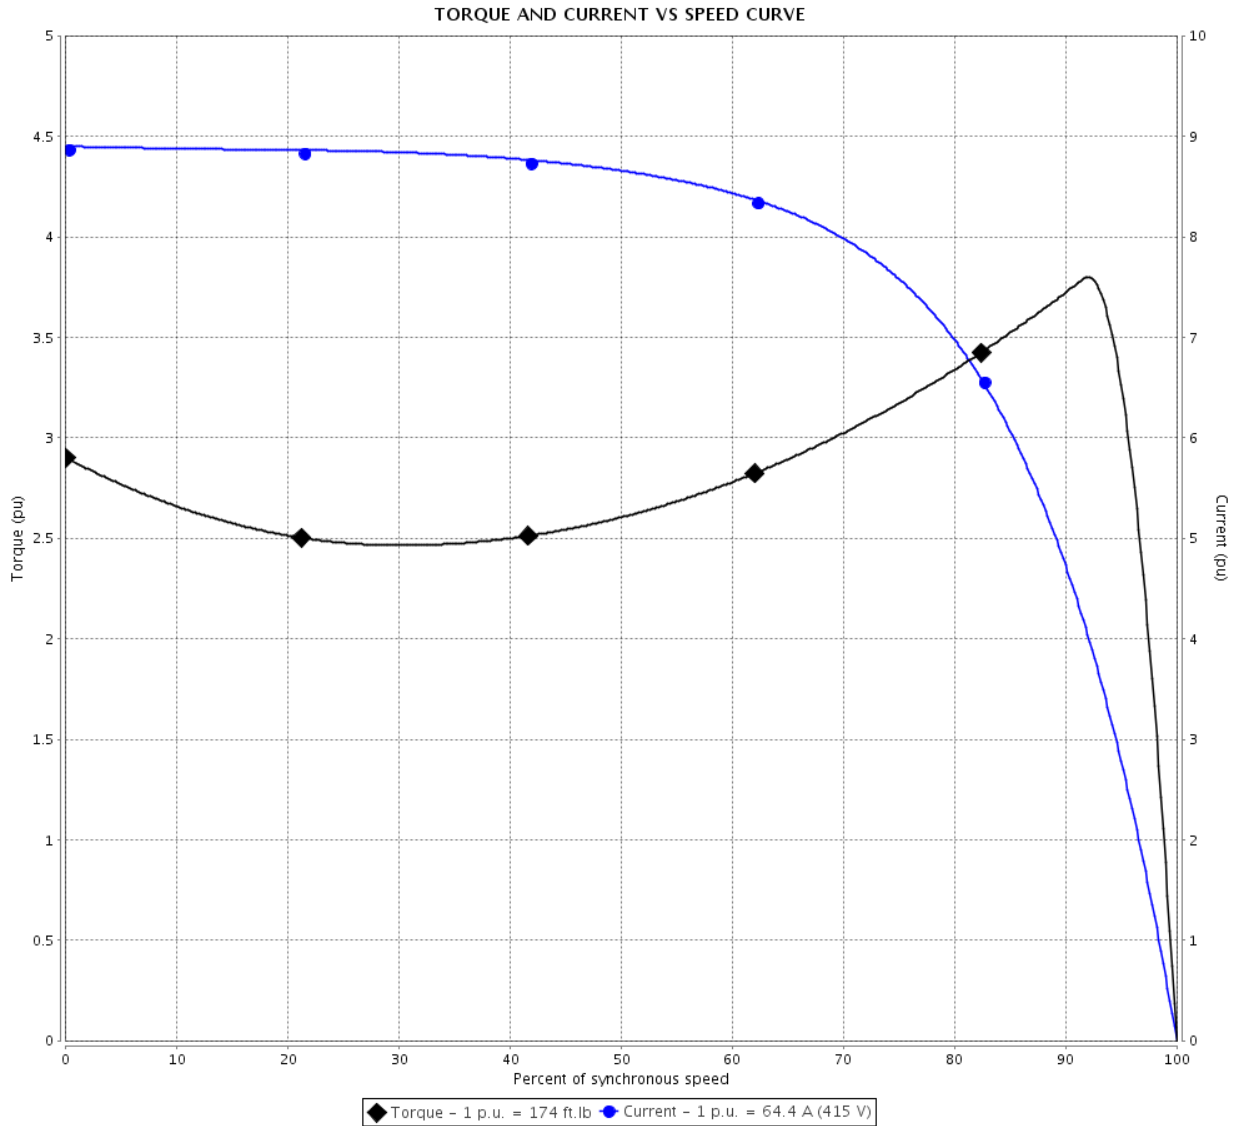

Performance : 415 V 50 Hz 4P IE3

Rated current	: 64.4 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 8.9	Duty cycle	: Cont.(S1)
Rated torque	: 174 ft.lb	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 380 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Locked rotor time : 28s (cold) 16s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

TORQUE AND CURRENT VS SPEED CURVE

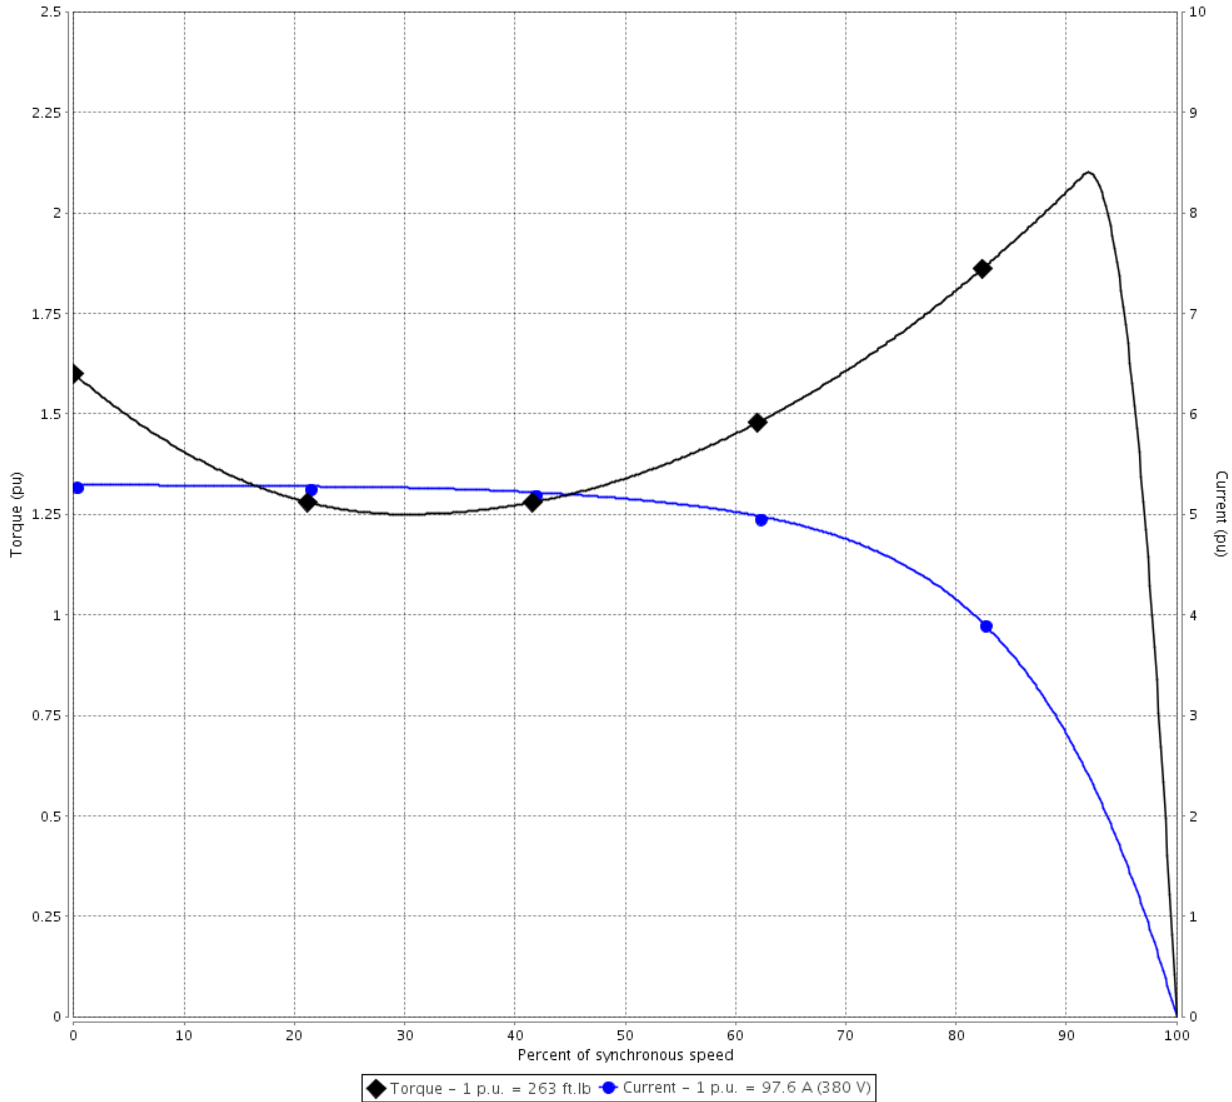

Performance : 380 V 50 Hz 4P IE2

Rated current	: 97.6 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 5.3	Duty cycle	: Cont.(S1)
Rated torque	: 263 ft.lb	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.15
Breakdown torque	: 210 %	Temperature rise	: 80 K
Rated speed	: 1475 rpm	Design	: B

Locked rotor time : 34s (cold) 19s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

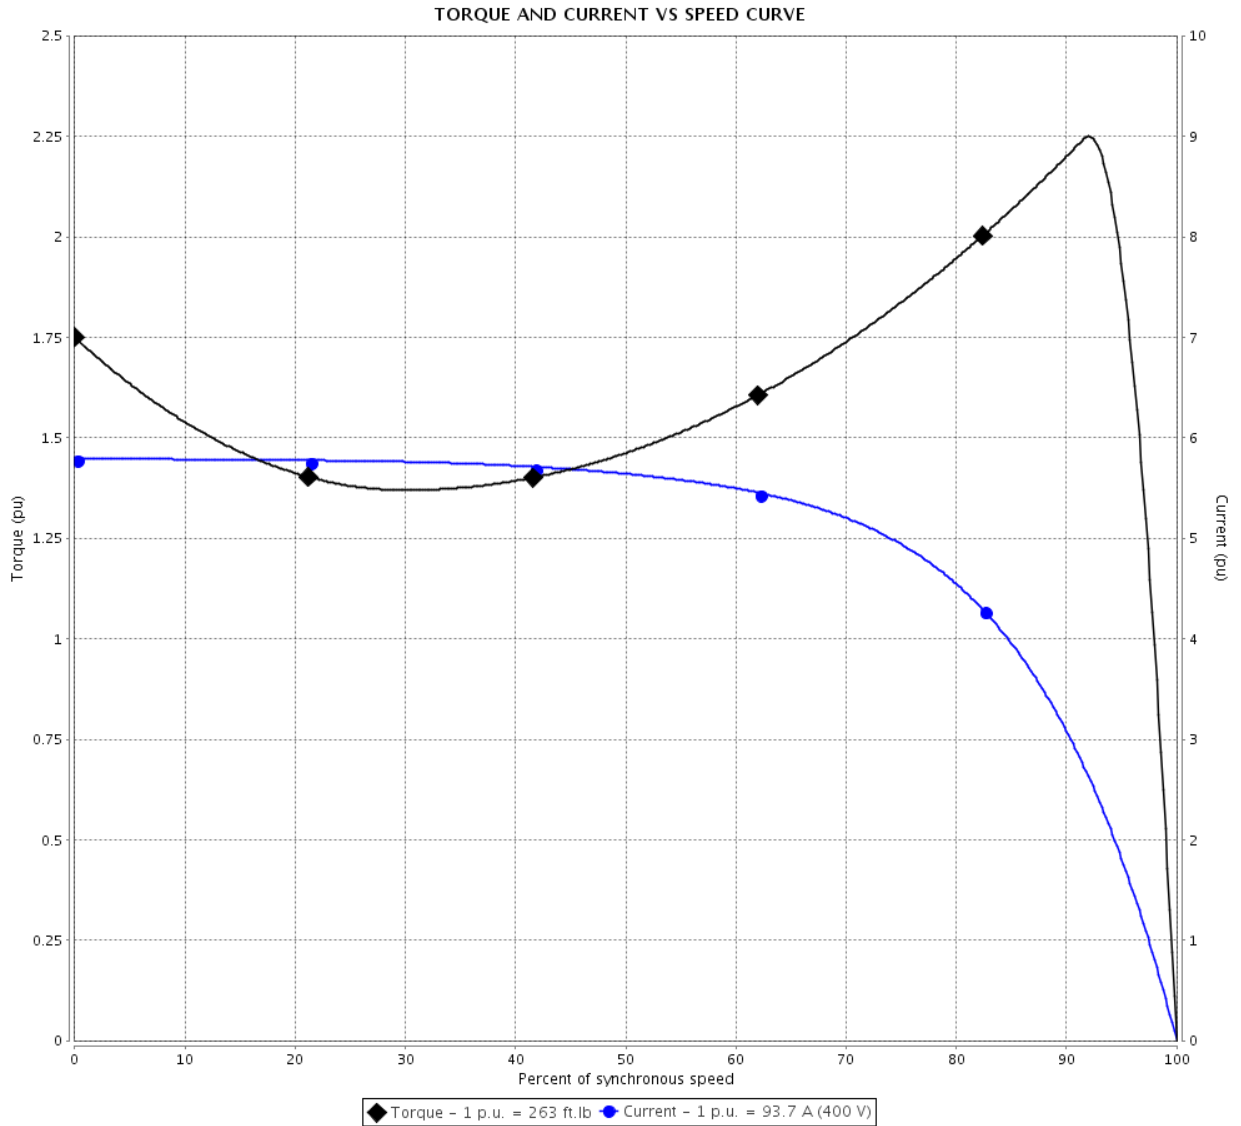

Performance : 400 V 50 Hz 4P IE2

Rated current	: 93.7 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 263 ft.lb	Insulation class	: F
Locked rotor torque	: 175 %	Service factor	: 1.15
Breakdown torque	: 225 %	Temperature rise	: 80 K
Rated speed	: 1475 rpm	Design	: B

Locked rotor time : 30s (cold) 17s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 7 / 36	Revision
Checked by				
Date	04/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

TORQUE AND CURRENT VS SPEED CURVE

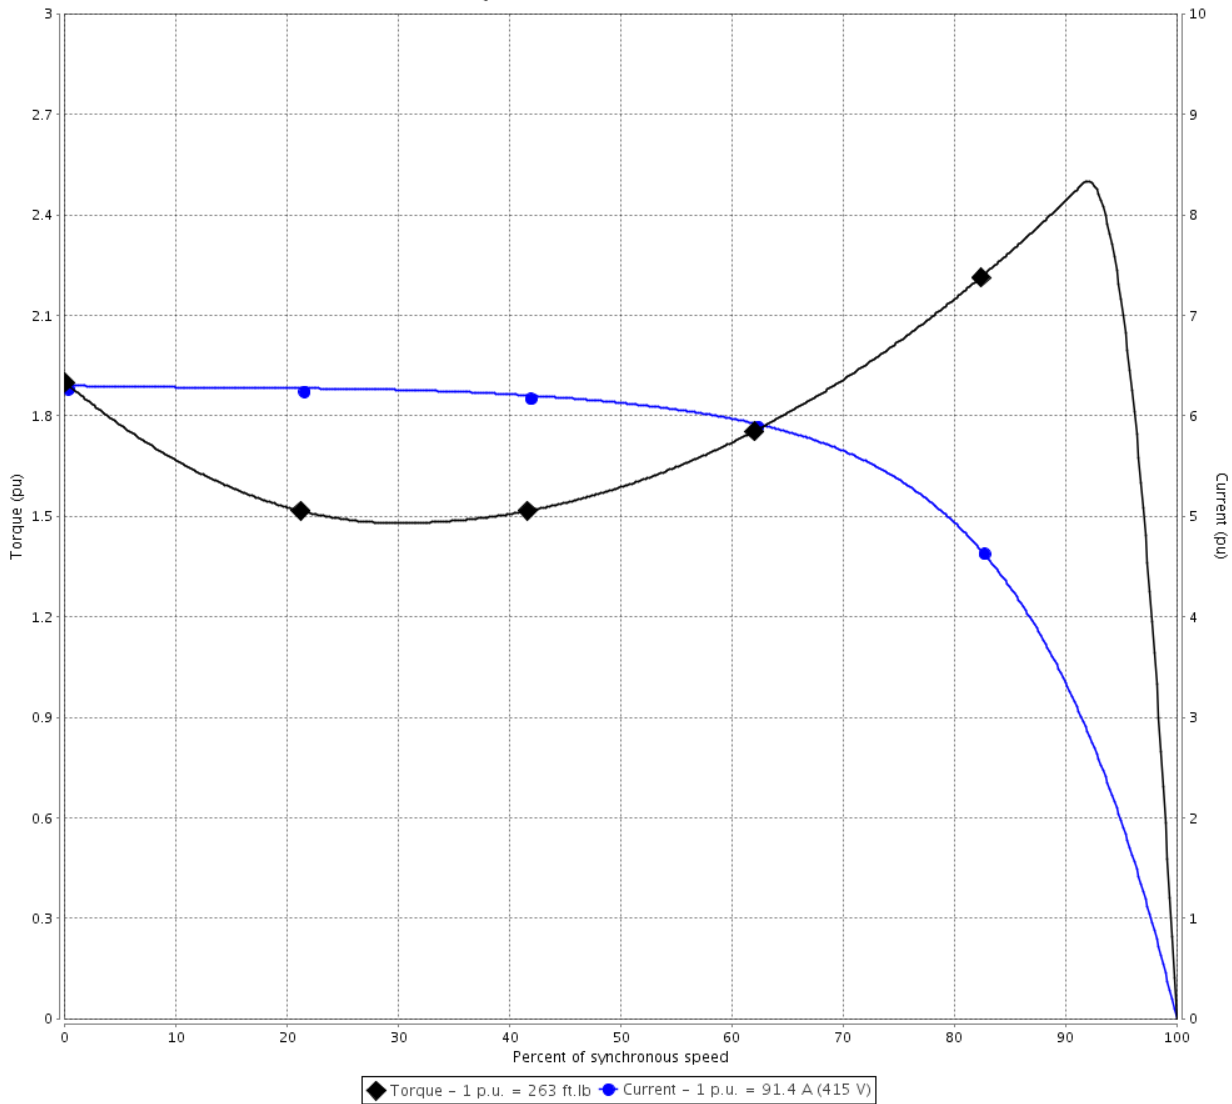

Performance : 415 V 50 Hz 4P IE2

Rated current	: 91.4 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 263 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Locked rotor time : 28s (cold) 16s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 36	Revision
Checked by				
Date	04/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

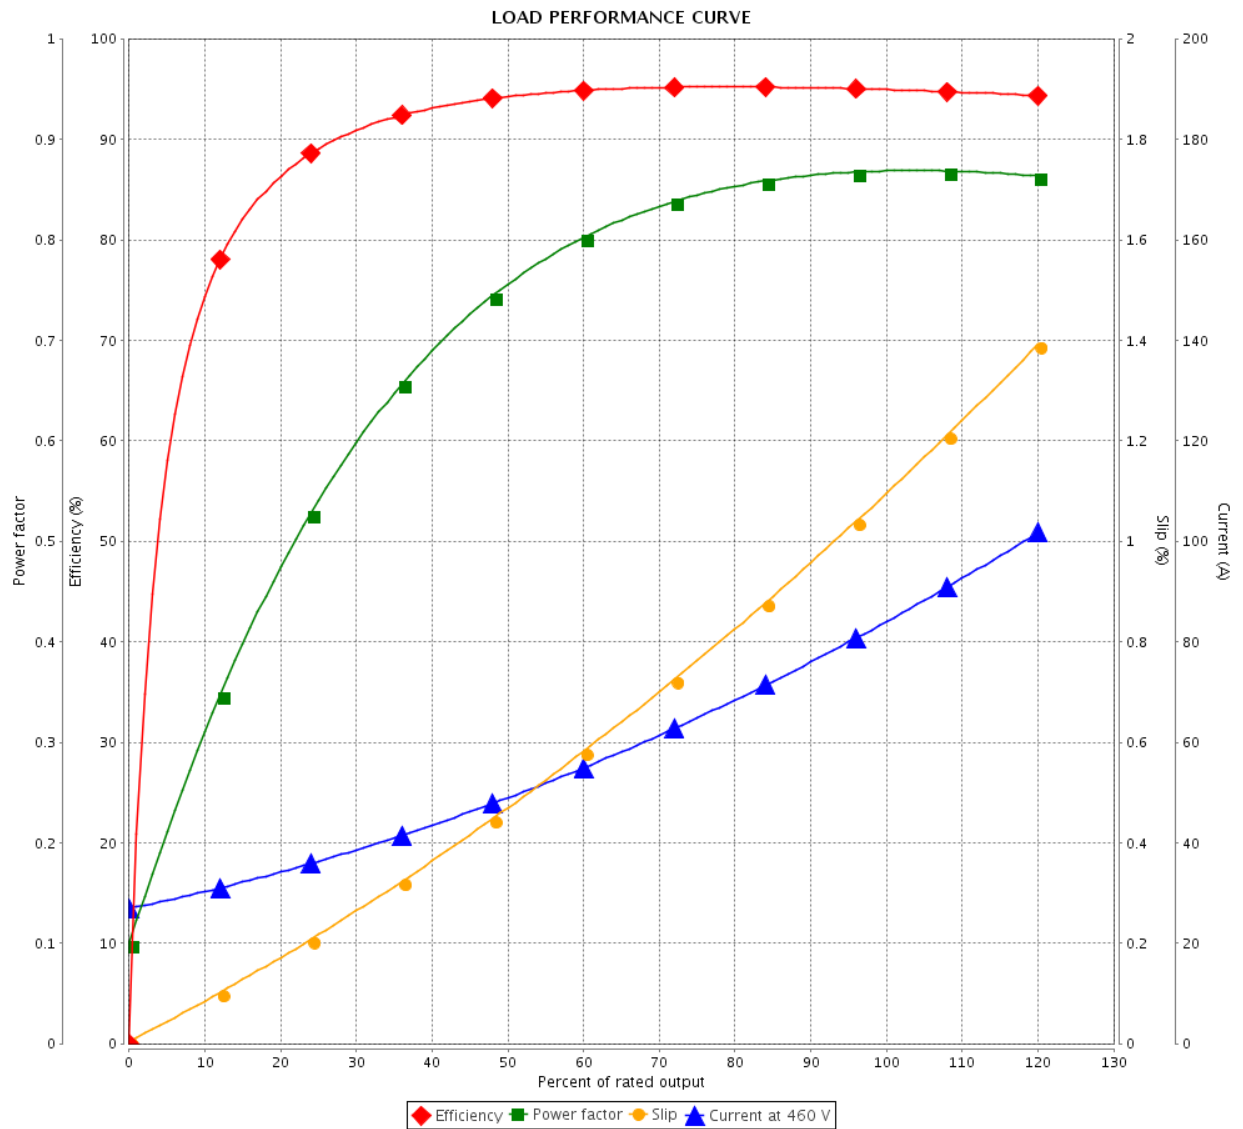

Performance : 460 V 60 Hz 4P

Rated current : 83.5 A  
LRC : 6.7  
Rated torque : 218 ft.lb  
Locked rotor torque : 210 %  
Breakdown torque : 260 %  
Rated speed : 1780 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 36		
Date		04/11/2019		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

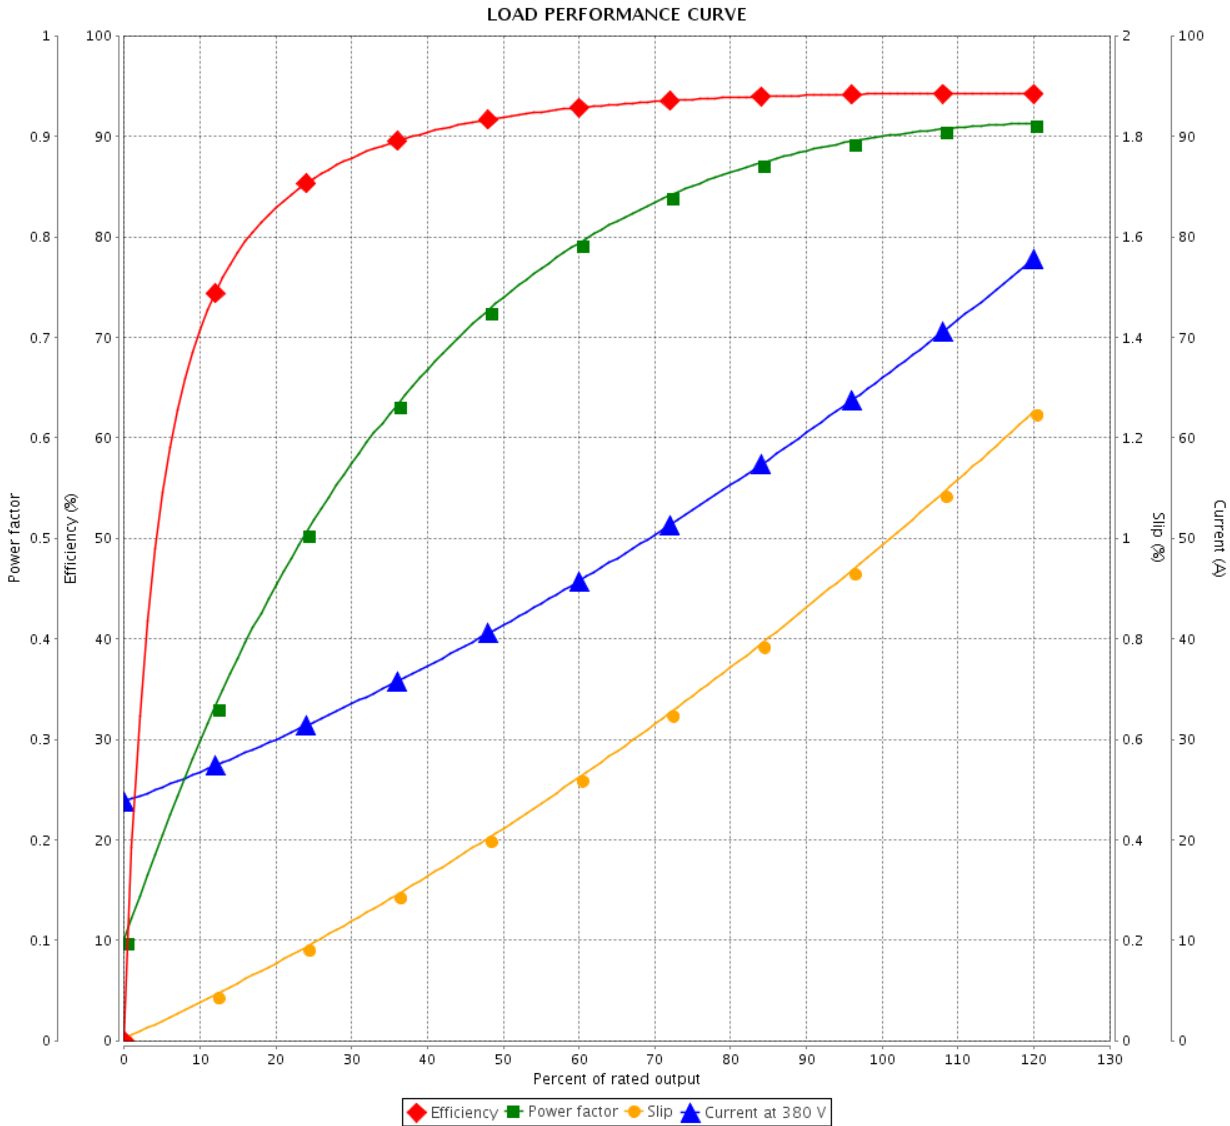

Performance : 380 V 50 Hz 4P IE3

Rated current : 65.7 A  
 LRC : 7.9  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 240 %  
 Breakdown torque : 320 %  
 Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 10 / 36	Revision
Checked by				
Date	04/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

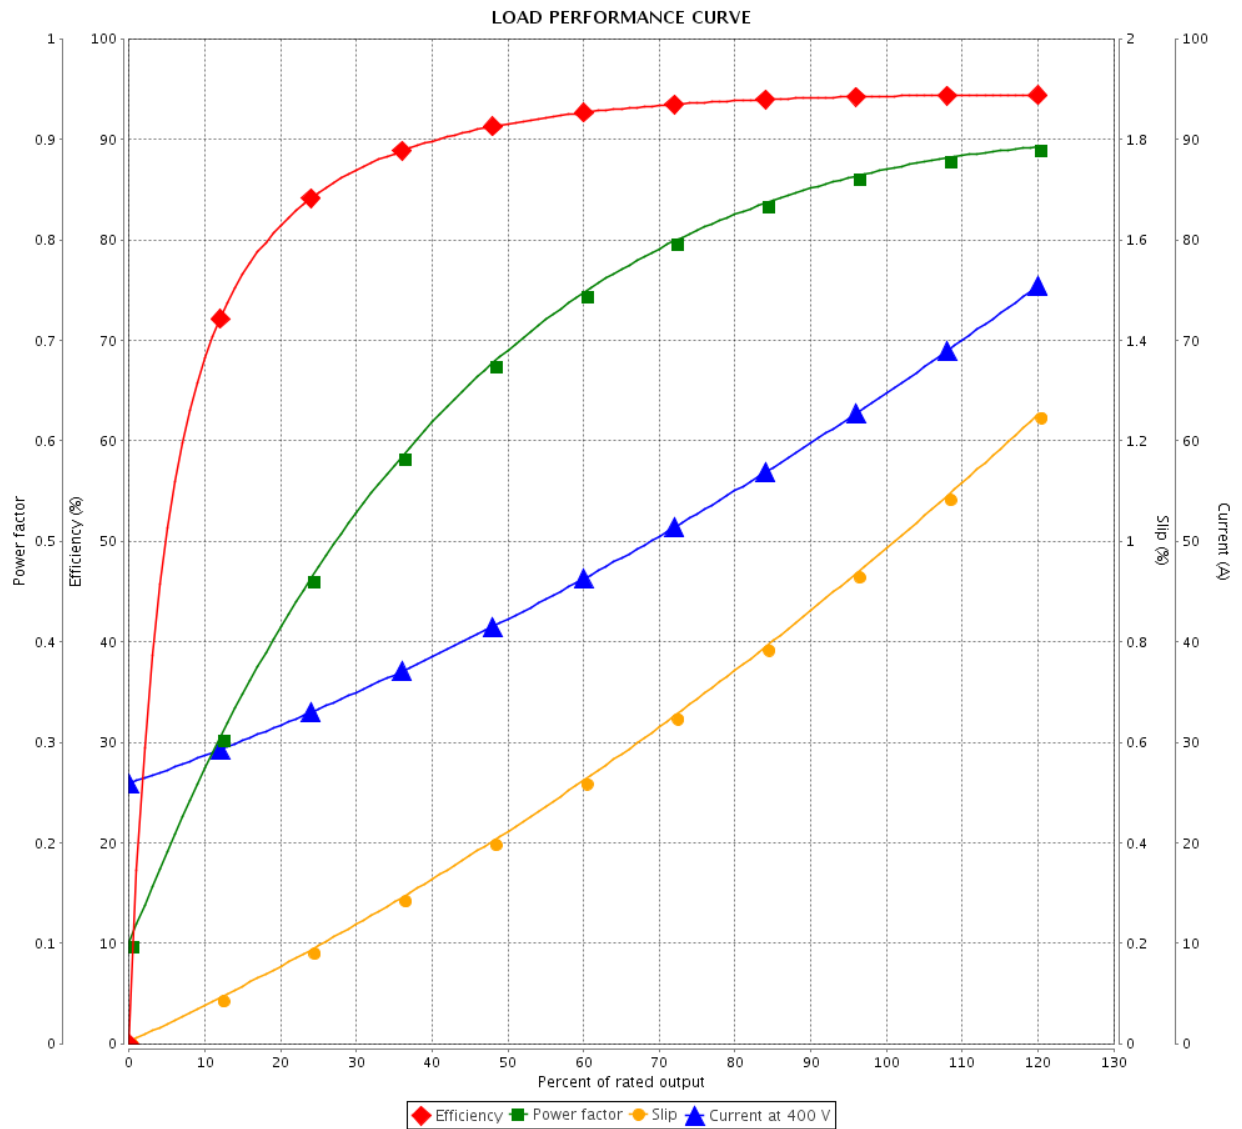

Performance : 400 V 50 Hz 4P IE3

Rated current : 64.5 A  
 LRC : 8.4  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 260 %  
 Breakdown torque : 340 %  
 Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		11 / 36		
Date		04/11/2019		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

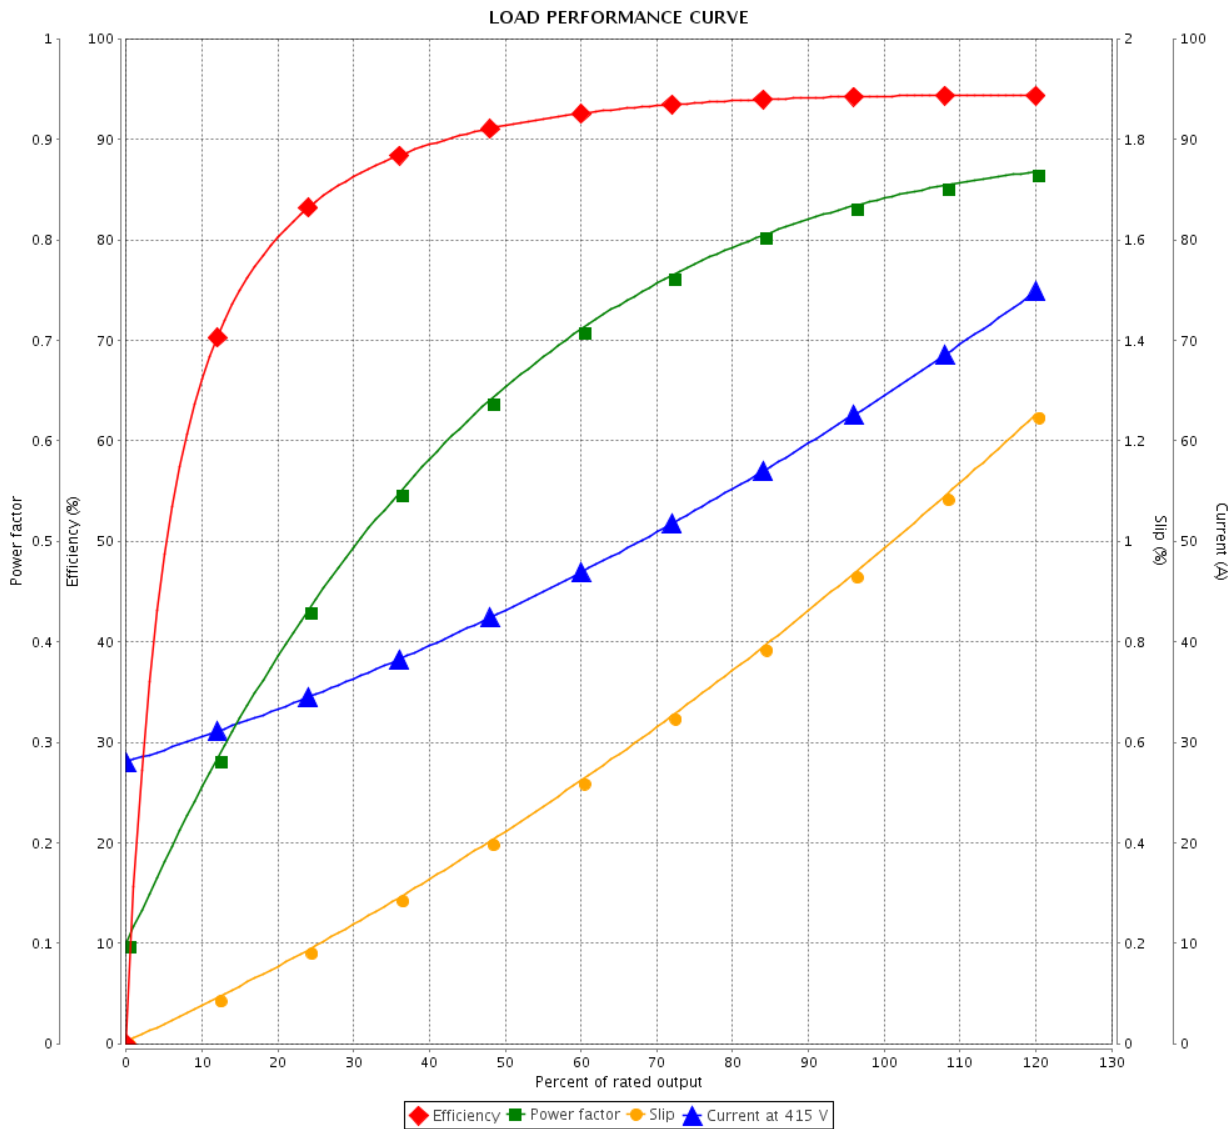

Performance : 415 V 50 Hz 4P IE3

Rated current : 64.4 A  
 LRC : 8.9  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 290 %  
 Breakdown torque : 380 %  
 Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 12 / 36	Revision
Checked by				
Date	04/11/2019			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

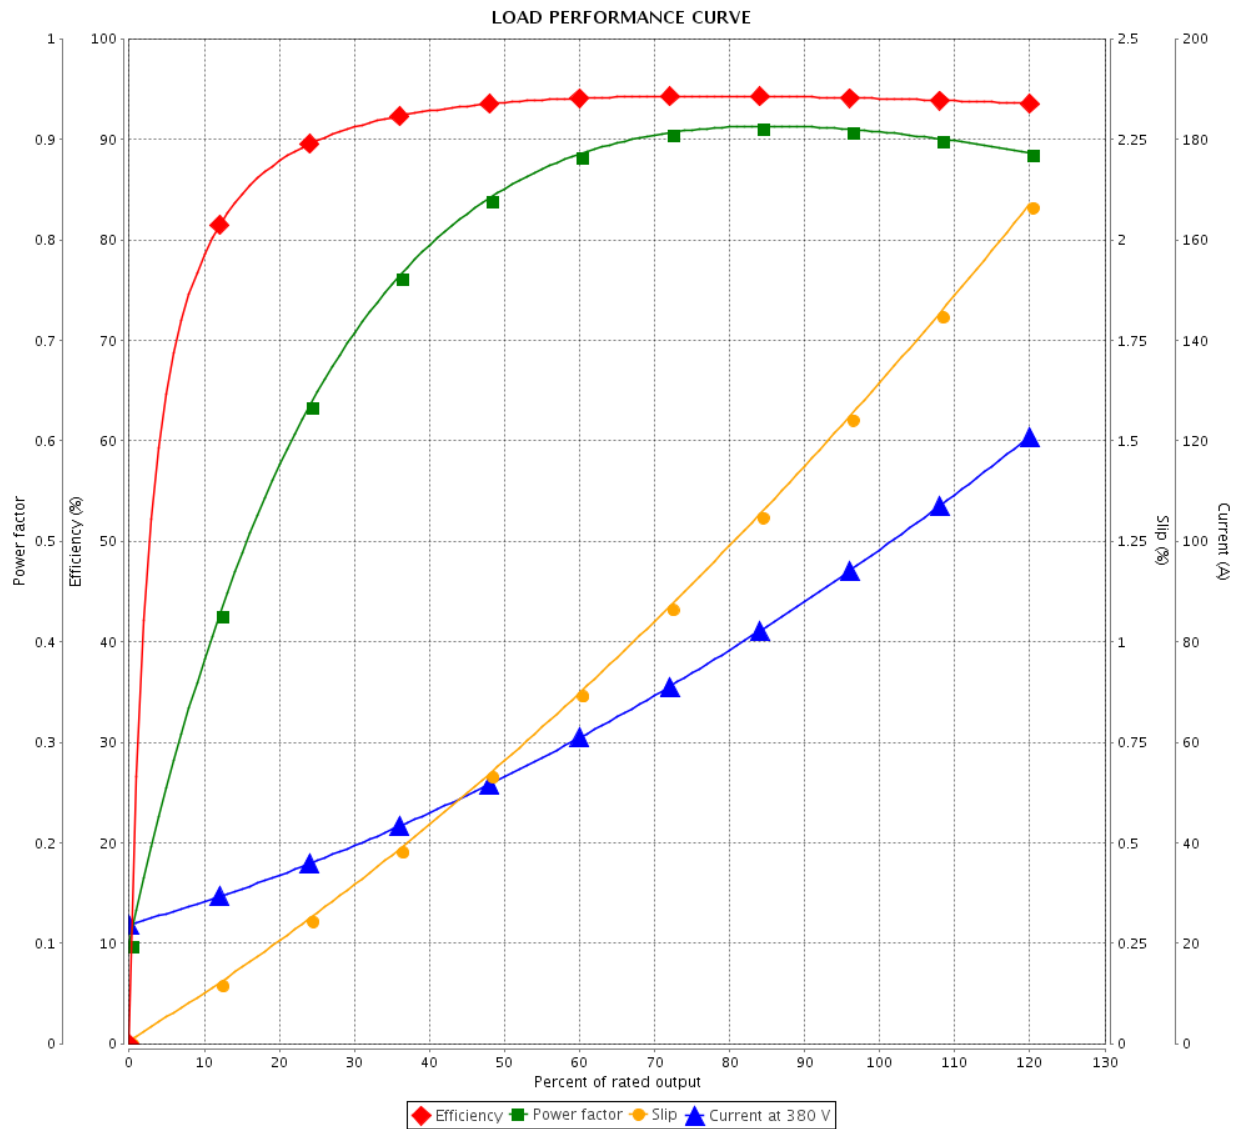

Performance : 380 V 50 Hz 4P IE2

Rated current : 97.6 A  
 LRC : 5.3  
 Rated torque : 263 ft.lb  
 Locked rotor torque : 160 %  
 Breakdown torque : 210 %  
 Rated speed : 1475 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 36		
Date		04/11/2019		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

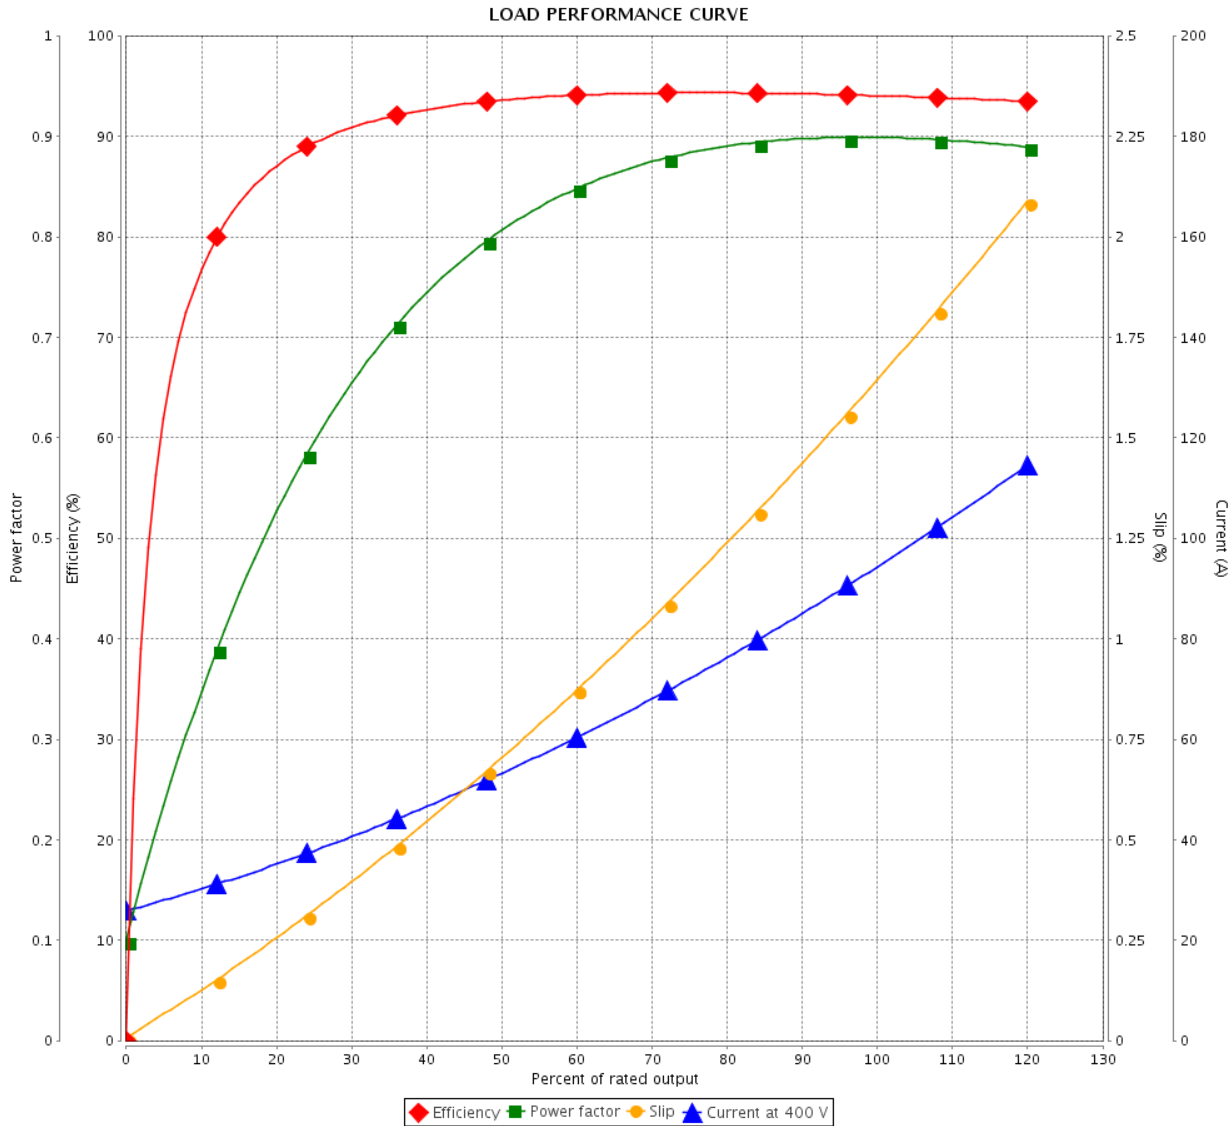

Performance : 400 V 50 Hz 4P IE2

Rated current : 93.7 A  
 LRC : 5.8  
 Rated torque : 263 ft.lb  
 Locked rotor torque : 175 %  
 Breakdown torque : 225 %  
 Rated speed : 1475 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 14 / 36	Revision
Checked by				
Date	04/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

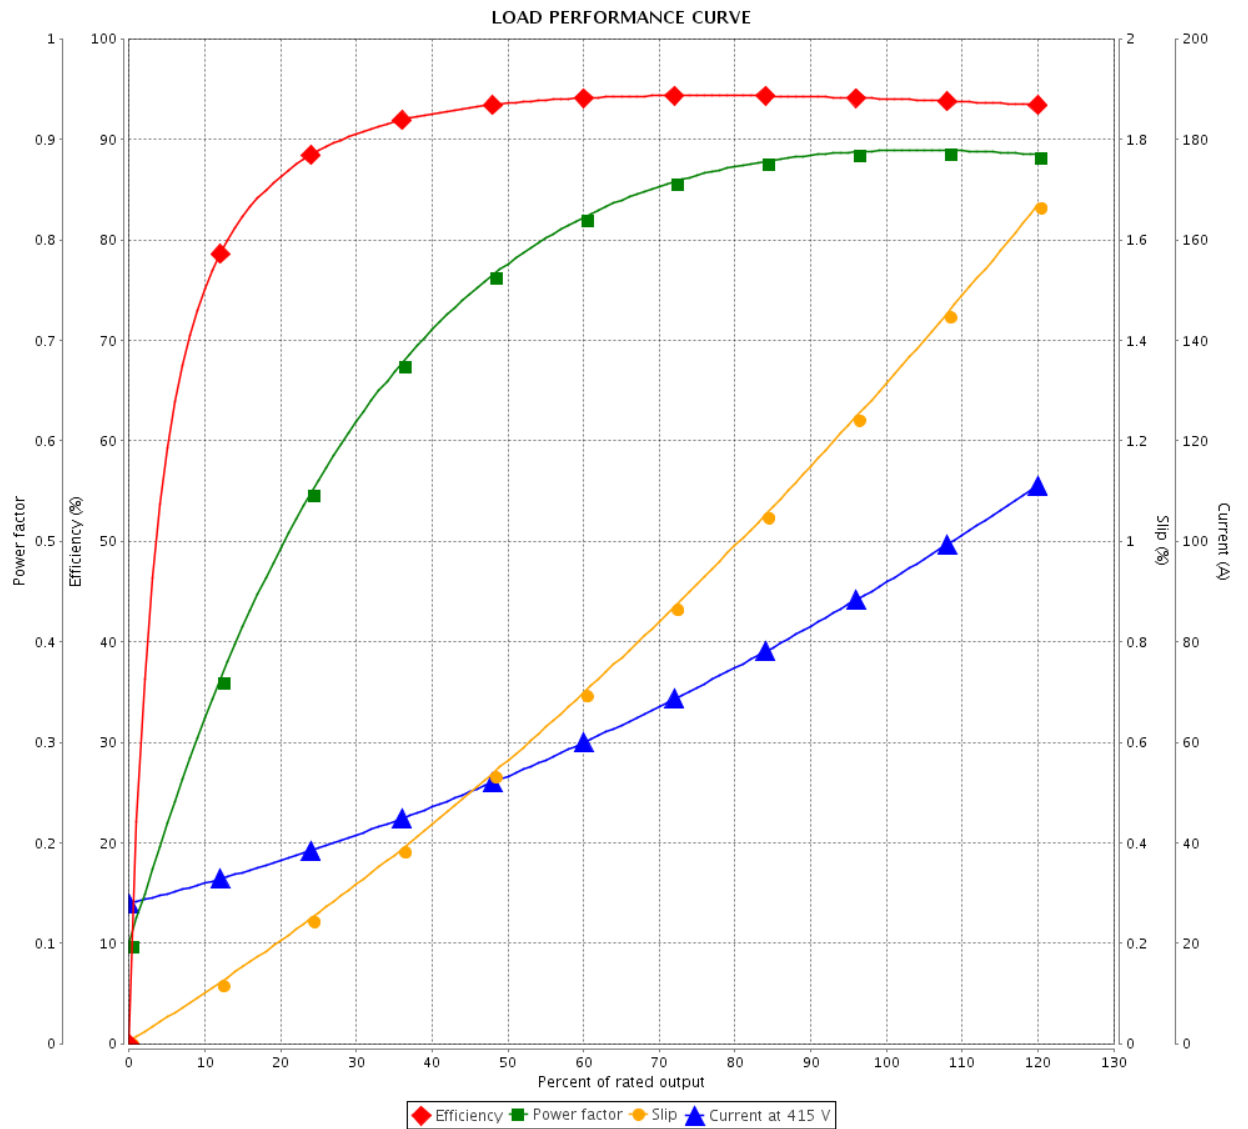

Performance : 415 V 50 Hz 4P IE2

Rated current : 91.4 A  
 LRC : 6.3  
 Rated torque : 263 ft.lb  
 Locked rotor torque : 190 %  
 Breakdown torque : 250 %  
 Rated speed : 1480 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 36		
Date		04/11/2019		

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

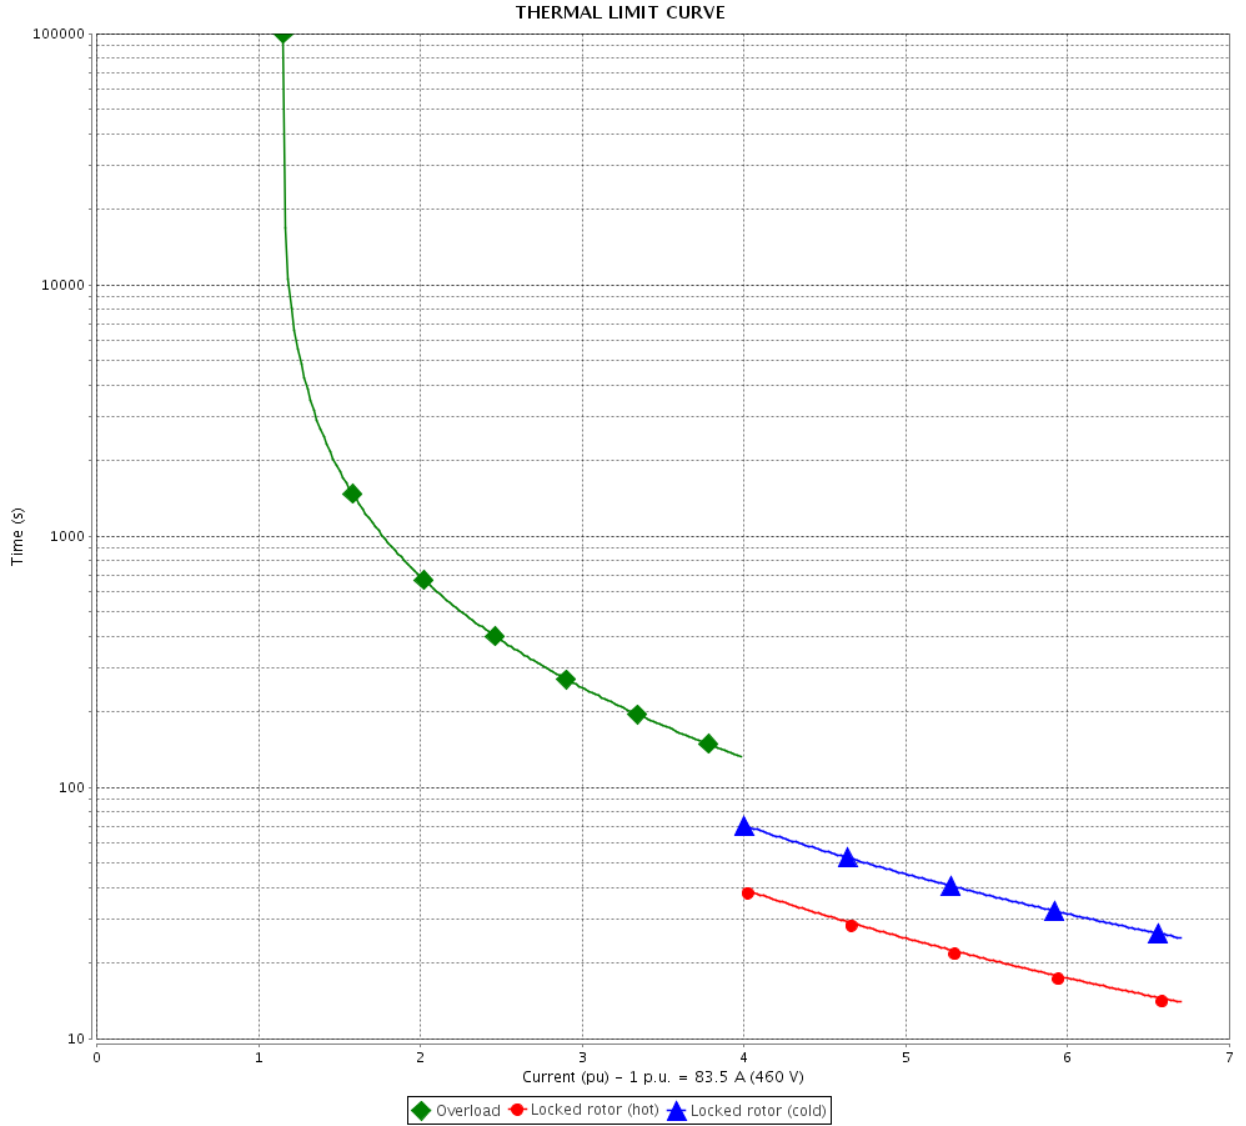


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 17 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

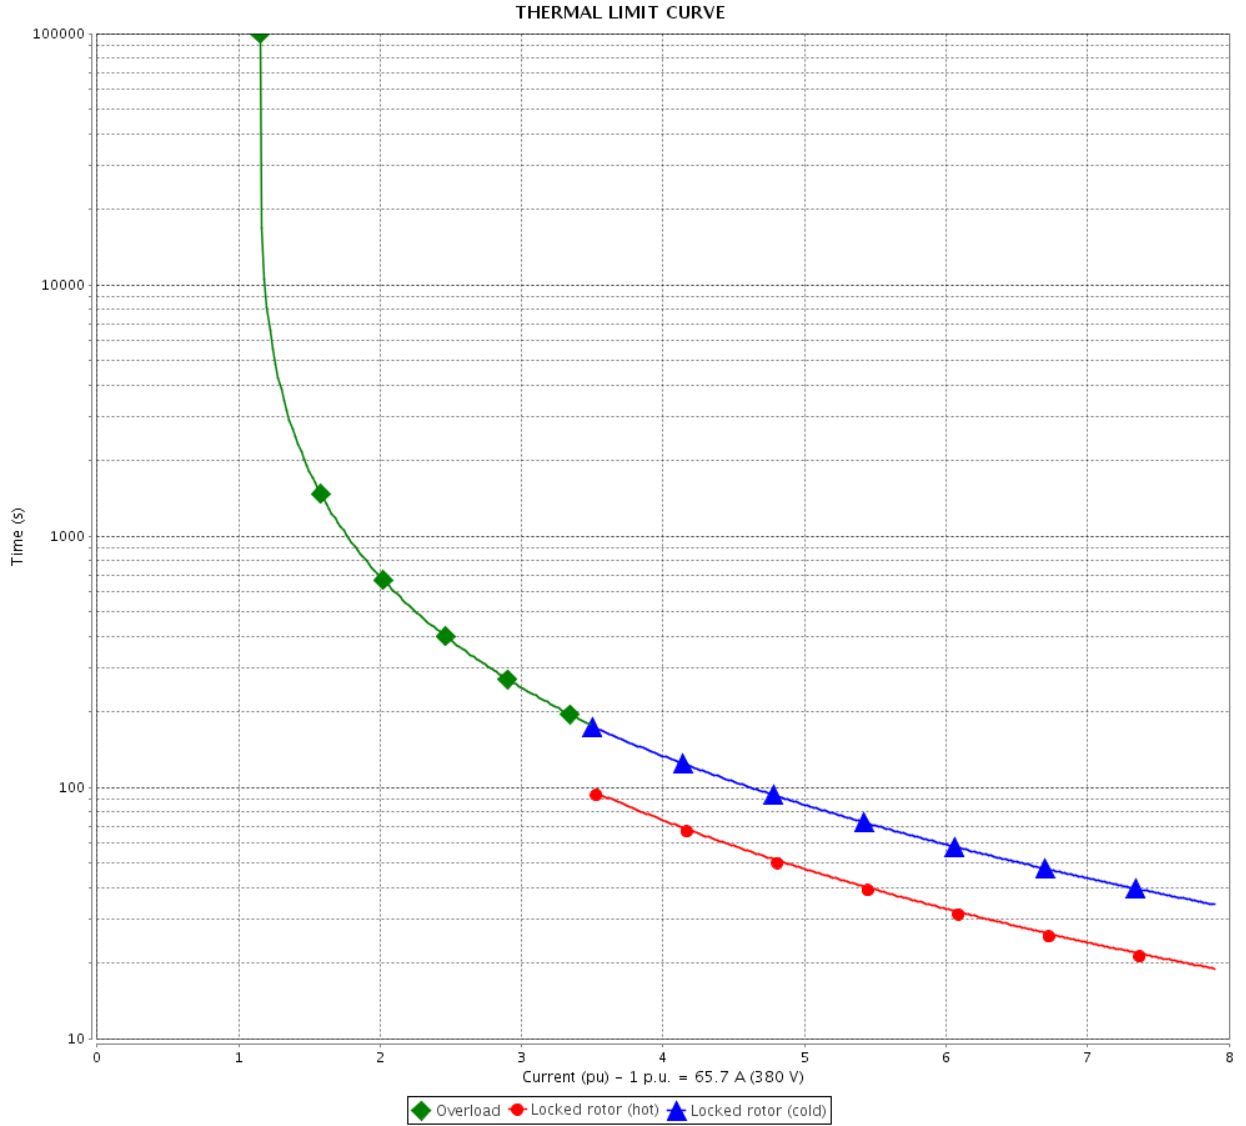


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			19 / 36	

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

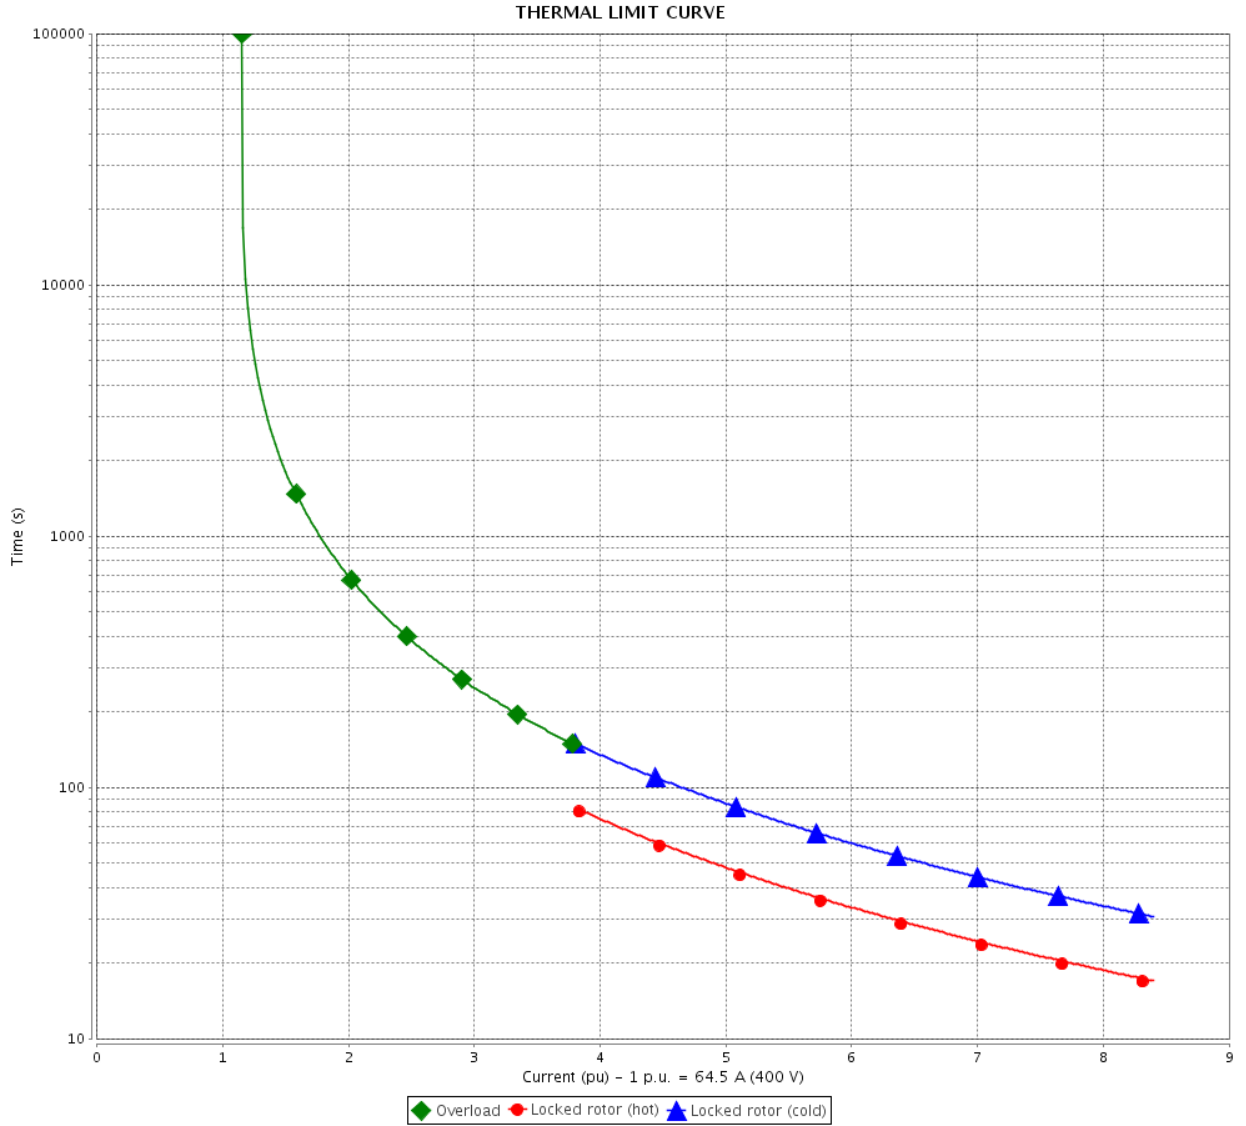


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 21 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

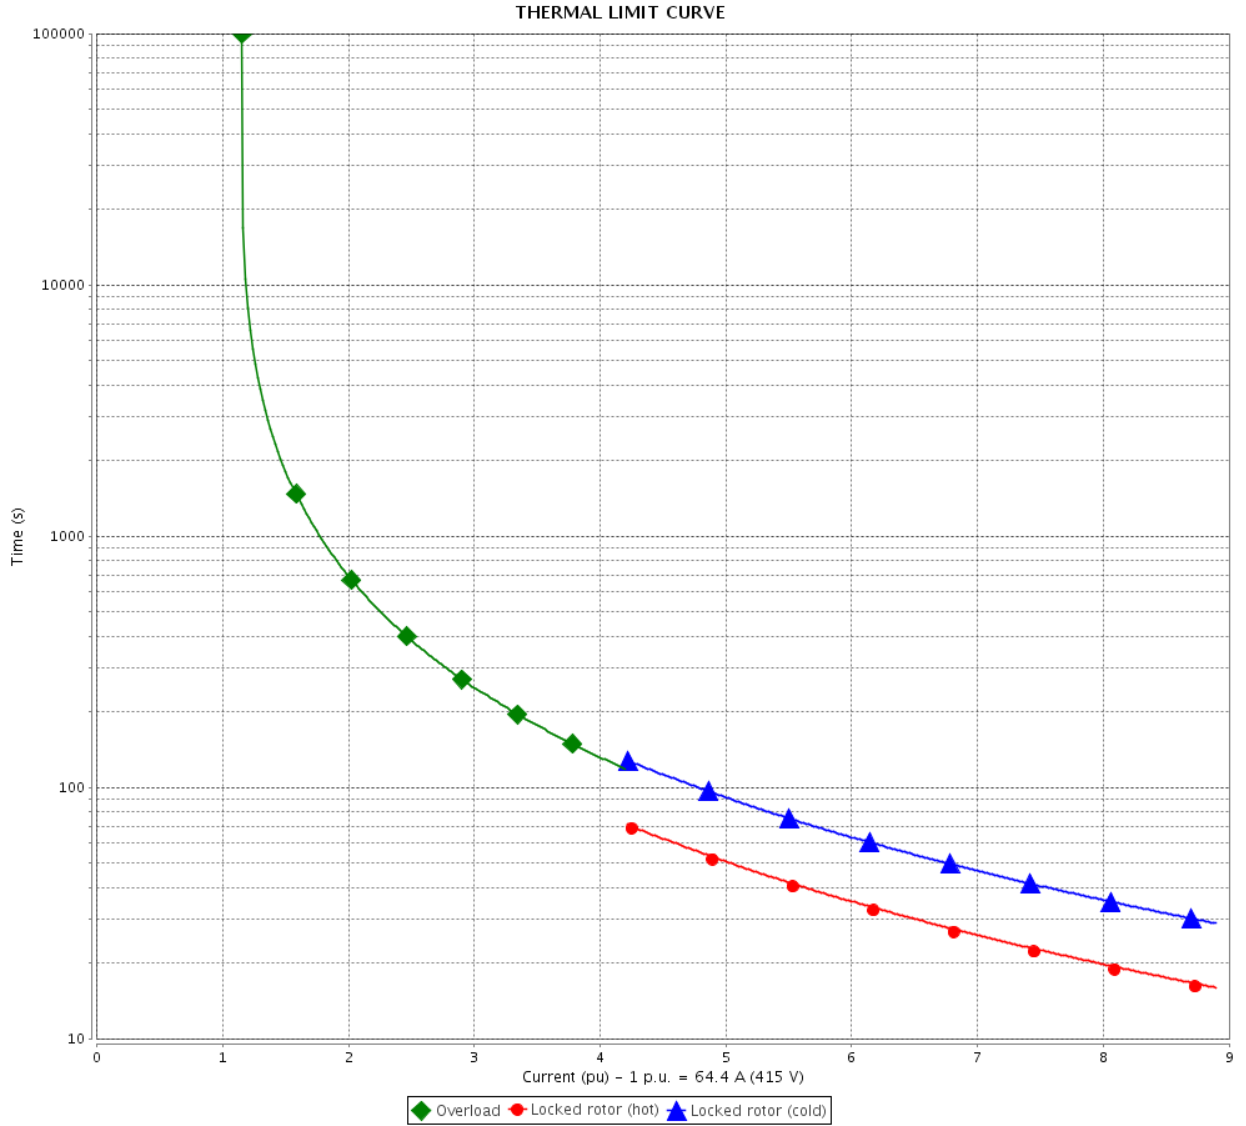


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		23 / 36		
Date		04/11/2019		

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

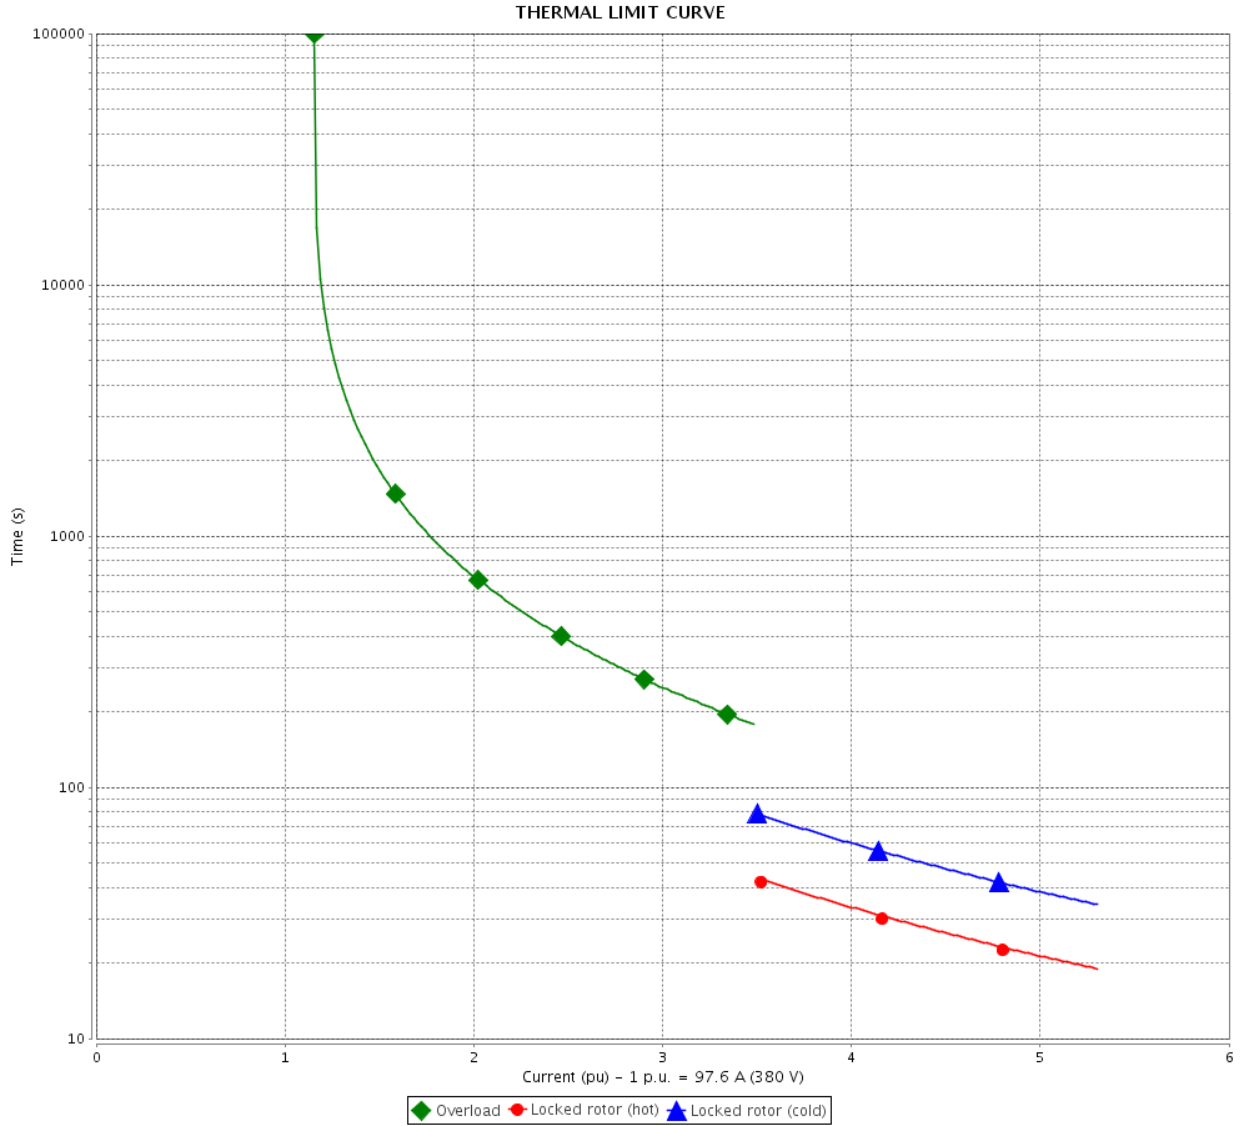


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 25 / 36      Revision		
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

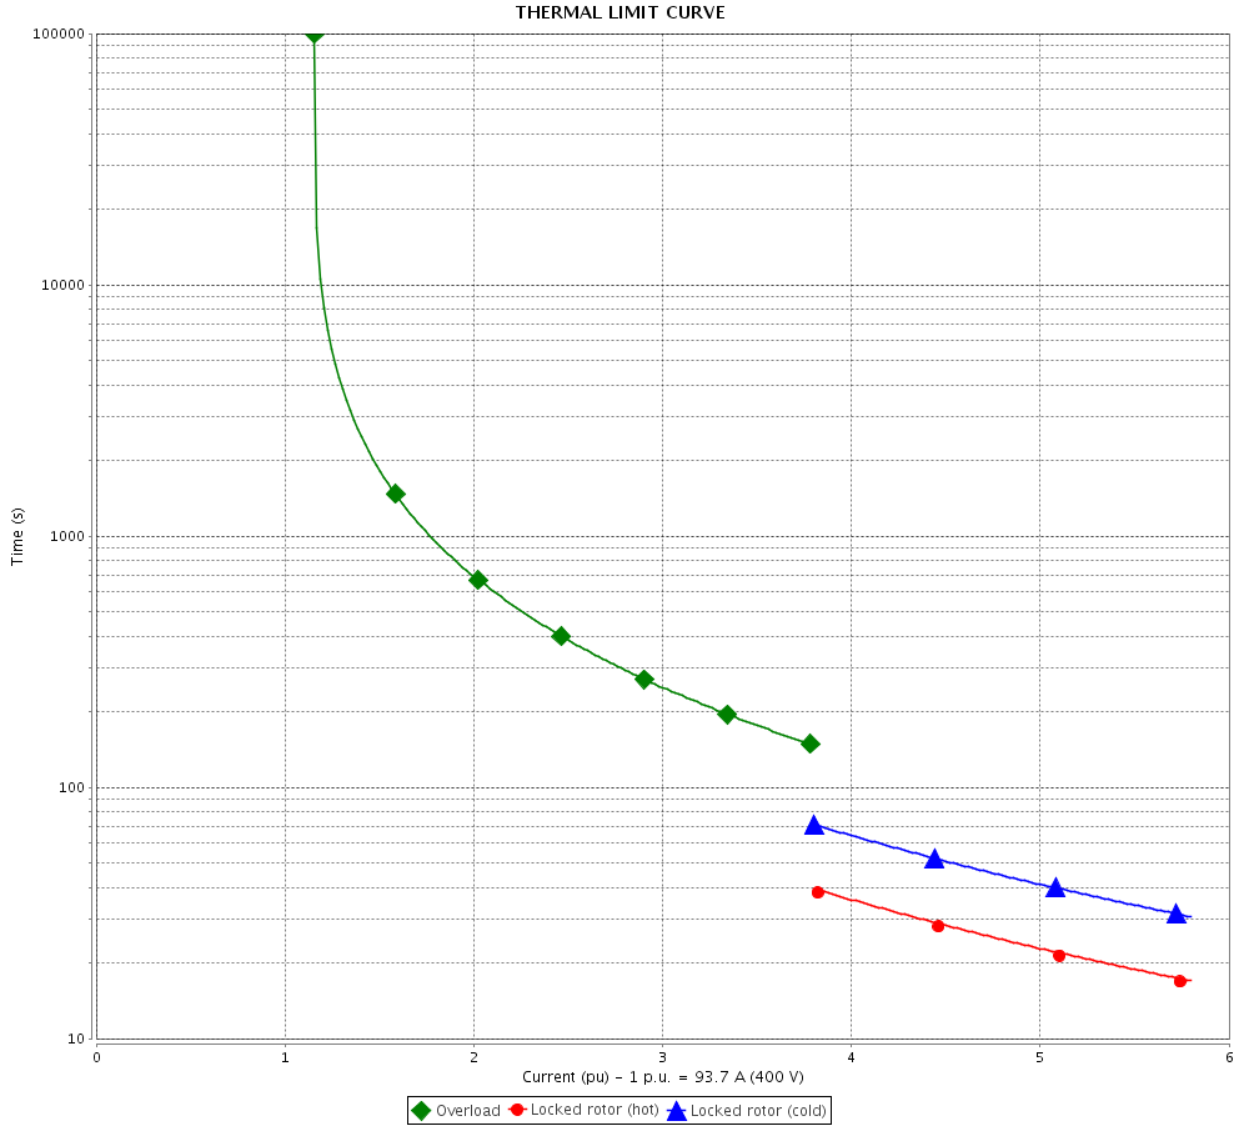


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 27 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

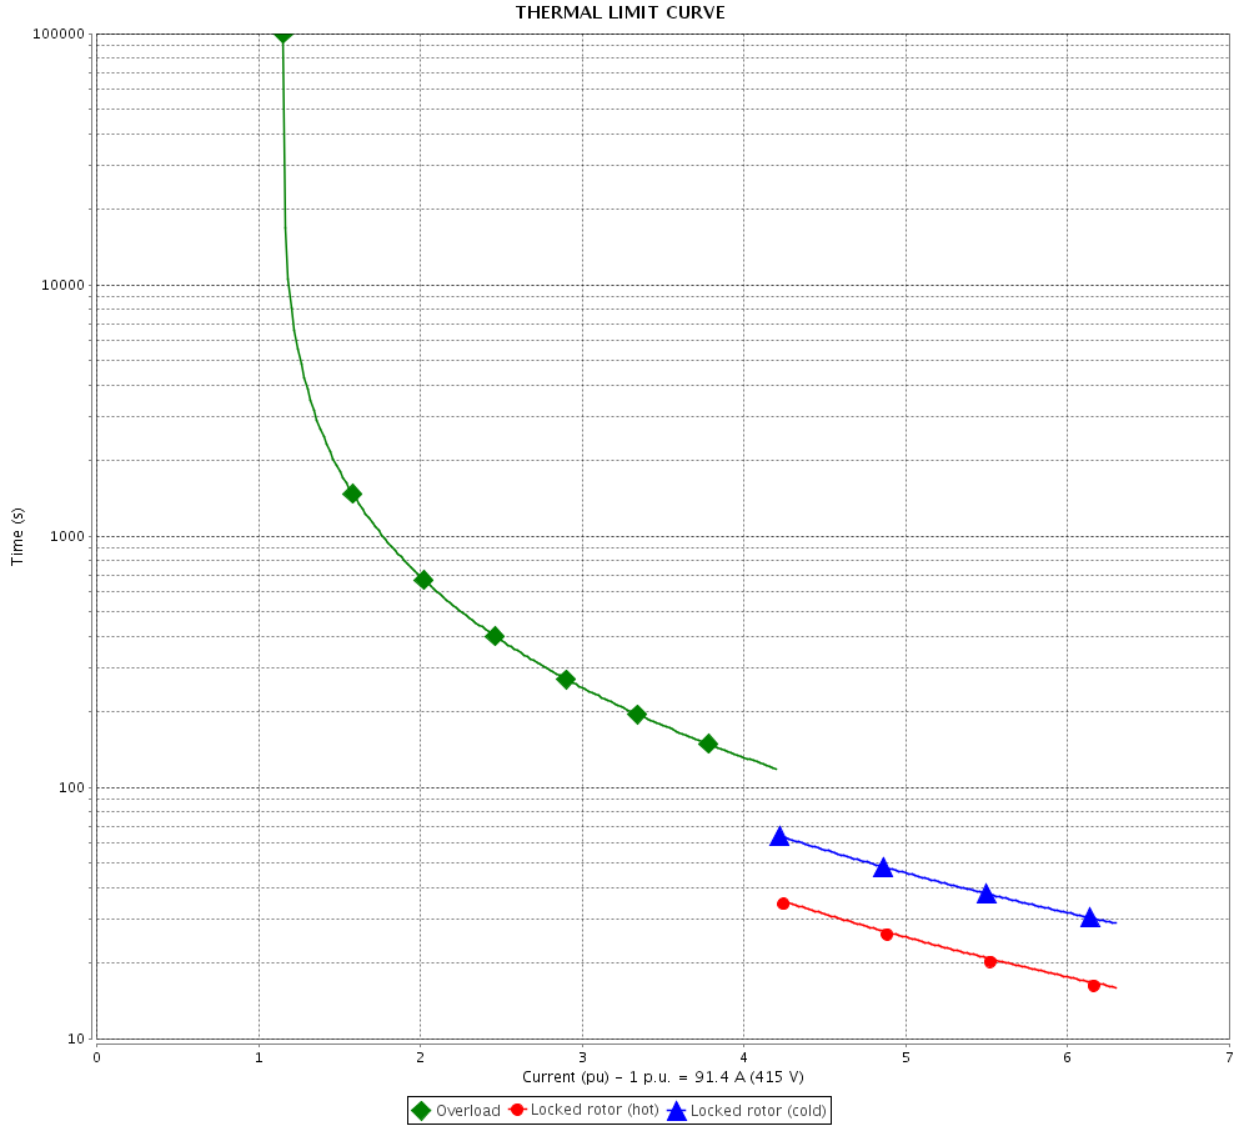

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 29 / 36		Revision
Checked by				
Date				

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

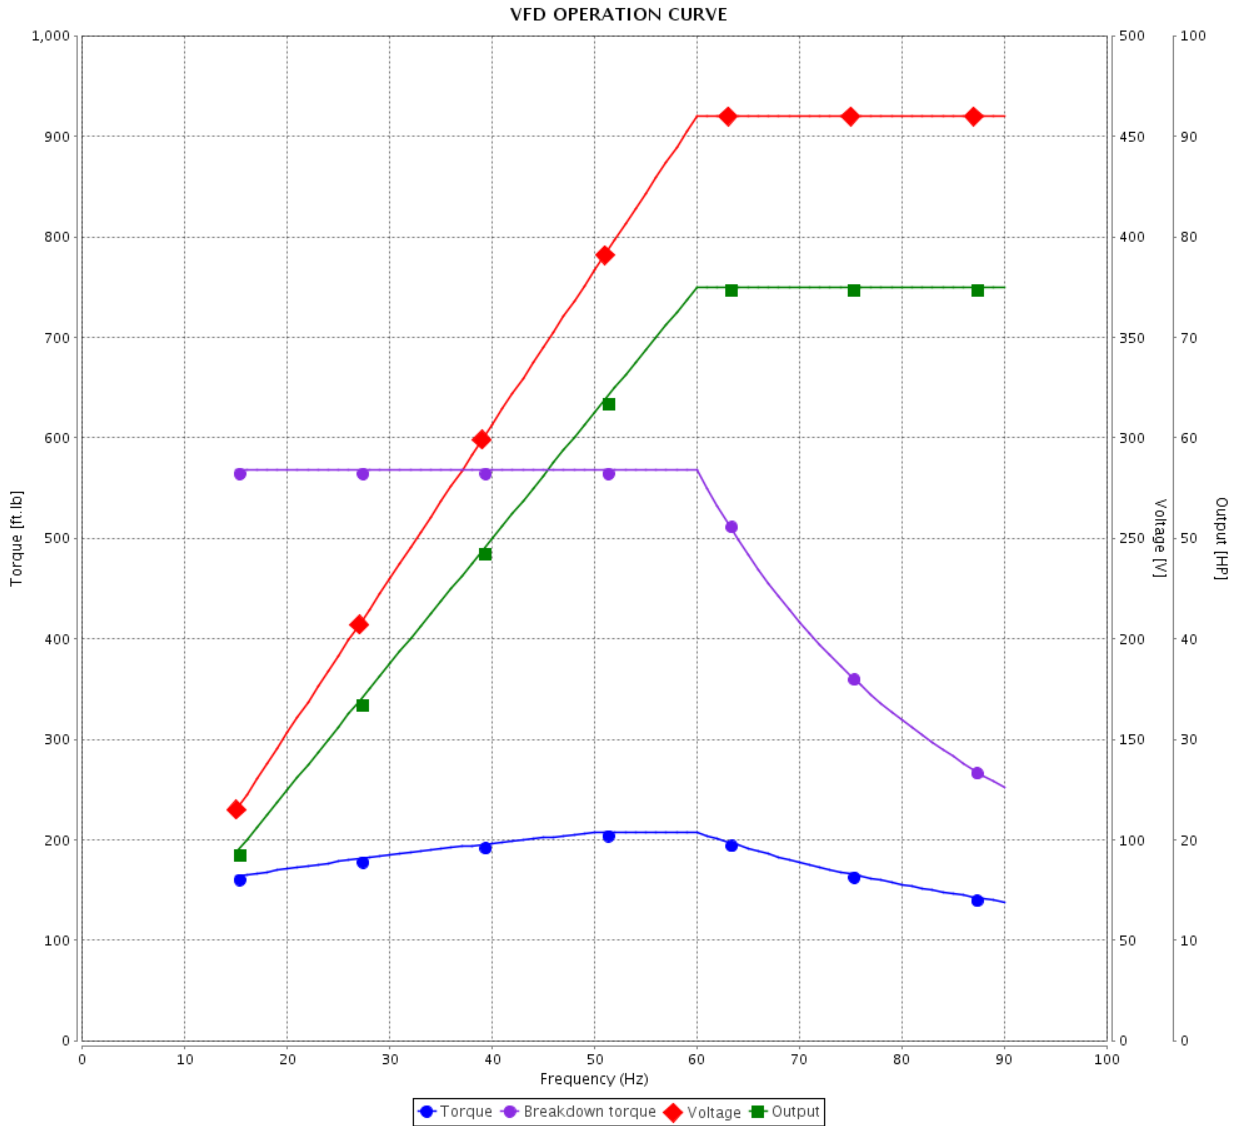

Performance : 460 V 60 Hz 4P

Rated current : 83.5 A  
 LRC : 6.7  
 Rated torque : 218 ft.lb  
 Locked rotor torque : 210 %  
 Breakdown torque : 260 %  
 Rated speed : 1780 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

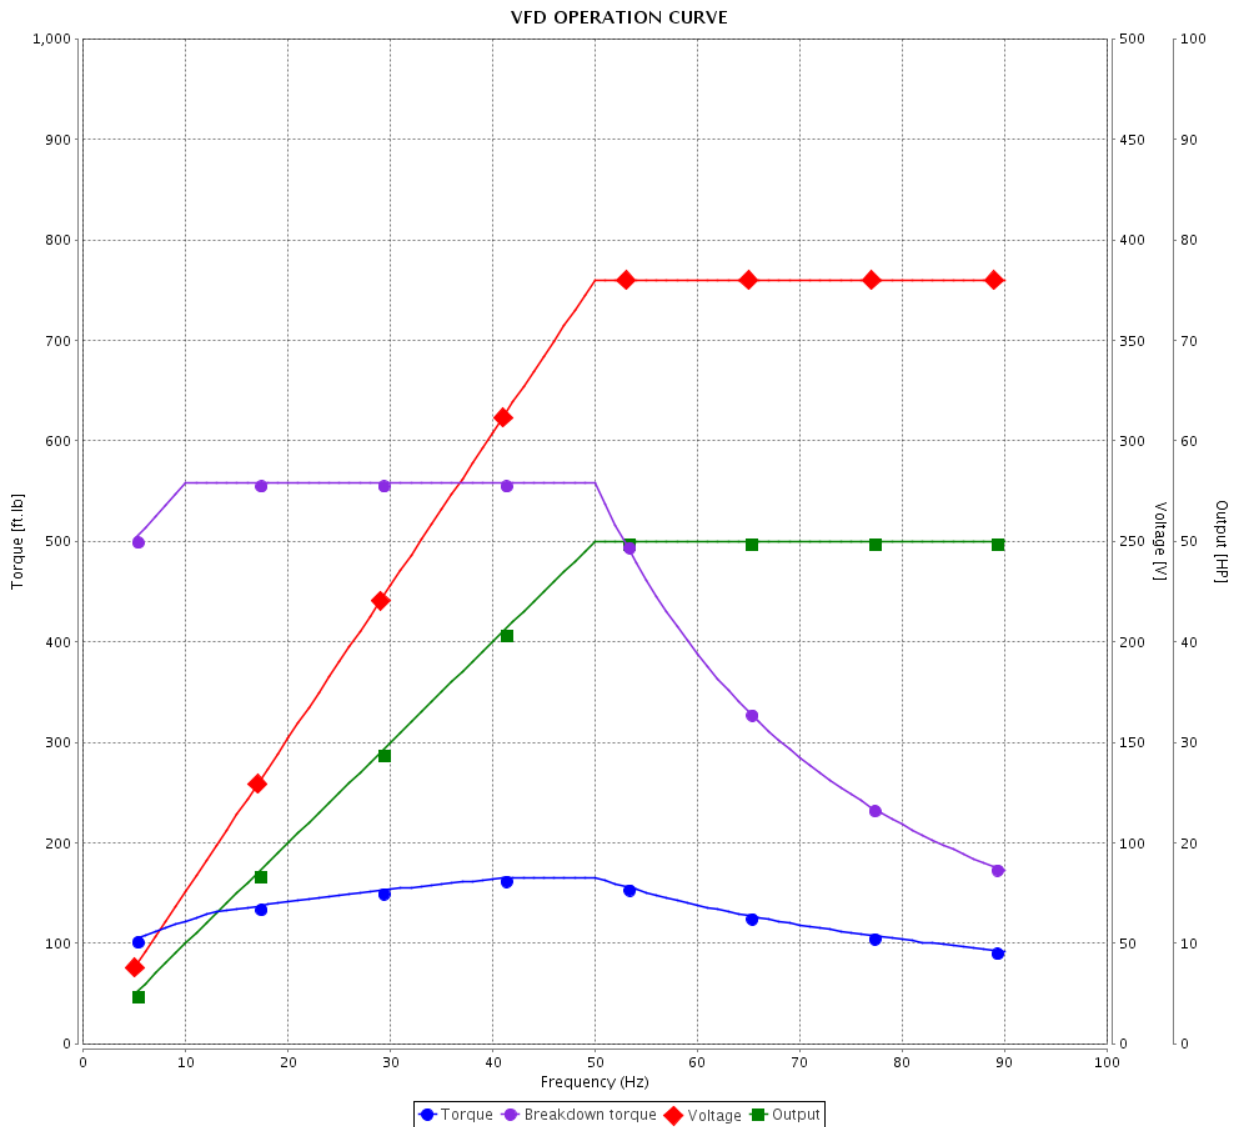

Performance : 380 V 50 Hz 4P IE3

Rated current : 65.7 A  
LRC : 7.9  
Rated torque : 174 ft.lb  
Locked rotor torque : 240 %  
Breakdown torque : 320 %  
Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		31 / 36		
Date	04/11/2019			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

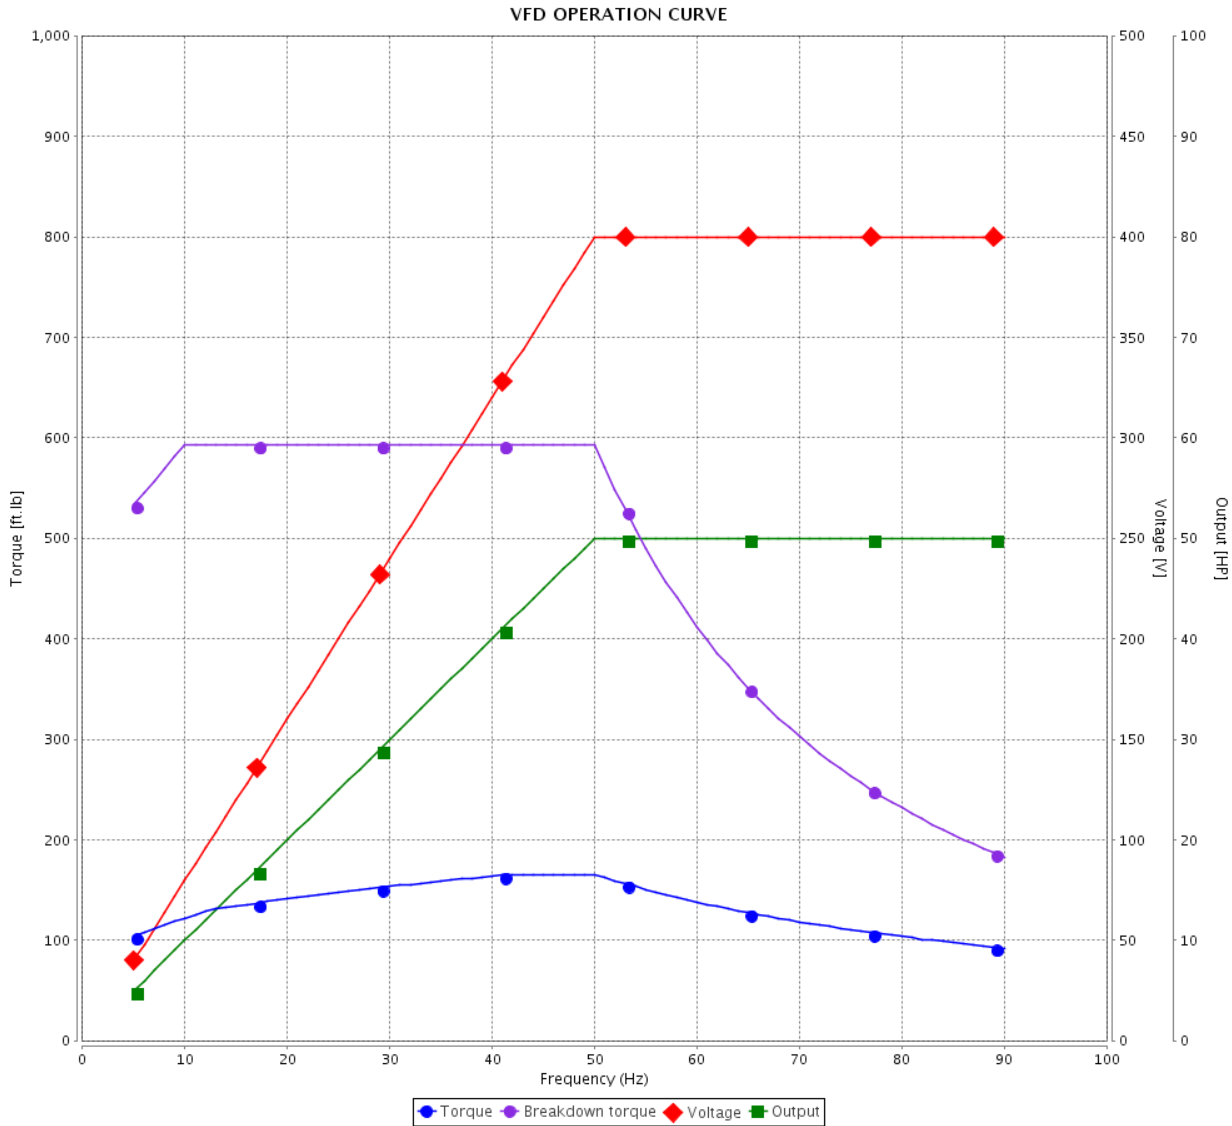

Performance : 400 V 50 Hz 4P IE3

Rated current : 64.5 A  
 LRC : 8.4  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 260 %  
 Breakdown torque : 340 %  
 Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 32 / 36	Revision
Checked by				
Date	04/11/2019			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

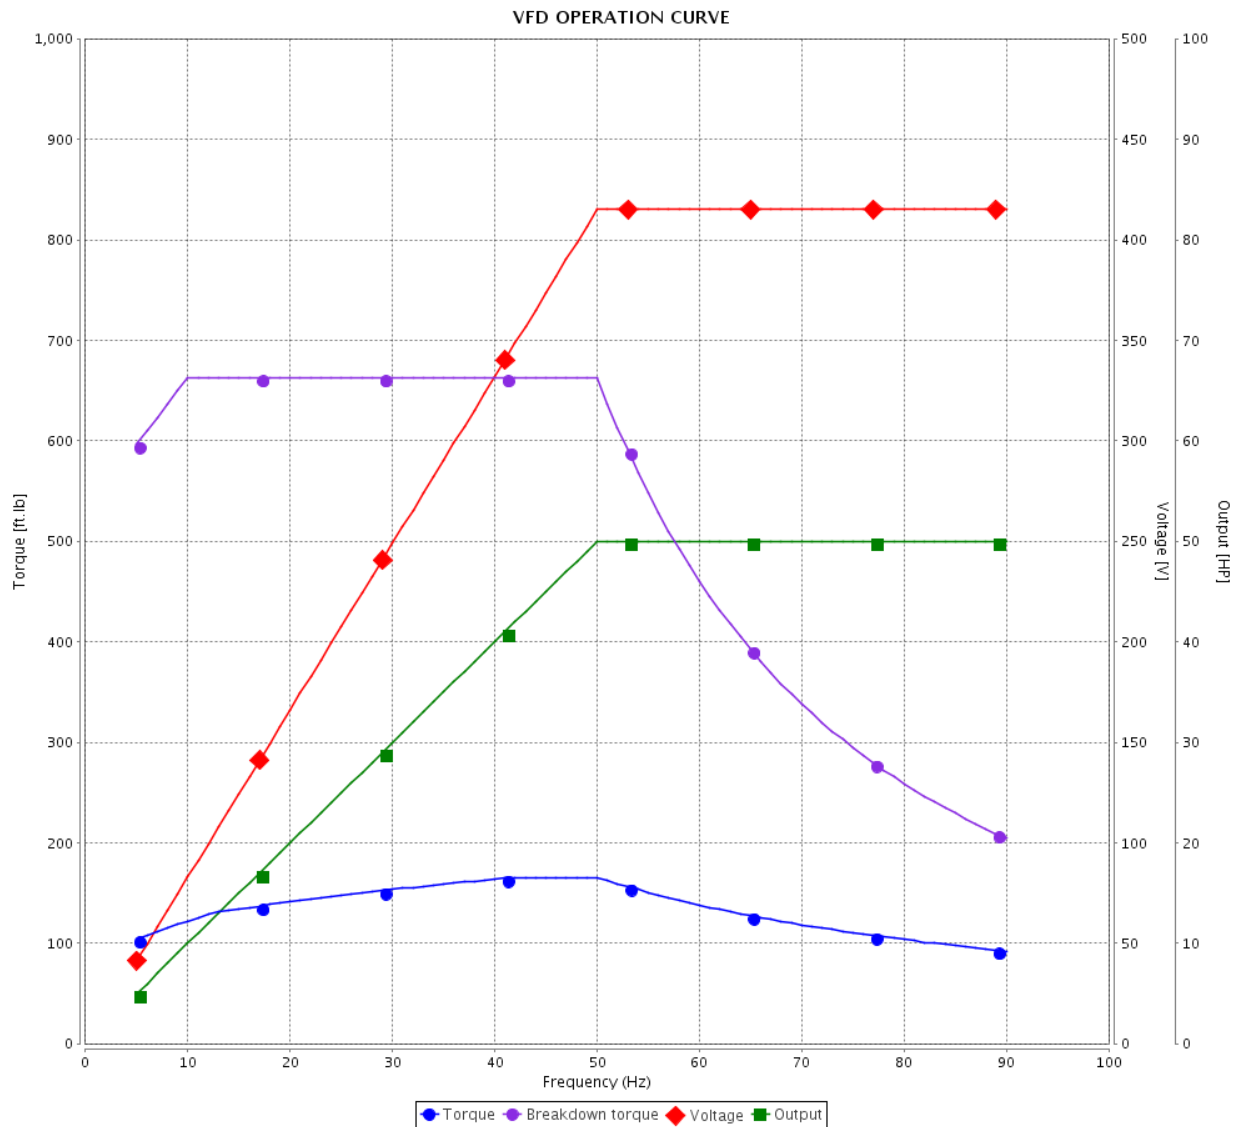

Performance : 415 V 50 Hz 4P IE3

Rated current : 64.4 A  
LRC : 8.9  
Rated torque : 174 ft.lb  
Locked rotor torque : 290 %  
Breakdown torque : 380 %  
Rated speed : 1485 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 33 / 36
Checked by				
Date	04/11/2019			
				Revision

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

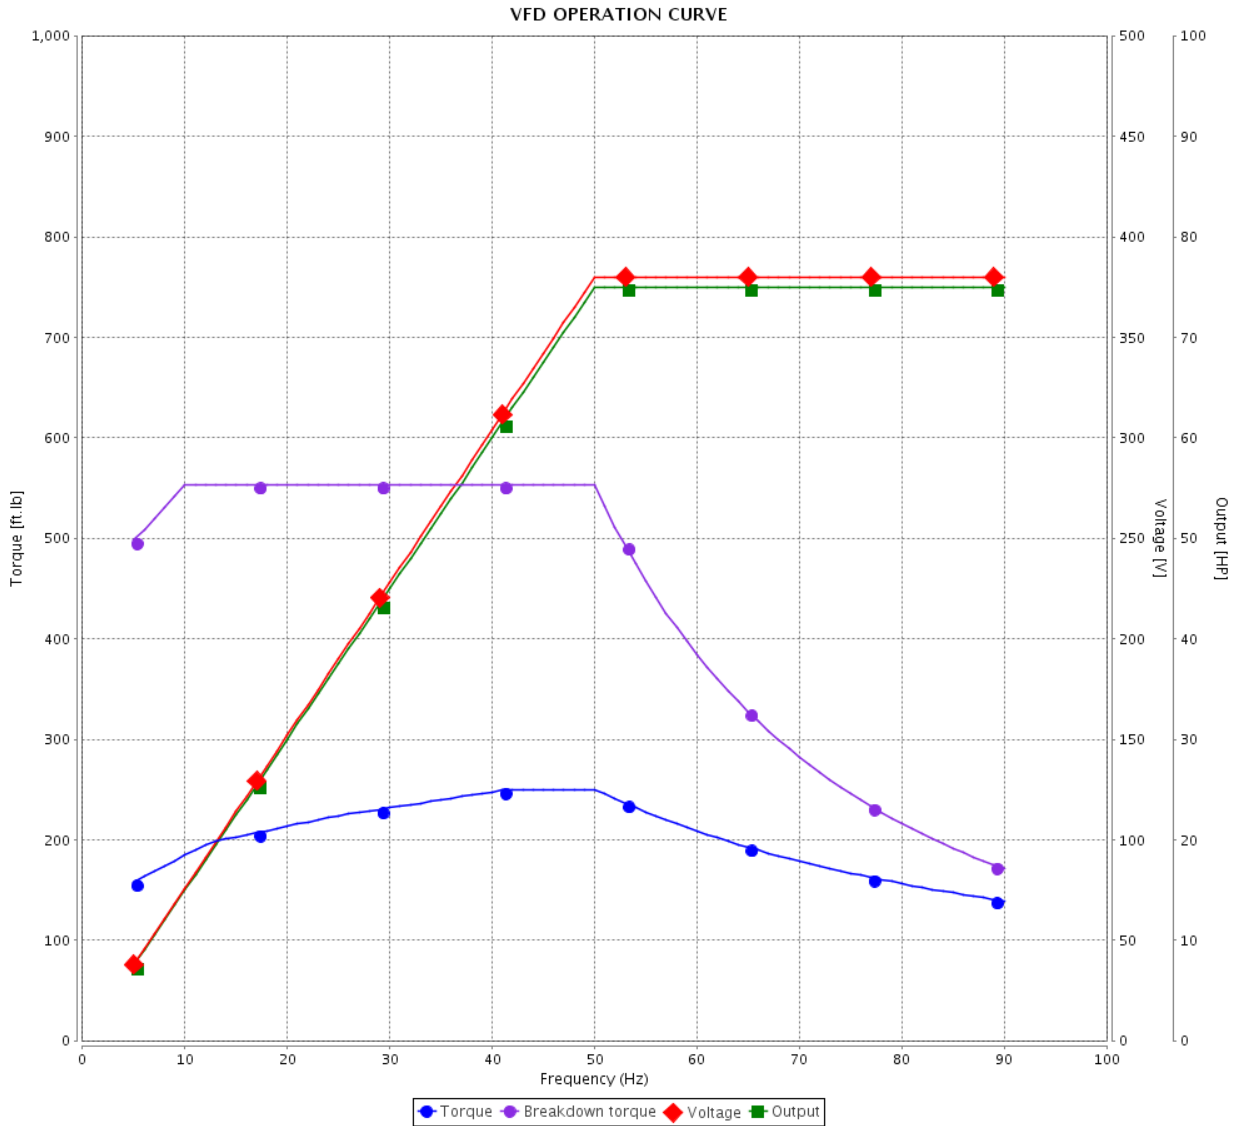

Performance : 380 V 50 Hz 4P IE2

Rated current : 97.6 A  
 LRC : 5.3  
 Rated torque : 263 ft.lb  
 Locked rotor torque : 160 %  
 Breakdown torque : 210 %  
 Rated speed : 1475 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			34 / 36	
Date	04/11/2019			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

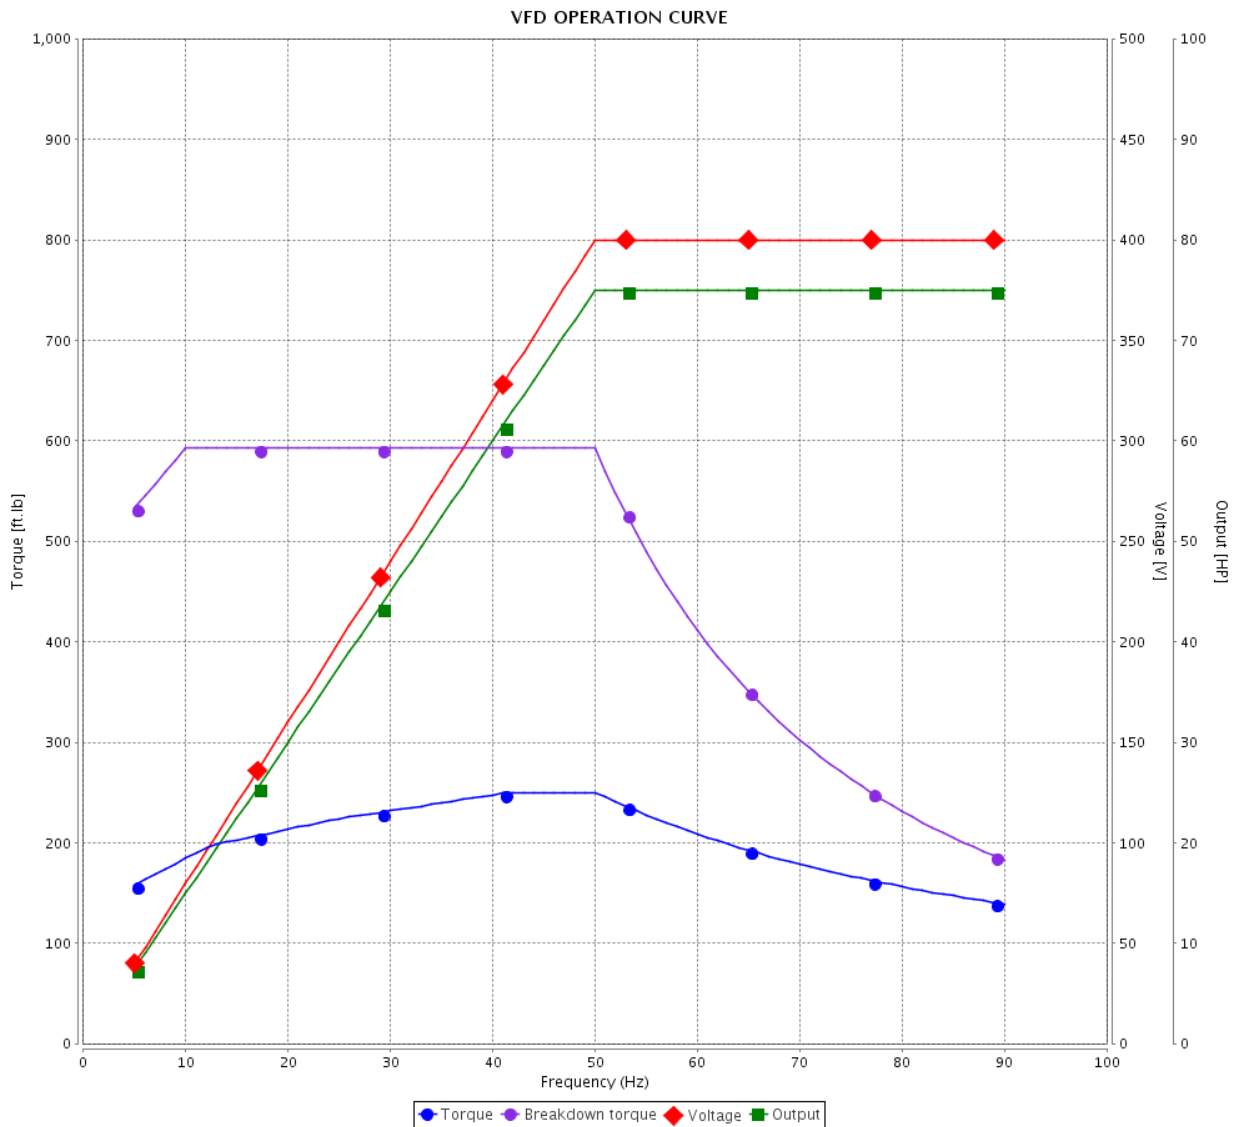

Performance : 400 V 50 Hz 4P IE2

Rated current : 93.7 A  
LRC : 5.8  
Rated torque : 263 ft.lb  
Locked rotor torque : 175 %  
Breakdown torque : 225 %  
Rated speed : 1475 rpm

Moment of inertia (J) : 19.5 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 35 / 36
Checked by				
Date	04/11/2019			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10792682

Catalog # : 07518OT3G365T

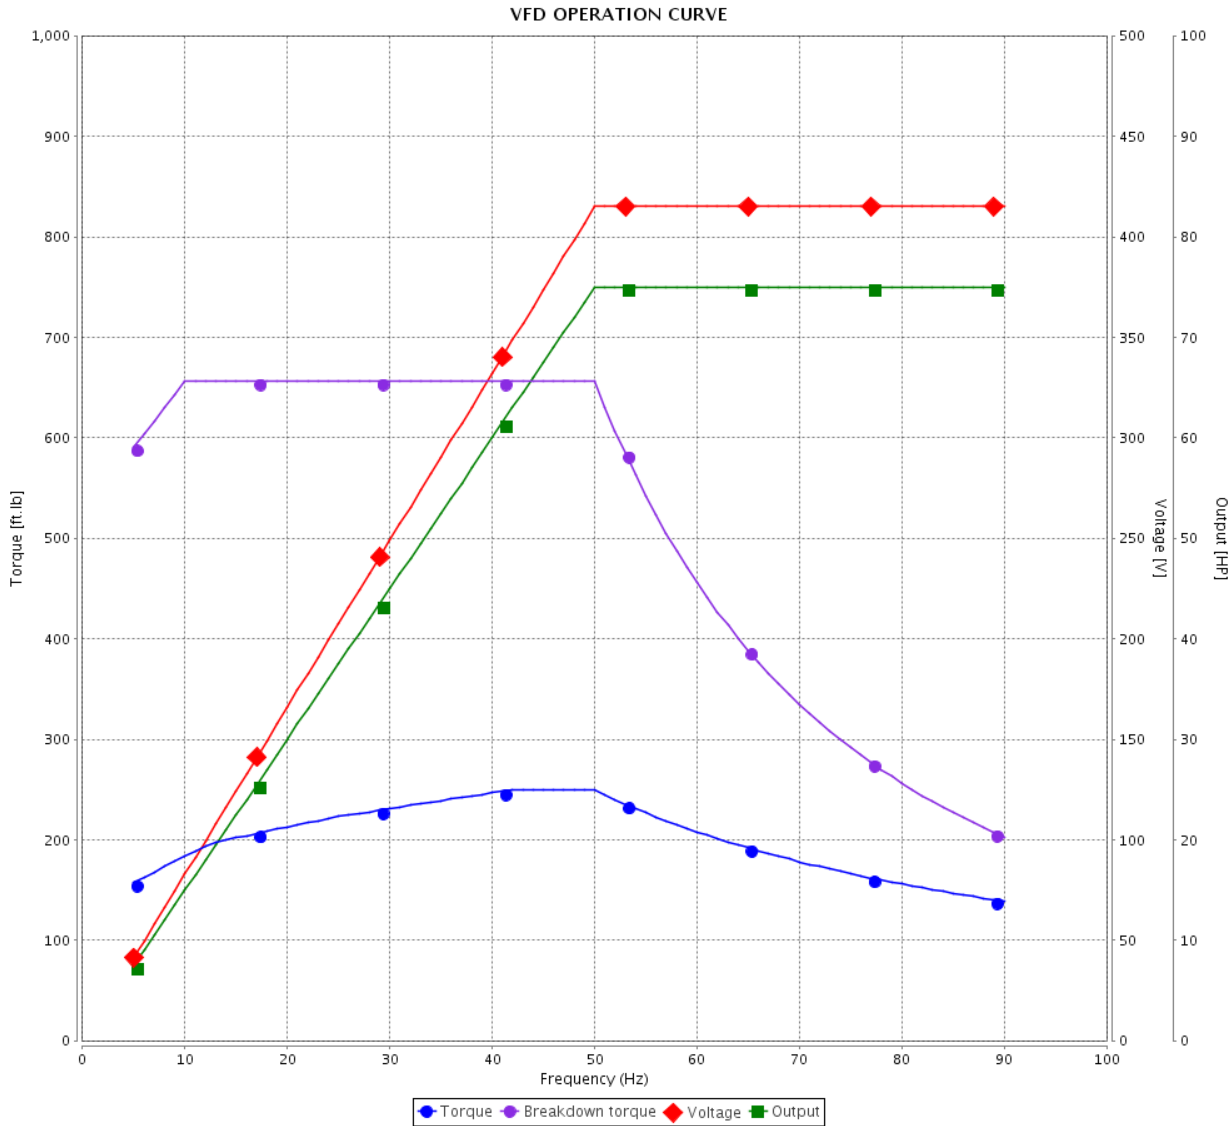




Performance : 415 V 50 Hz 4P IE2

Rated current	: 91.4 A	Moment of inertia (J)	: 19.5 sq.ft.lb
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 263 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			36 / 36	
Date	04/11/2019			

Dimensões em polegada  
Dimensions in inches

THIS IS AN UPDATED REVISION, THE  
PREVIOUS ONE MUST BE DISREGARDED.

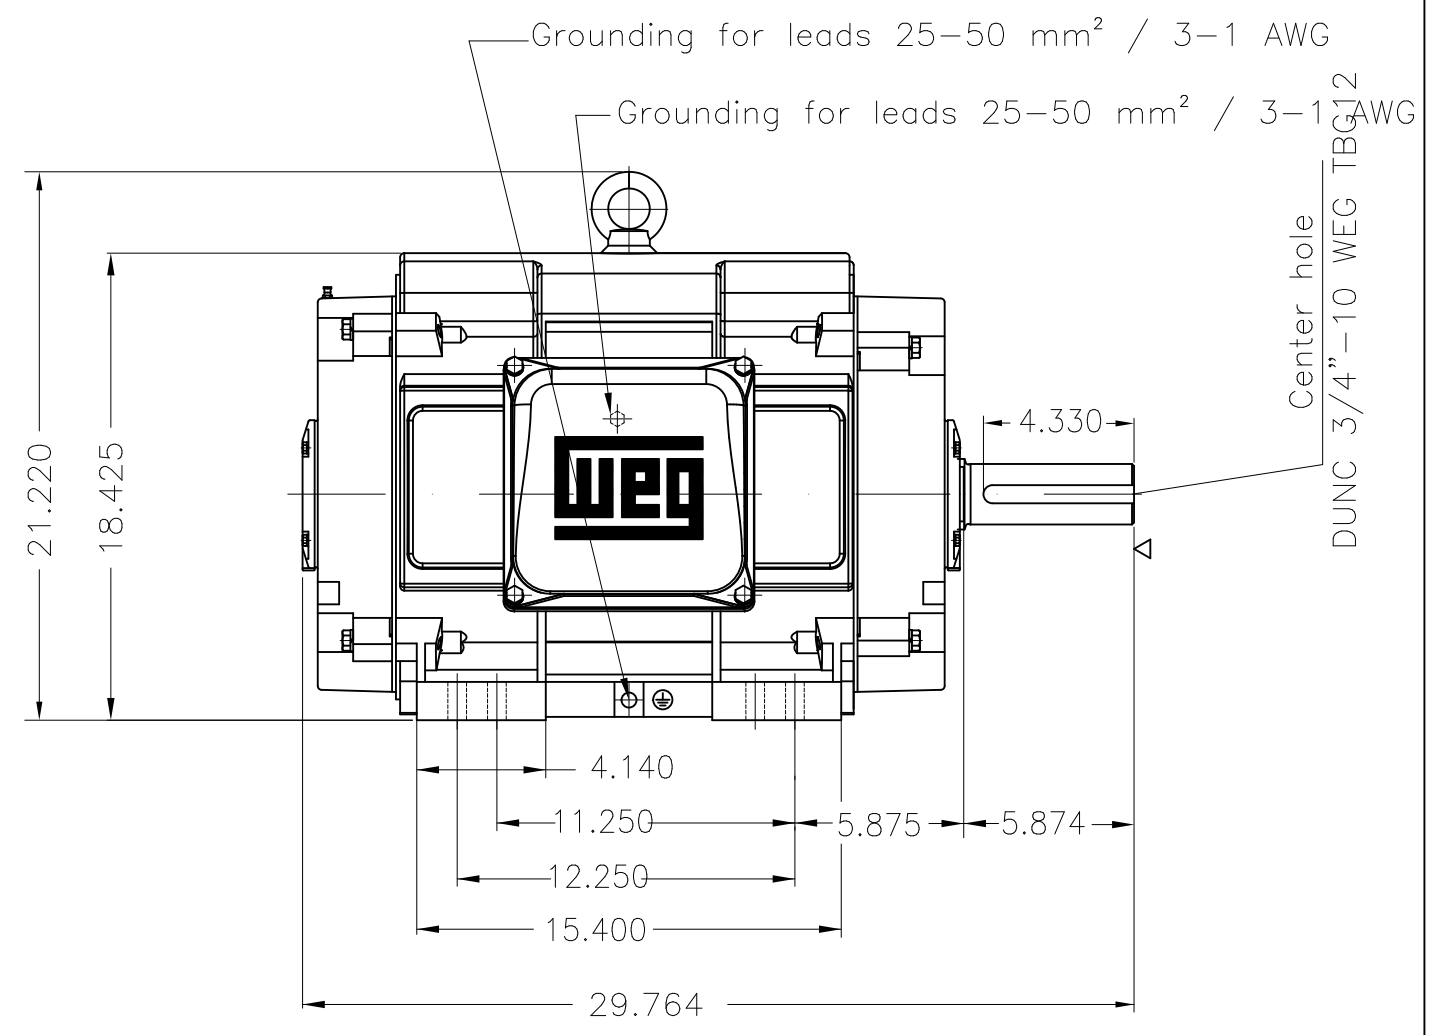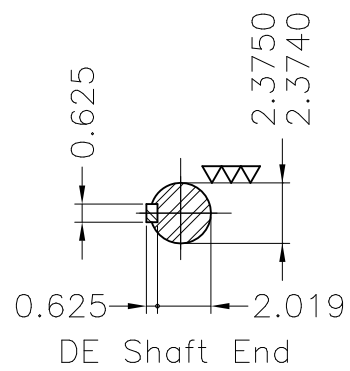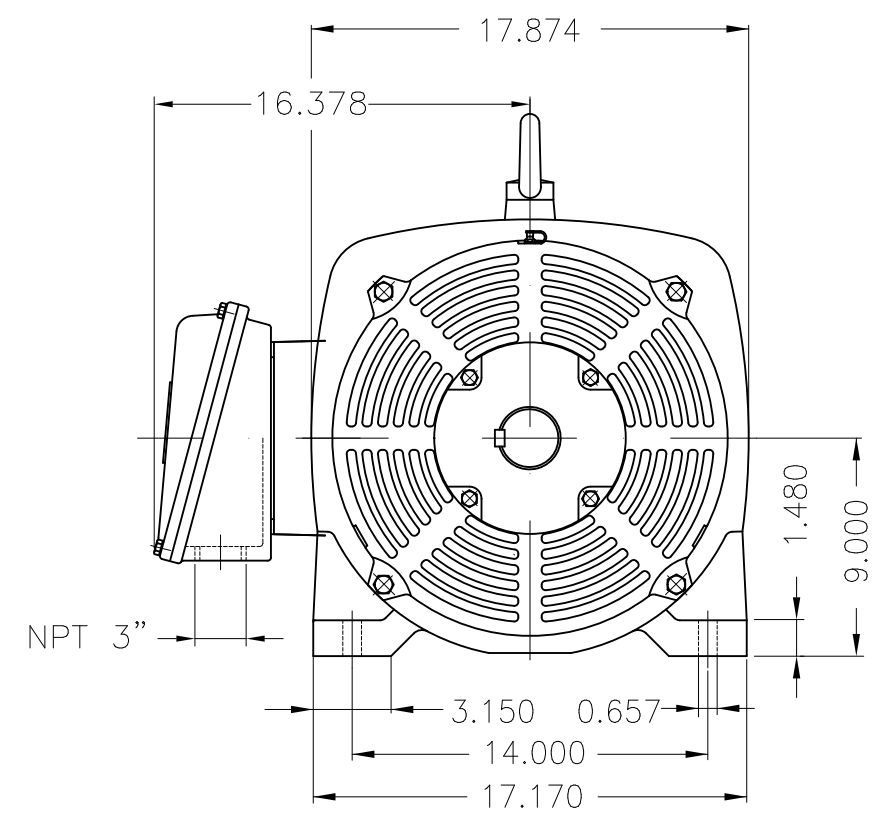

Color RAL 5009  
Painting plan 203A  
Mounting B3R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN	THREE PHASE NEMA P. EFF MOTOR					
CHECKED		FRAME 364/5T IP23 ODP					
RELEASED		WEG code: 10792682					
REL DT	04.11.2019	WMO Jaragua do Sul	Product Engineering	SHEET	1 / 1		

75 HP 04 Poles 60Hz

A

