

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer							
Product line		: ODP NEMA Premium Efficiency Three-Phase		Product code :		10555137	
				Catalog # :		12536OT3E404TS	
Frame		: 404/5TS		Cooling method		: IC01 - ODP	
Insulation class		: F		Mounting		: F-1	
Duty cycle		: Cont.(S1)		Rotation <sup>1</sup>		: Both (CW and CCW)	
Ambient temperature		: -20°C to +40°C		Starting method		: Direct On Line	
Altitude		: 1000 m.a.s.l.		Approx. weight <sup>2</sup>		: 956 lb	
Protection degree		: IP23		Moment of inertia (J)		: 10.2 sq.ft.lb	
Design		: B					
Output [HP]	125	100	100	100	125	125	125
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	208-230/460	380	400	415	380	400	415
Rated current [A]	301-266/133	132	126	122	162	154	151
L. R. Amperes [A]	1955-1729/865	792	832	891	778	816	876
LRC [A]	6.5x(Code F)	6.0x(Code F)	6.6x(Code G)	7.3x(Code H)	4.8x(Code D)	5.3x(Code E)	5.8x(Code F)
No load current [A]	48.3-56.0/28.0	25.0	27.0	30.0	25.0	27.0	30.0
Rated speed [RPM]	3560	2965	2965	2970	2950	2955	2960
Slip [%]	1.11	1.17	1.17	1.00	1.67	1.50	1.33
Rated torque [ft.lb]	182	175	175	174	220	219	219
Locked rotor torque [%]	180	210	229	240	170	180	190
Breakdown torque [%]	280	229	260	280	180	210	220
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	19s (cold) 11s (hot)	21s (cold) 12s (hot)	18s (cold) 10s (hot)	14s (cold) 8s (hot)	21s (cold) 12s (hot)	18s (cold) 10s (hot)	14s (cold) 8s (hot)
Noise level <sup>2</sup>	84.0 dB(A)						
Efficiency (%)	25%	94.0	91.1	91.0	90.9	92.9	93.4
	50%	94.1	92.6	92.5	92.4	93.0	93.0
	75%	94.5	93.1	93.1	93.1	93.0	93.0
	100%	94.5	94.7	94.7	94.7	93.0	92.4
Power Factor	25%	0.62	0.62	0.59	0.56	0.68	0.66
	50%	0.83	0.80	0.79	0.77	0.85	0.84
	75%	0.88	0.88	0.88	0.87	0.89	0.89
	100%	0.90	0.91	0.91	0.90	0.91	0.90
Bearing type	: <u>Drive end</u> 6314 C3 <u>Non drive end</u> 6314 C3		Foundation loads				
Sealing	: Without Without		Max. traction : 985 lb				
	: Bearing Seal Bearing Seal		Max. compression : 1941 lb				
Lubrication interval	: 14418 h 14418 h						
Lubricant amount	: 27 g 27 g						
Lubricant type	: Mobil Polyrex EM						
Notes							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	06/11/2019				1 / 36		

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

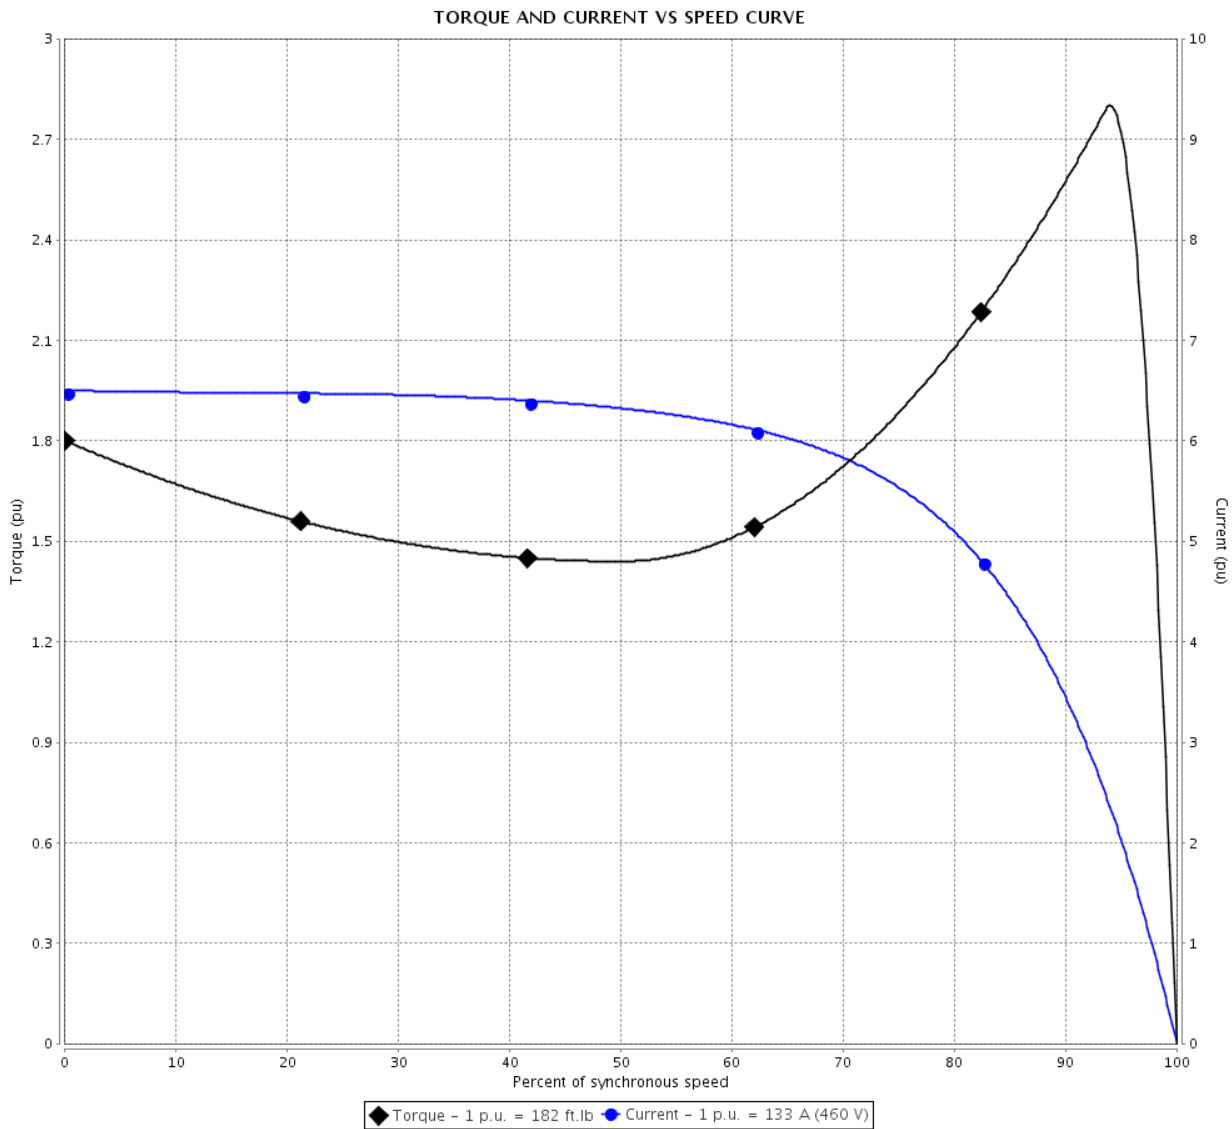

Performance : 208-230/460 V 60 Hz 2P

Rated current	: 301-266/133 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 182 ft.lb	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 3560 rpm	Design	: B

Locked rotor time : 19s (cold) 11s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

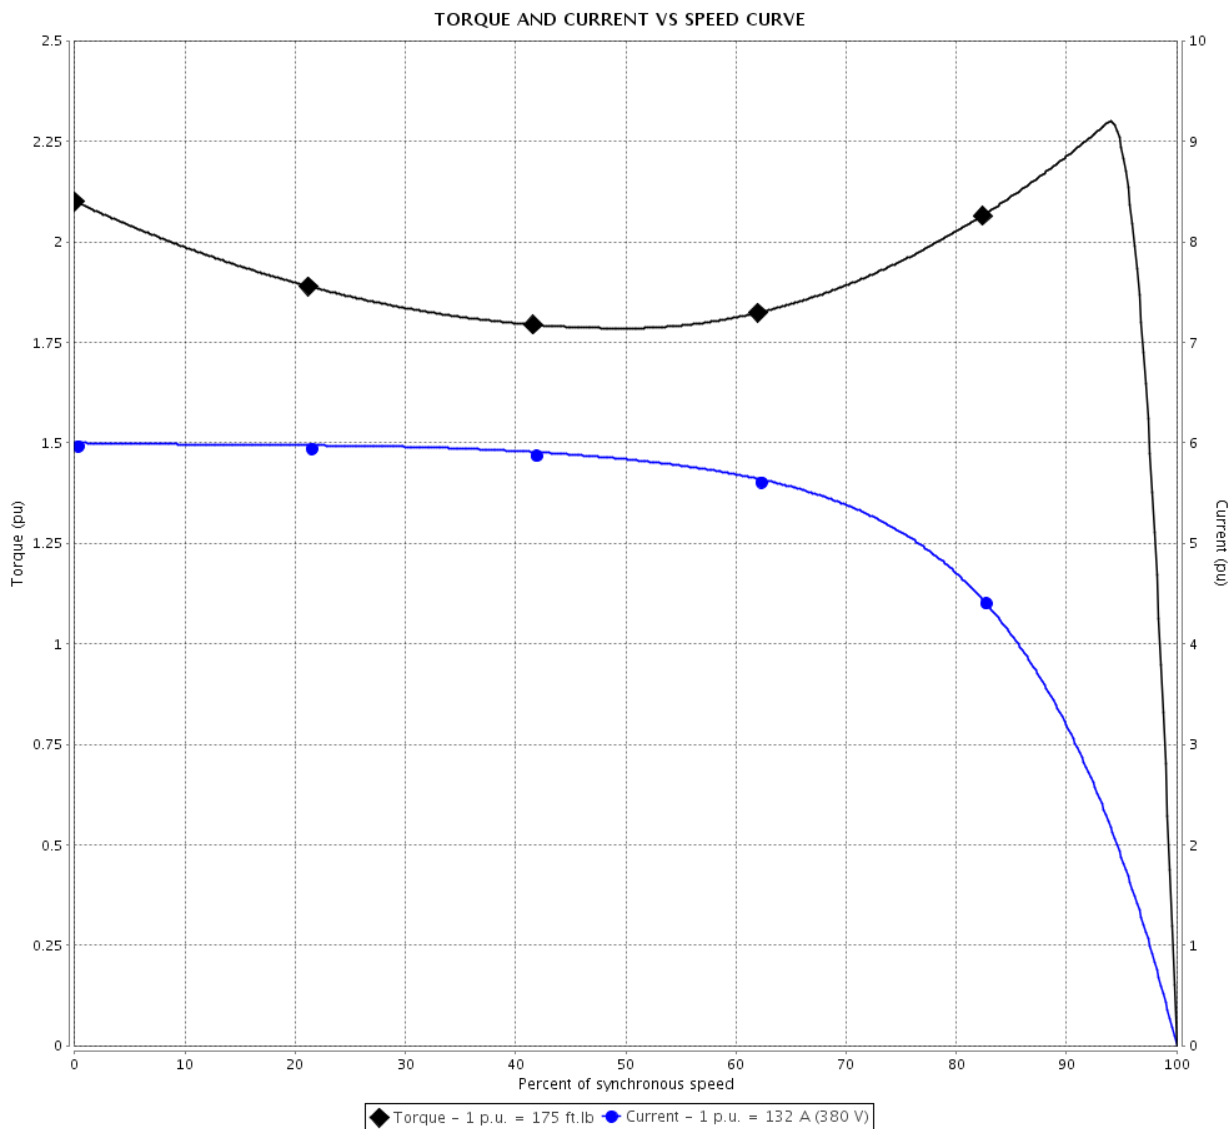

Performance : 380 V 50 Hz 2P IE3

Rated current	: 132 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 6.0	Duty cycle	: Cont.(S1)
Rated torque	: 175 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 2965 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

TORQUE AND CURRENT VS SPEED CURVE

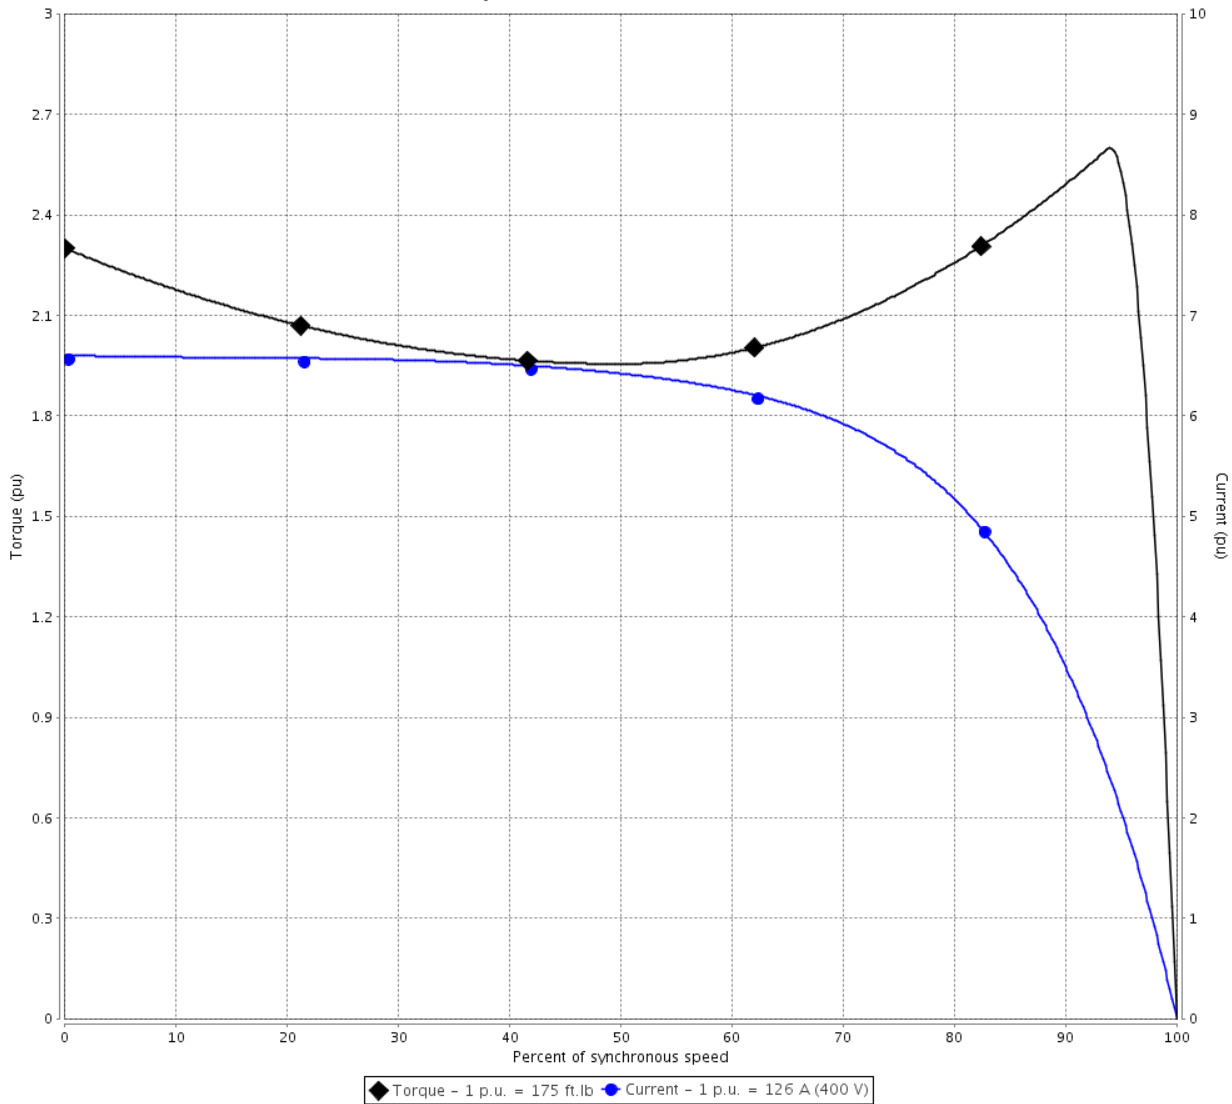

Performance : 400 V 50 Hz 2P IE3

Rated current	: 126 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 6.6	Duty cycle	: Cont.(S1)
Rated torque	: 175 ft.lb	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 2965 rpm	Design	: B

Locked rotor time : 18s (cold) 10s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

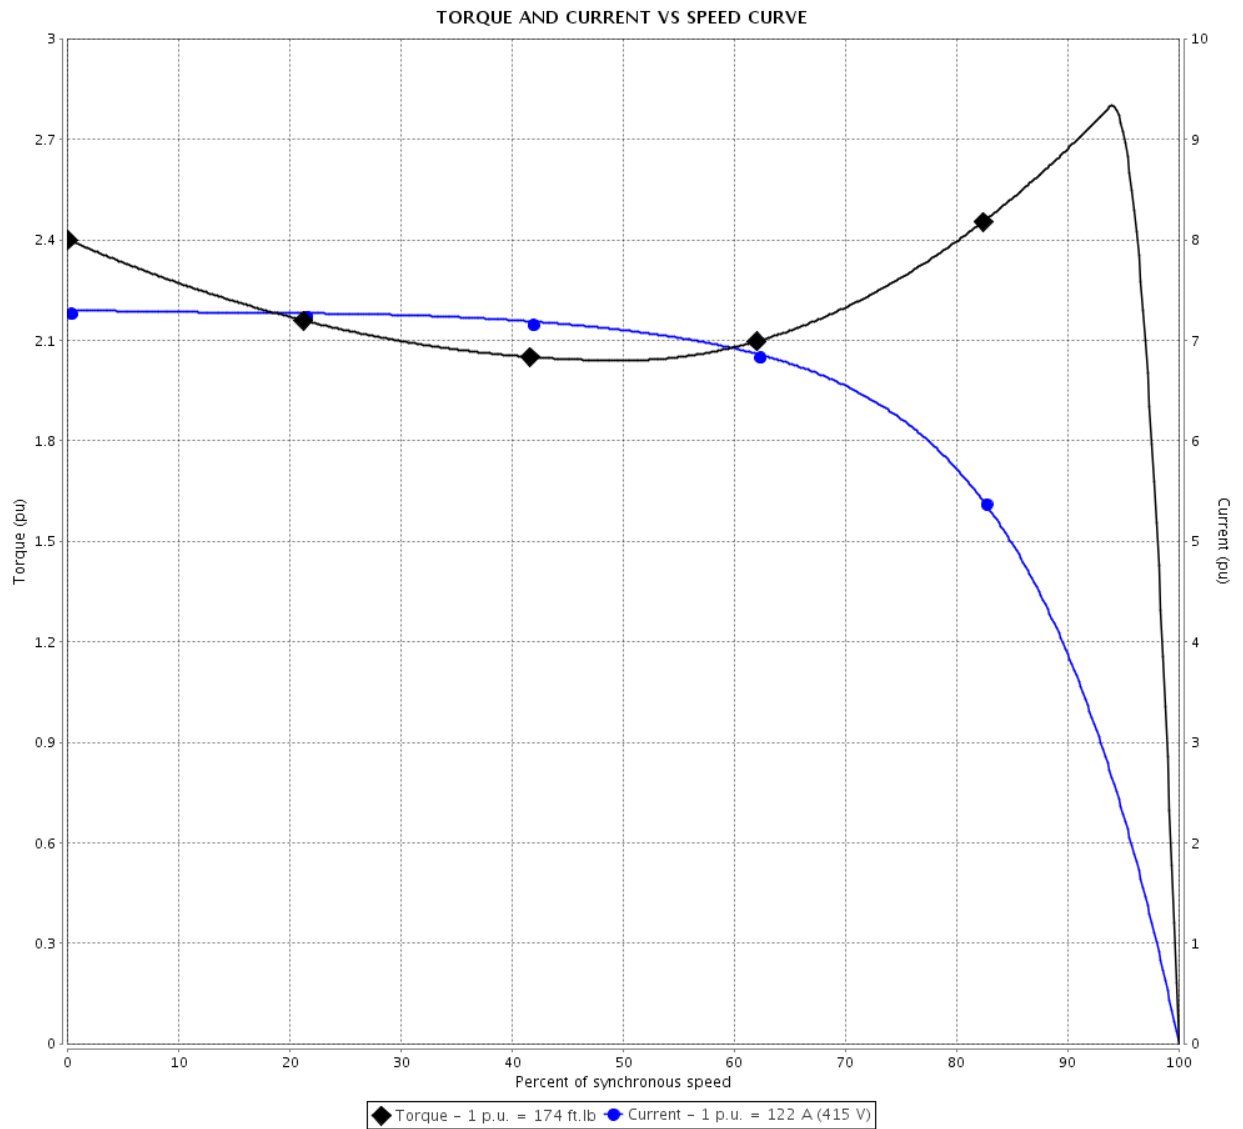

Performance : 415 V 50 Hz 2P IE3

Rated current	: 122 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 174 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 2970 rpm	Design	: B

Locked rotor time : 14s (cold) 8s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

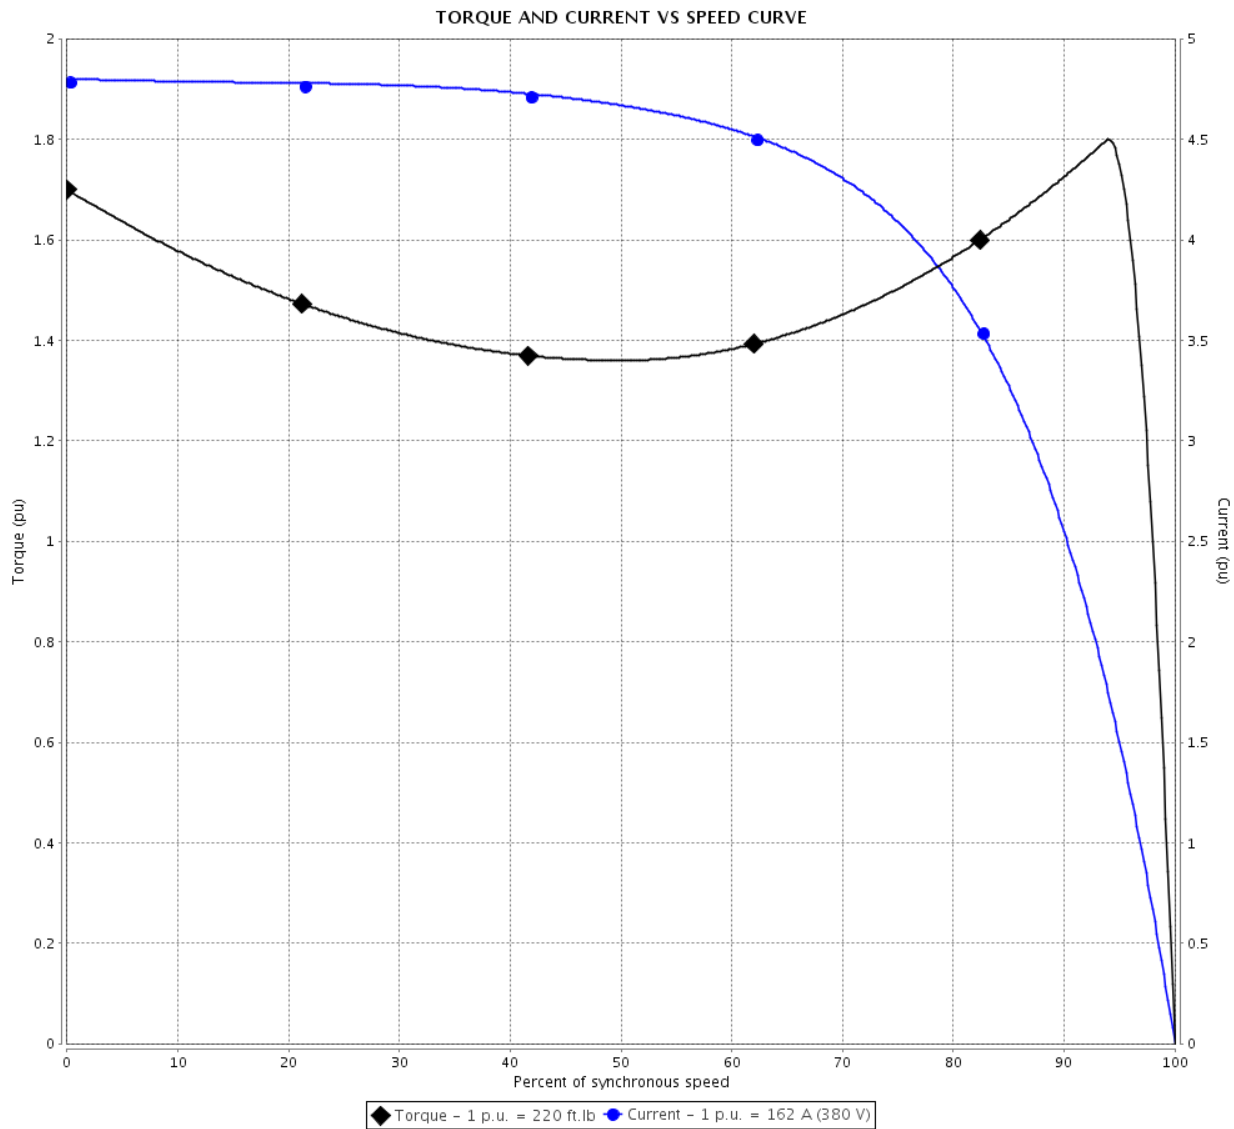

Performance : 380 V 50 Hz 2P IE1

Rated current	: 162 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 4.8	Duty cycle	: Cont.(S1)
Rated torque	: 220 ft.lb	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.15
Breakdown torque	: 180 %	Temperature rise	: 80 K
Rated speed	: 2950 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

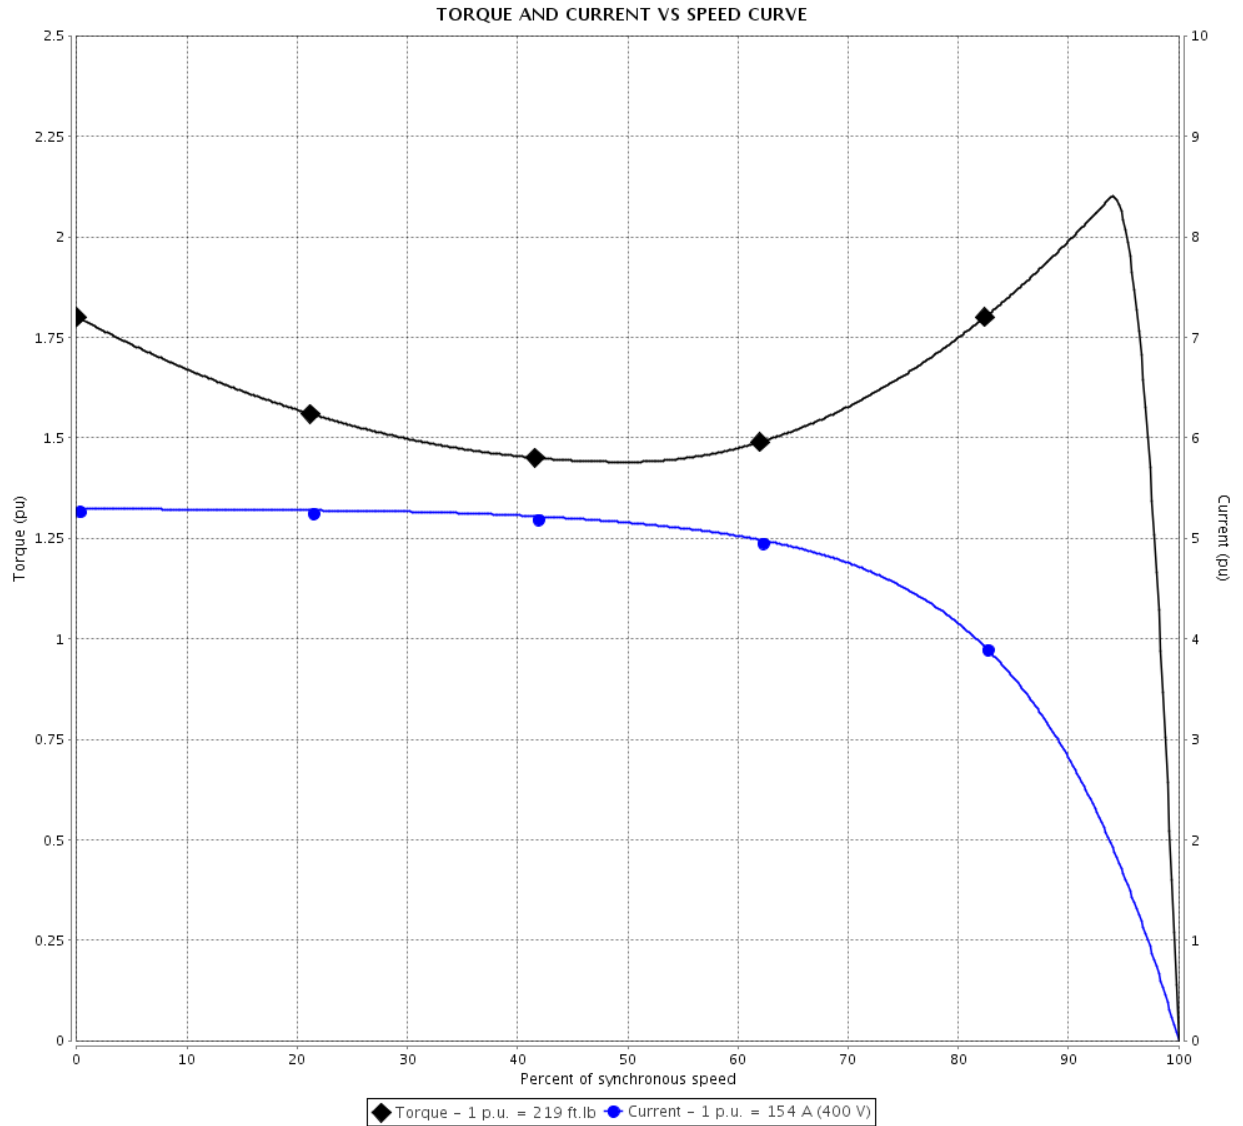

Performance : 400 V 50 Hz 2P

Rated current	: 154 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 5.3	Duty cycle	: Cont.(S1)
Rated torque	: 219 ft.lb	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.15
Breakdown torque	: 210 %	Temperature rise	: 80 K
Rated speed	: 2955 rpm	Design	: B

Locked rotor time : 18s (cold) 10s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 7 / 36	Revision
Checked by				
Date	06/11/2019			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

TORQUE AND CURRENT VS SPEED CURVE

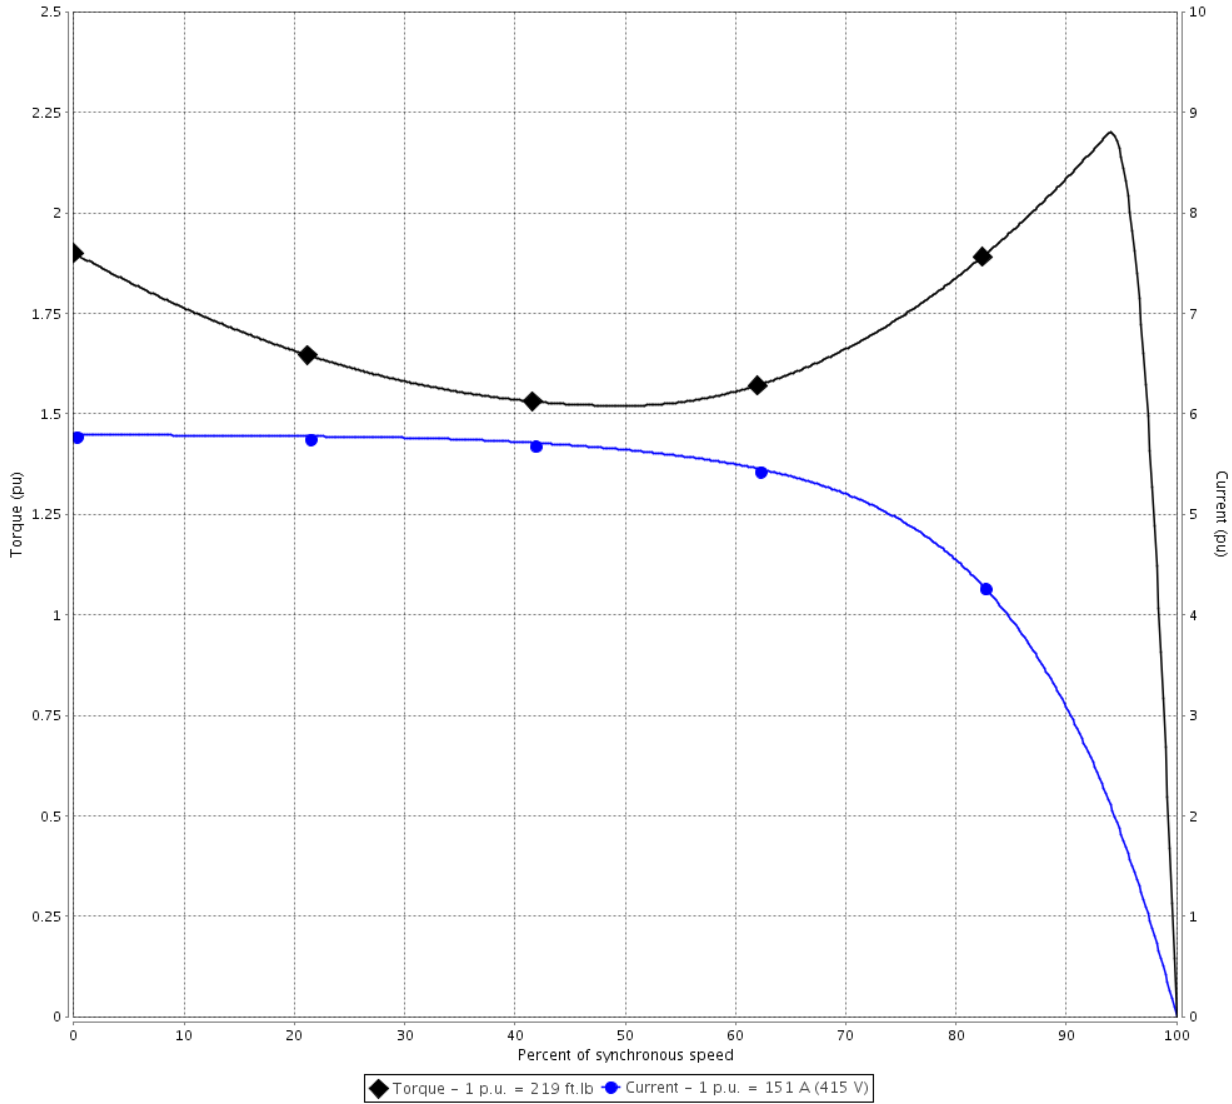

Performance : 415 V 50 Hz 2P

Rated current	: 151 A	Moment of inertia (J)	: 10.2 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 219 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 2960 rpm	Design	: B

Locked rotor time : 14s (cold) 8s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 36	Revision
Checked by				
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 1055137

Catalog # : 12536OT3E404TS

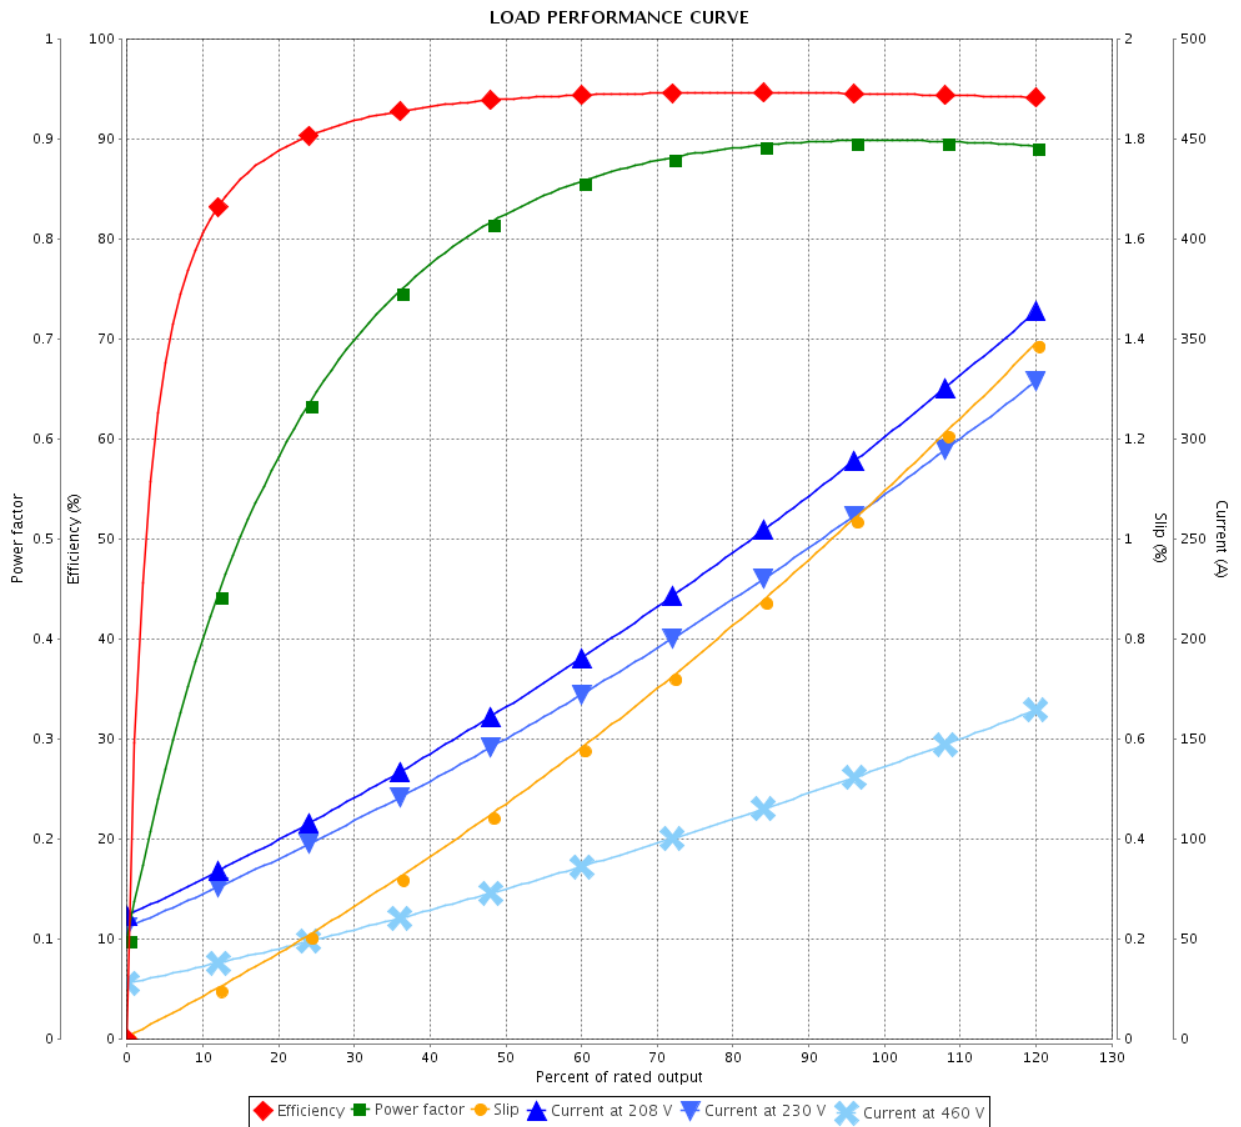

Performance : 208-230/460 V 60 Hz 2P

Rated current : 301-266/133 A  
 LRC : 6.5  
 Rated torque : 182 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 280 %  
 Rated speed : 3560 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 36		
Date		06/11/2019		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

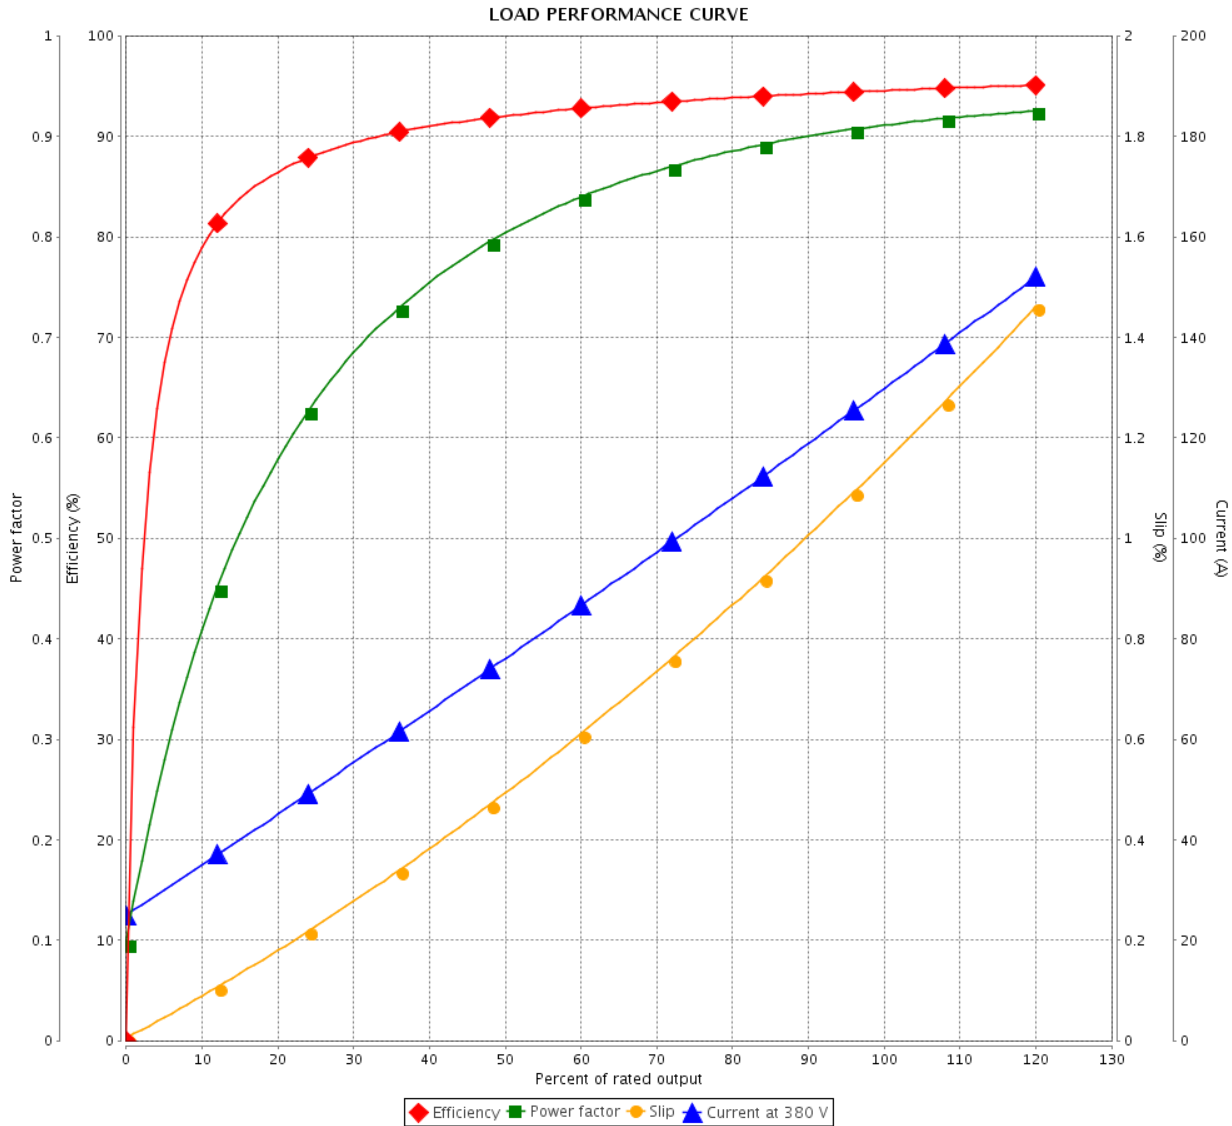

Performance : 380 V 50 Hz 2P IE3

Rated current : 132 A  
 LRC : 6.0  
 Rated torque : 175 ft.lb  
 Locked rotor torque : 210 %  
 Breakdown torque : 229 %  
 Rated speed : 2965 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 10 / 36	Revision
Checked by				
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

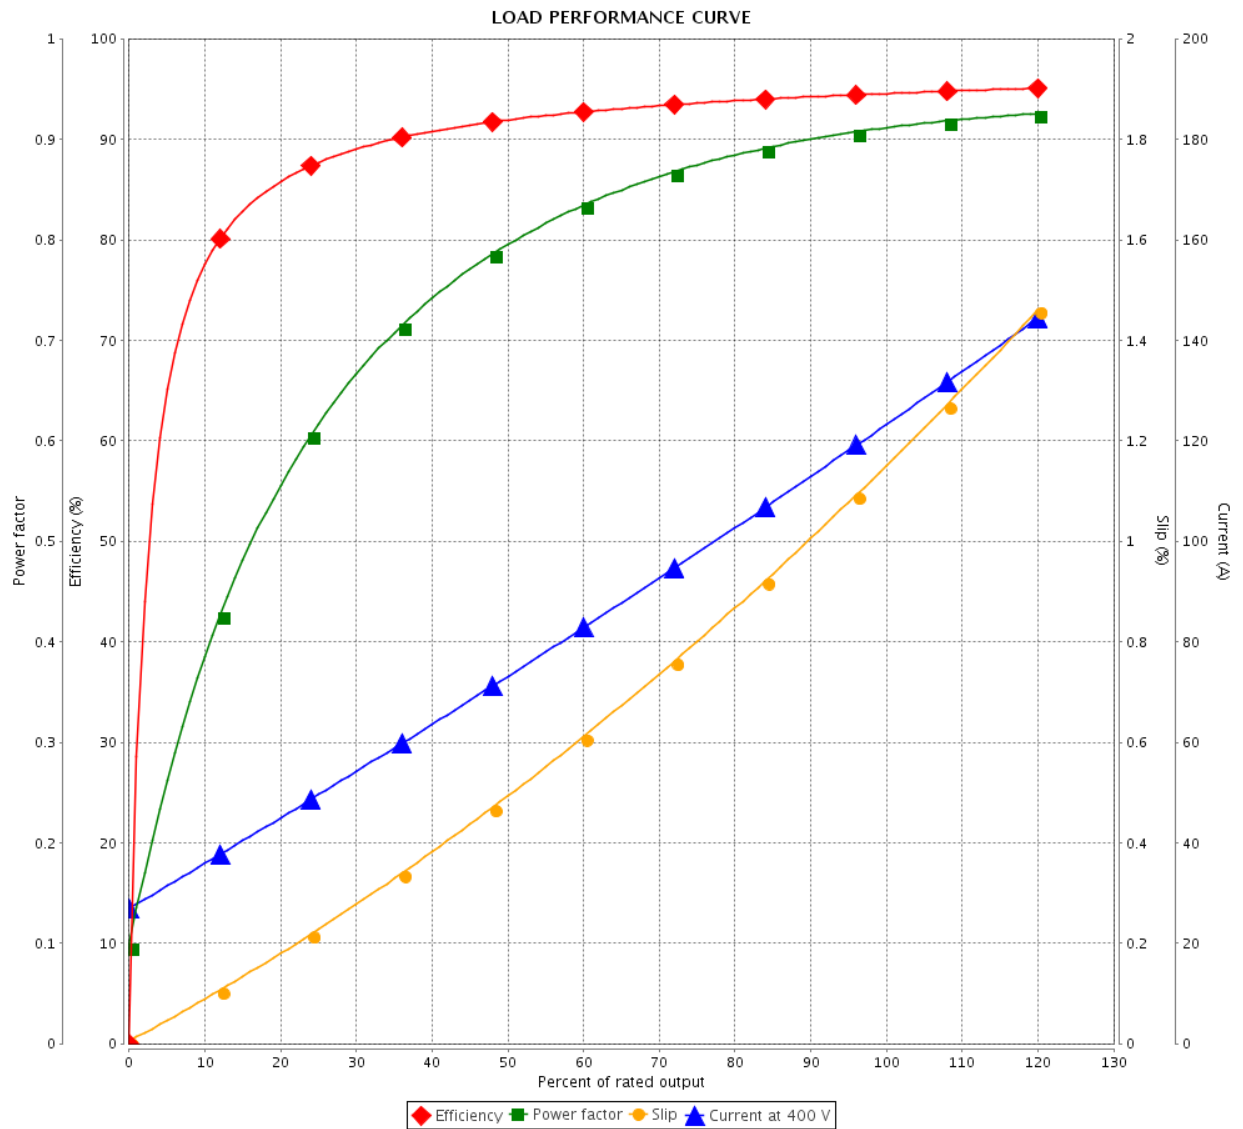

Performance : 400 V 50 Hz 2P IE3

Rated current : 126 A  
 LRC : 6.6  
 Rated torque : 175 ft.lb  
 Locked rotor torque : 229 %  
 Breakdown torque : 260 %  
 Rated speed : 2965 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			11 / 36	
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

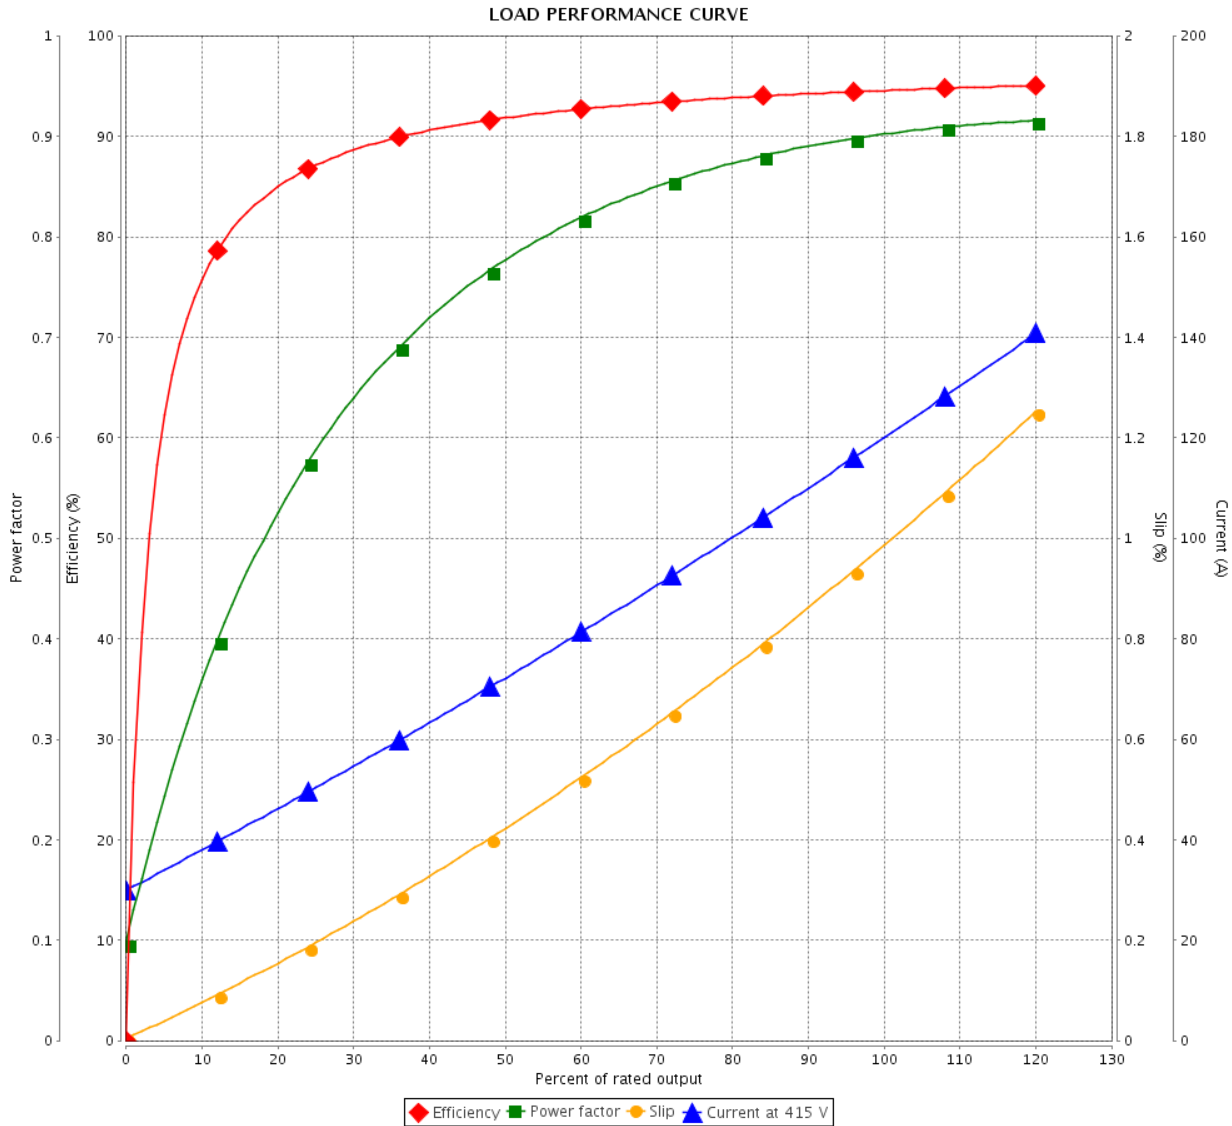

Performance : 415 V 50 Hz 2P IE3

Rated current : 122 A  
 LRC : 7.3  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 240 %  
 Breakdown torque : 280 %  
 Rated speed : 2970 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 12 / 36	Revision
Checked by				
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

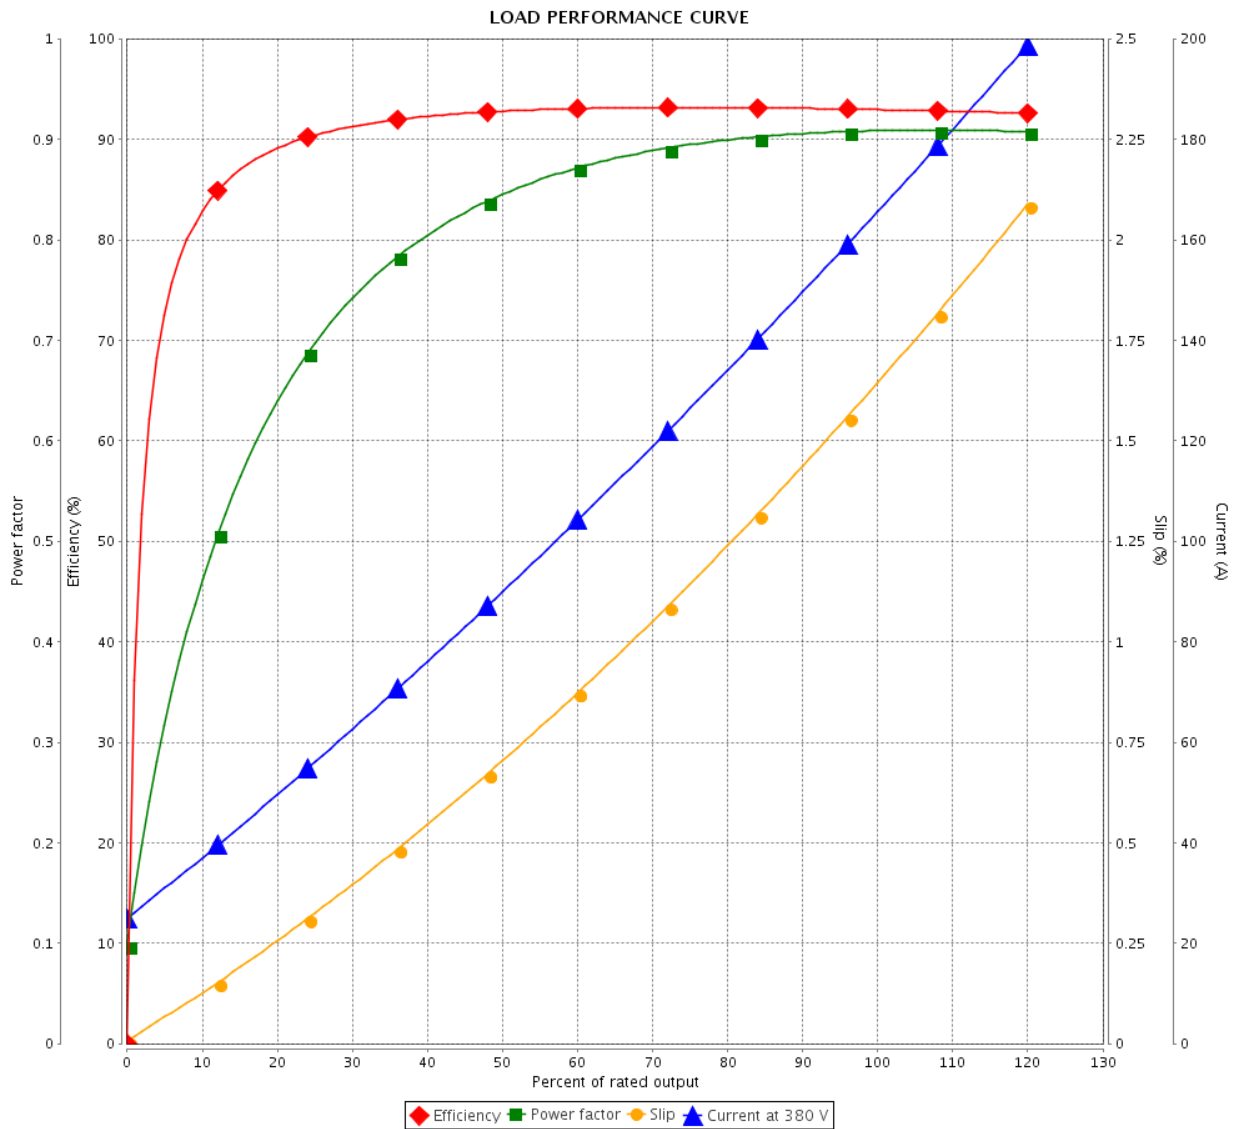

Performance : 380 V 50 Hz 2P IE1

Rated current : 162 A  
 LRC : 4.8  
 Rated torque : 220 ft.lb  
 Locked rotor torque : 170 %  
 Breakdown torque : 180 %  
 Rated speed : 2950 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			13 / 36	
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

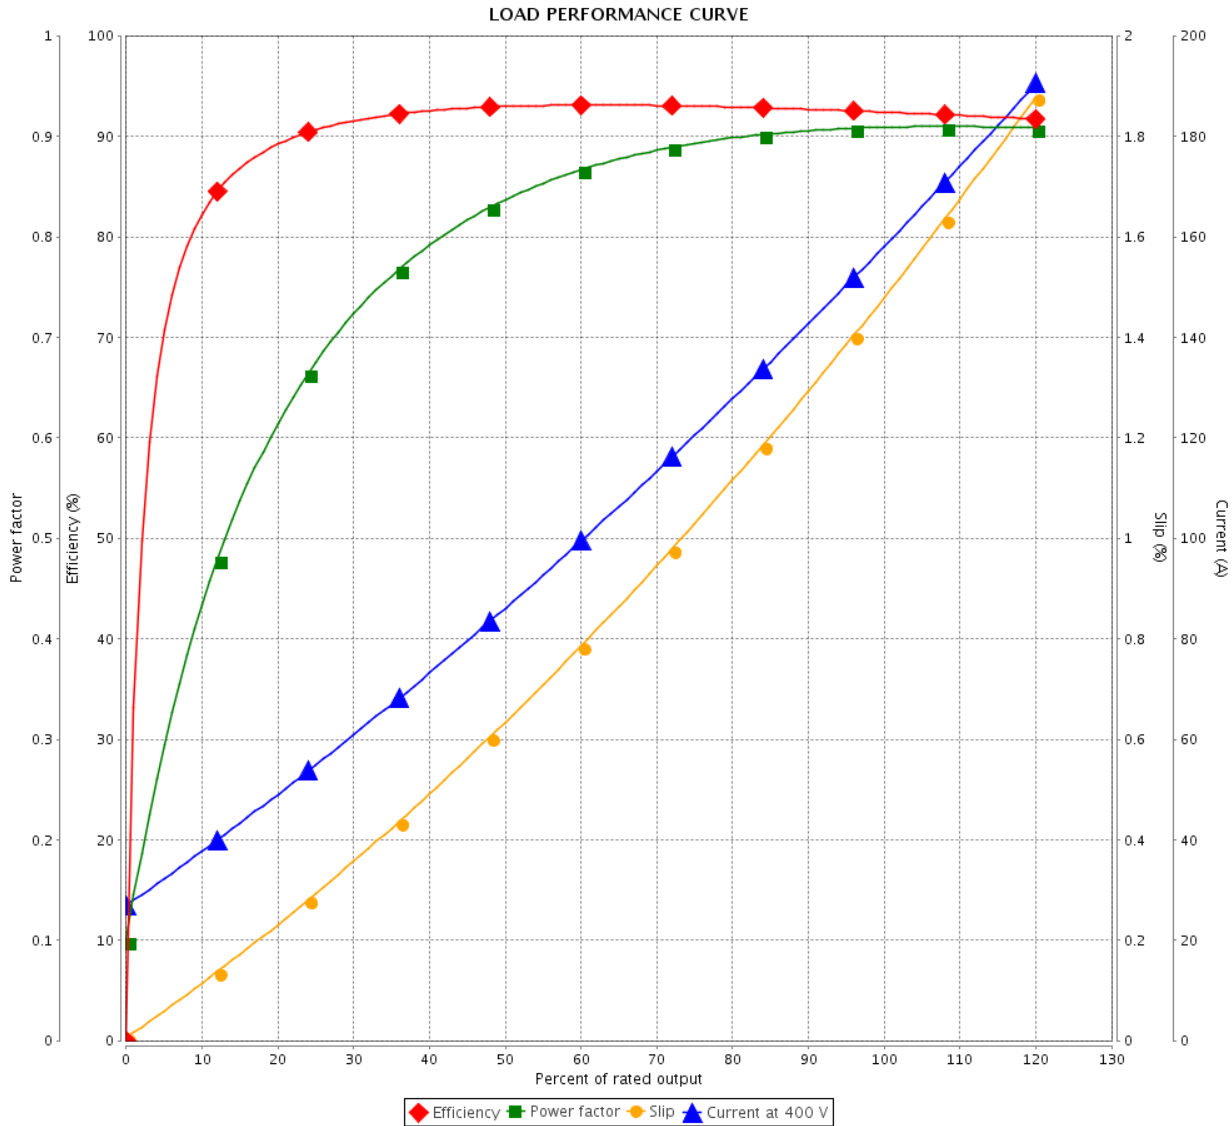

Performance : 400 V 50 Hz 2P

Rated current : 154 A	Moment of inertia (J) : 10.2 sq.ft.lb
LRC : 5.3	Duty cycle : Cont.(S1)
Rated torque : 219 ft.lb	Insulation class : F
Locked rotor torque : 180 %	Service factor : 1.15
Breakdown torque : 210 %	Temperature rise : 80 K
Rated speed : 2955 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 14 / 36	Revision
Checked by				
Date	06/11/2019			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

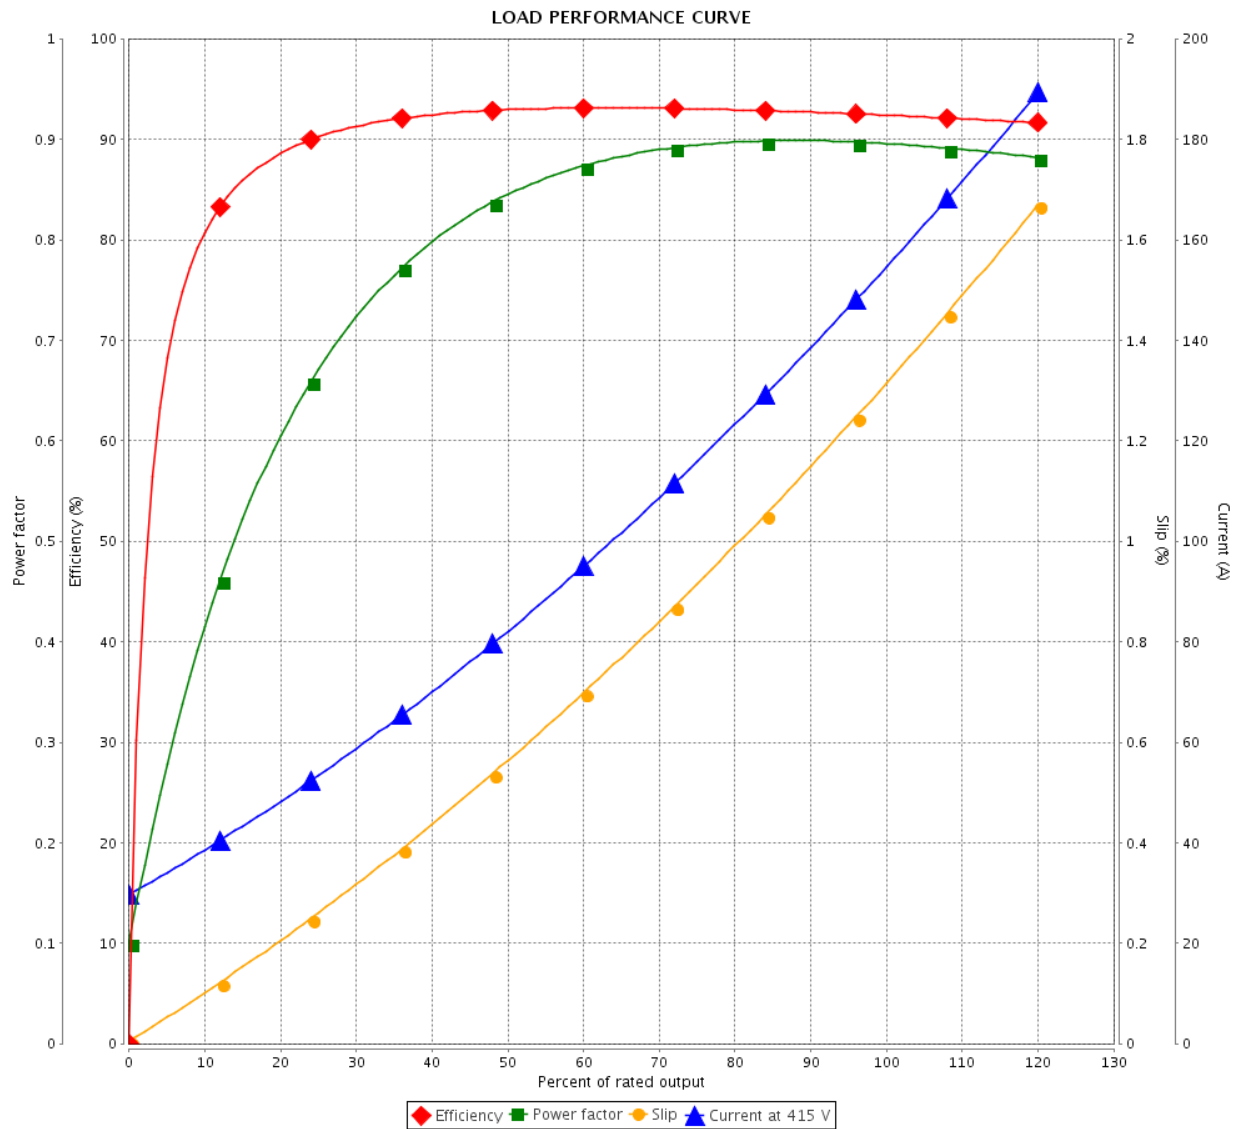

Performance : 415 V 50 Hz 2P

Rated current : 151 A  
 LRC : 5.8  
 Rated torque : 219 ft.lb  
 Locked rotor torque : 190 %  
 Breakdown torque : 220 %  
 Rated speed : 2960 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 36		
Date	06/11/2019			

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

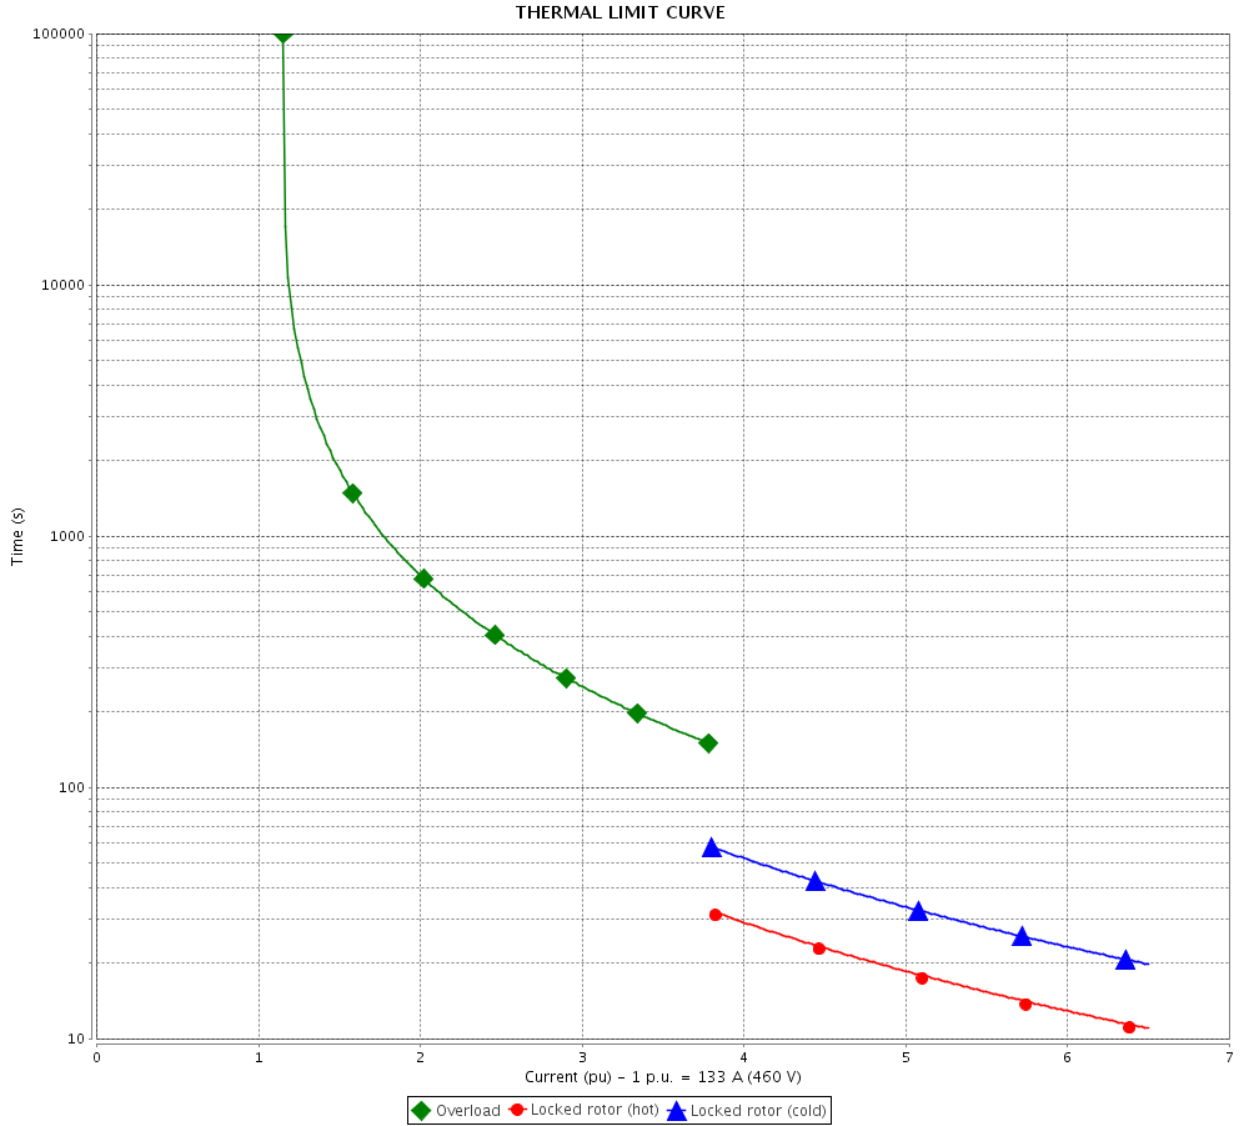


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 17 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

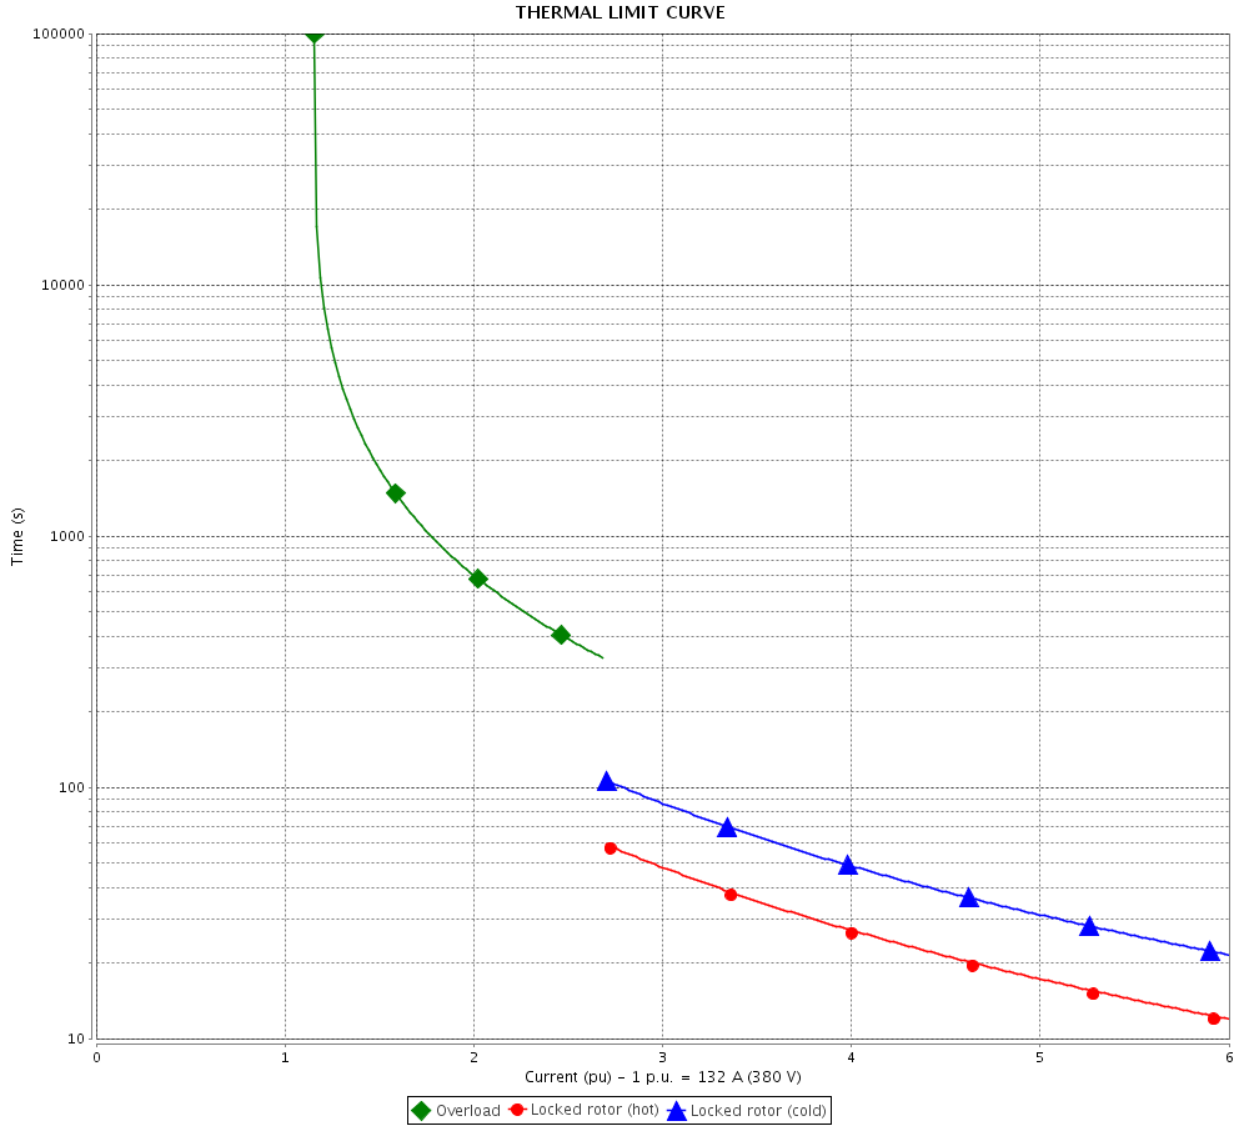


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 19 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

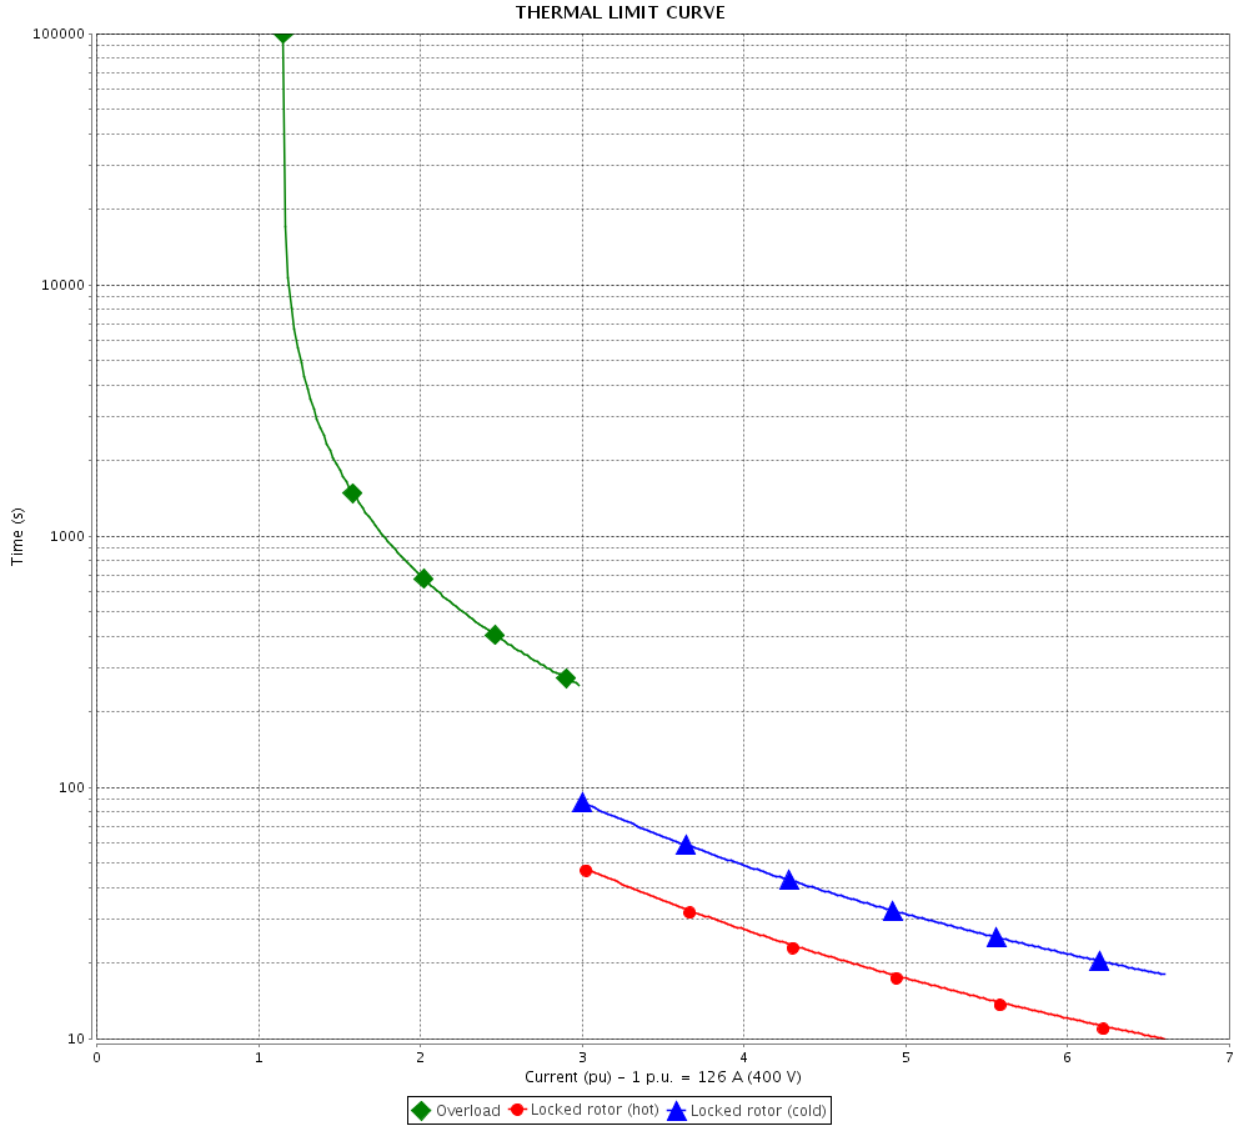


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		21 / 36		
Date	06/11/2019			

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

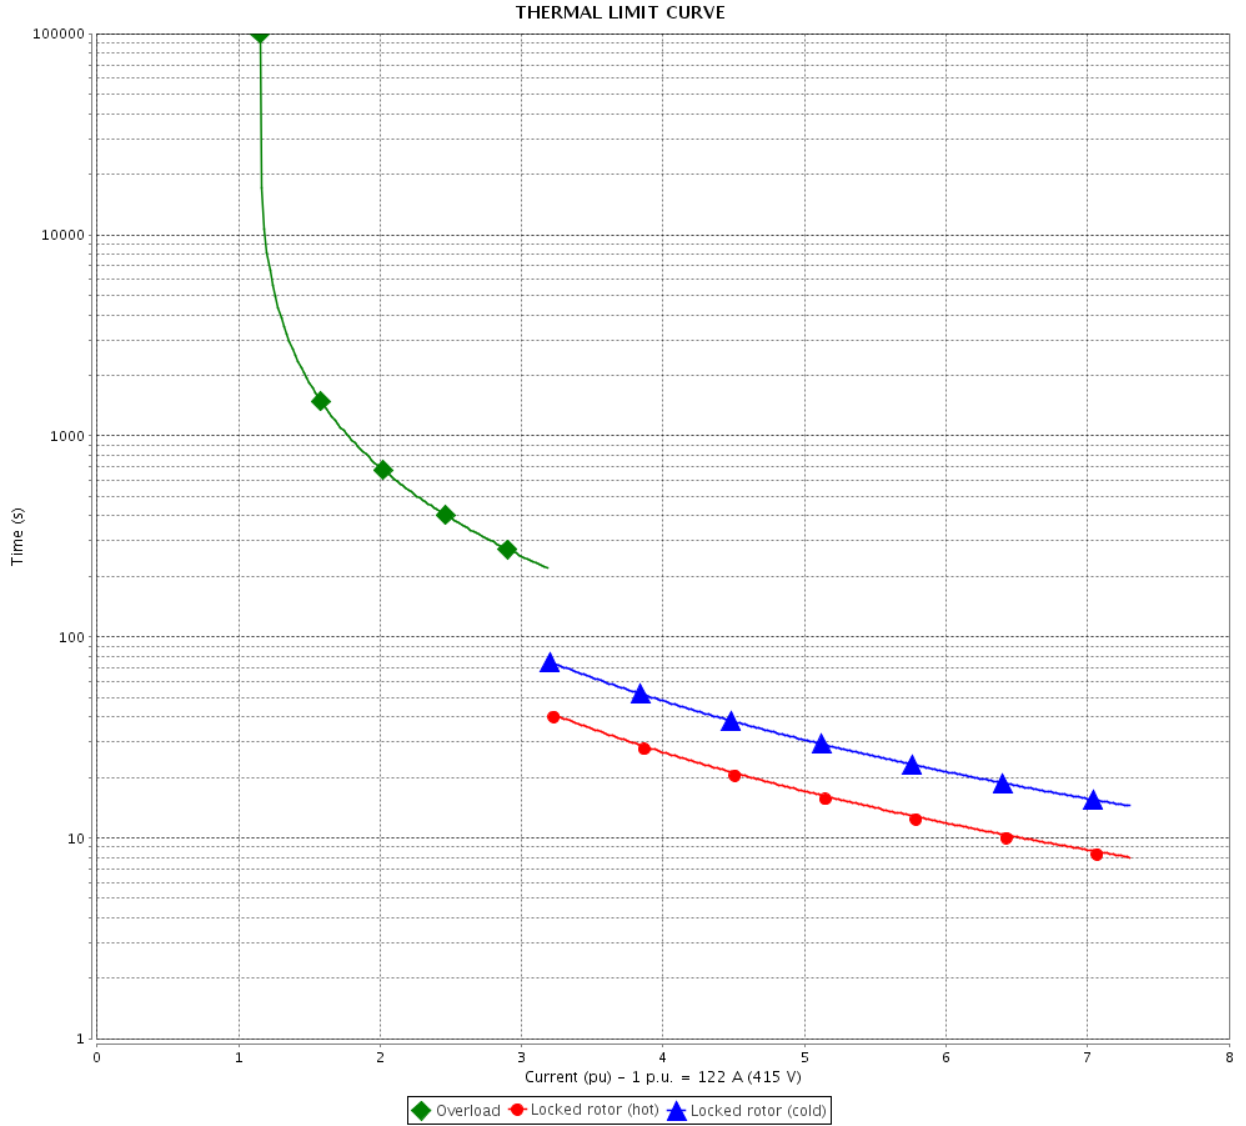


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			23 / 36	

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

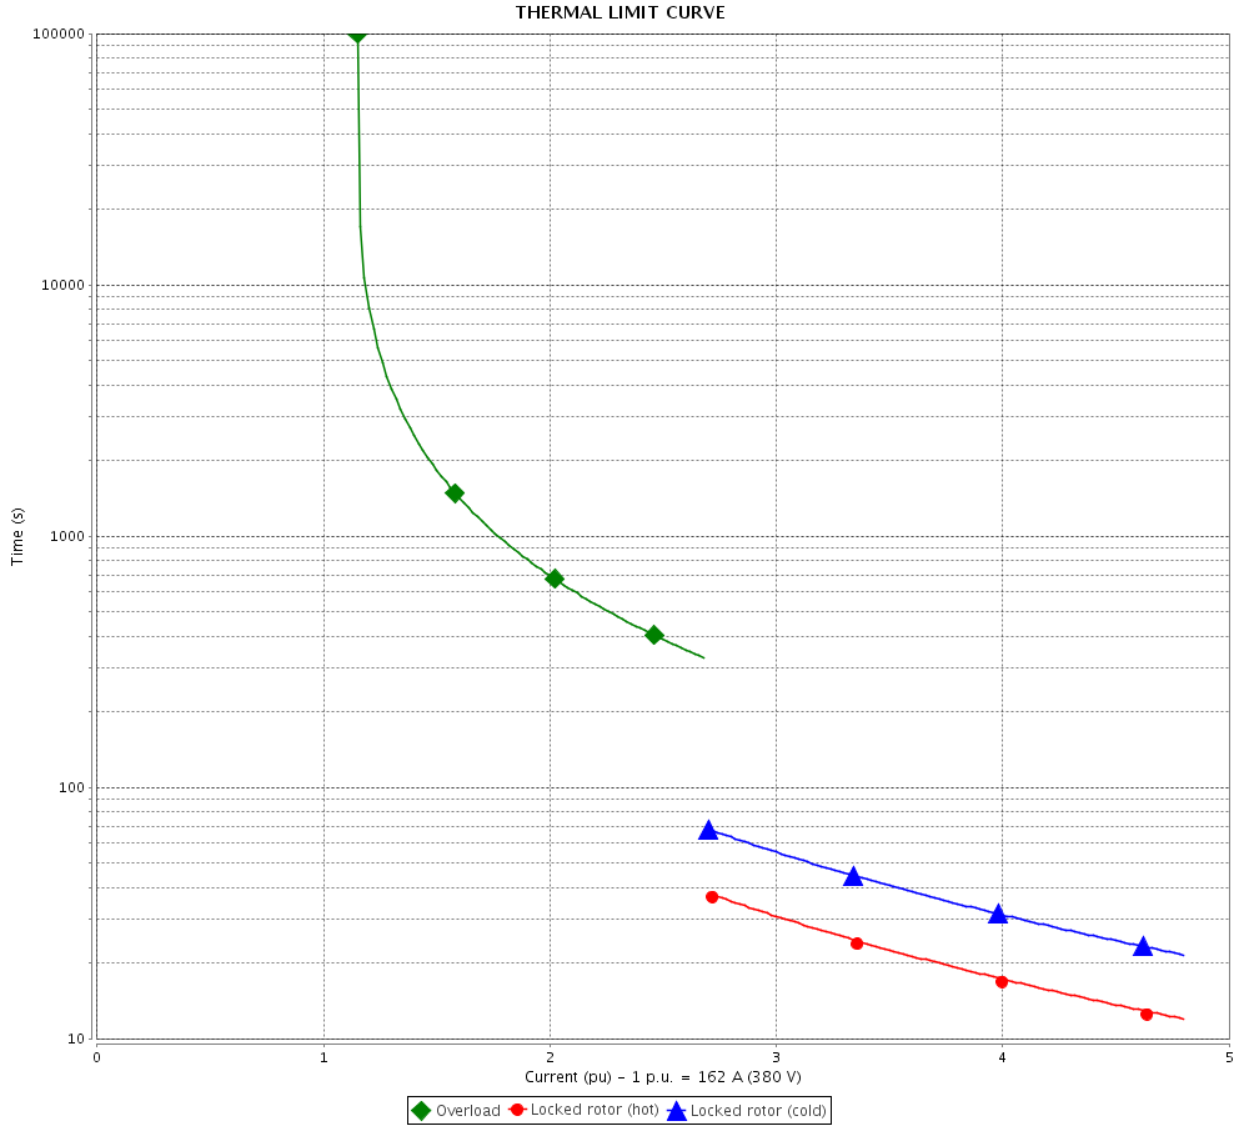


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		25 / 36		
Date		06/11/2019		

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

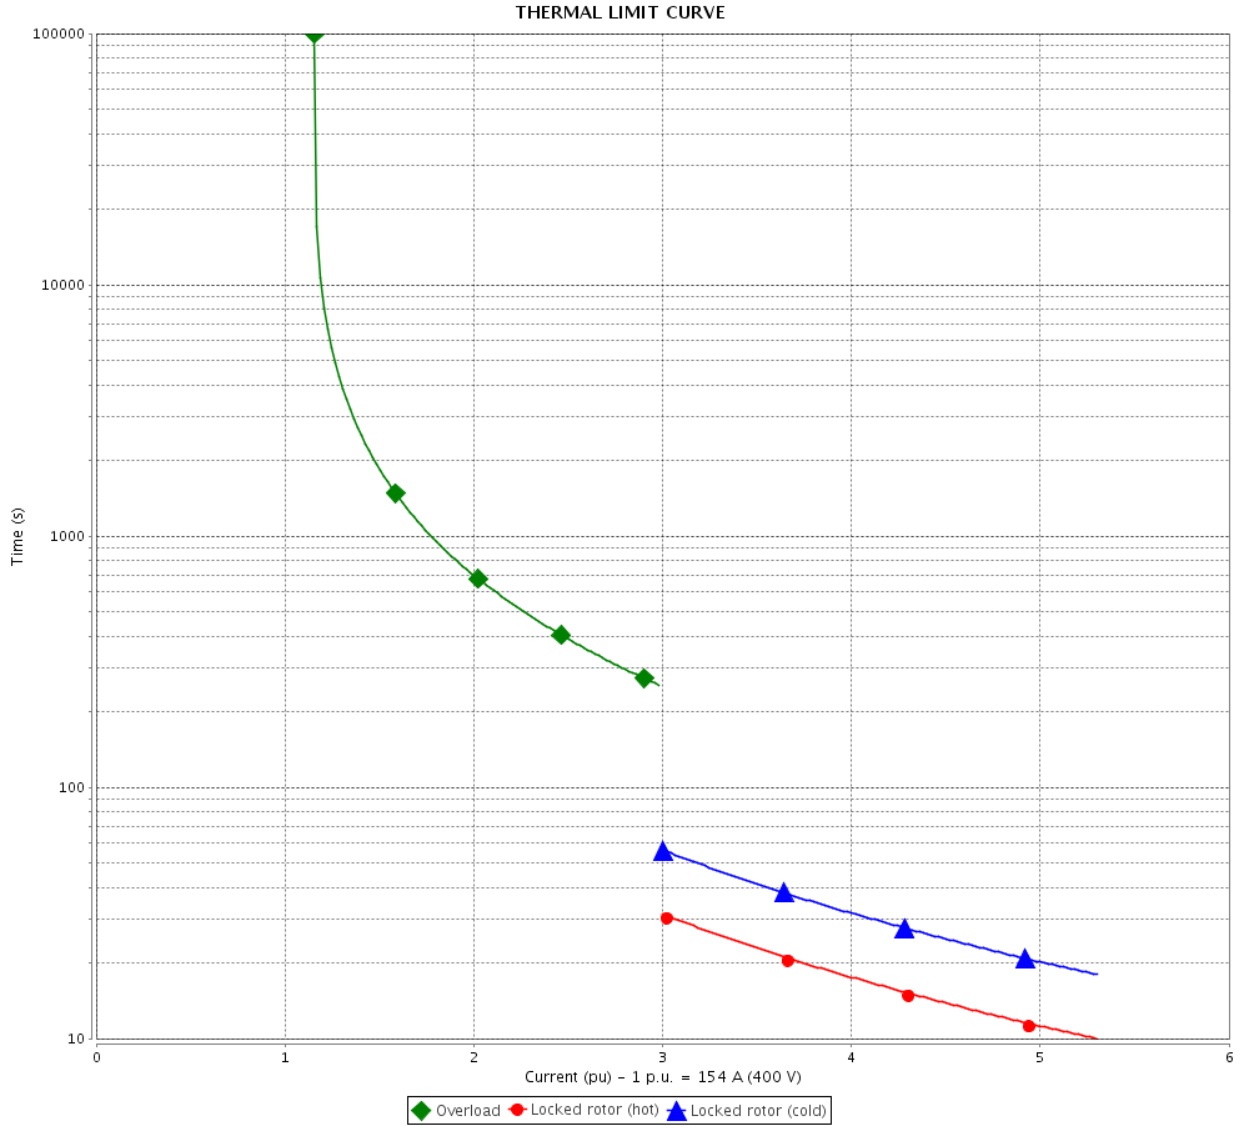


Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 27 / 36		Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

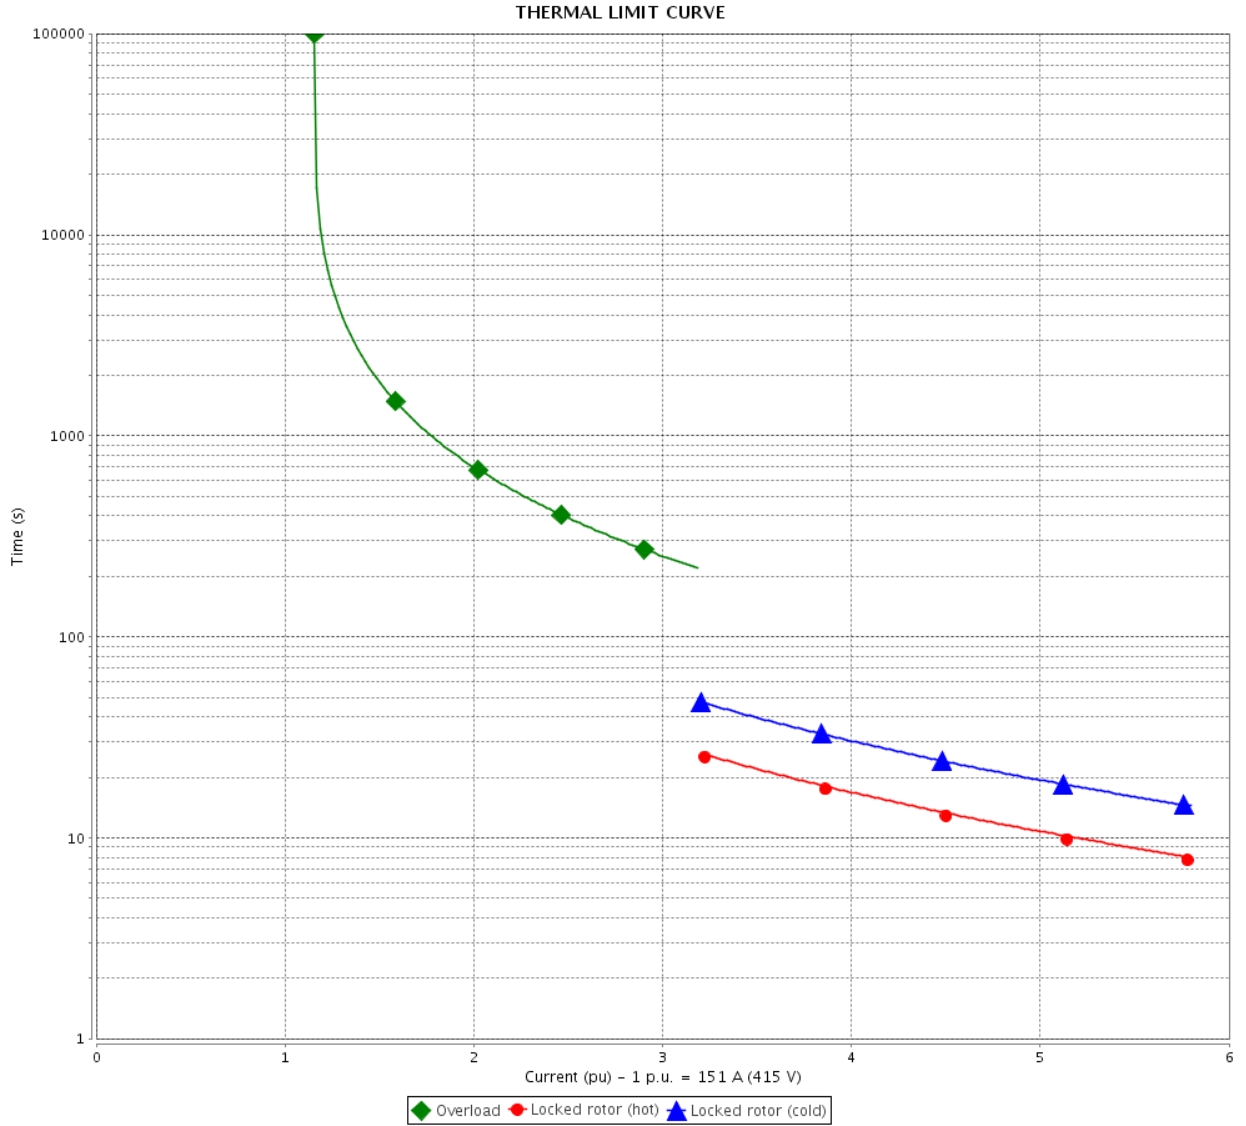

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			29 / 36	

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

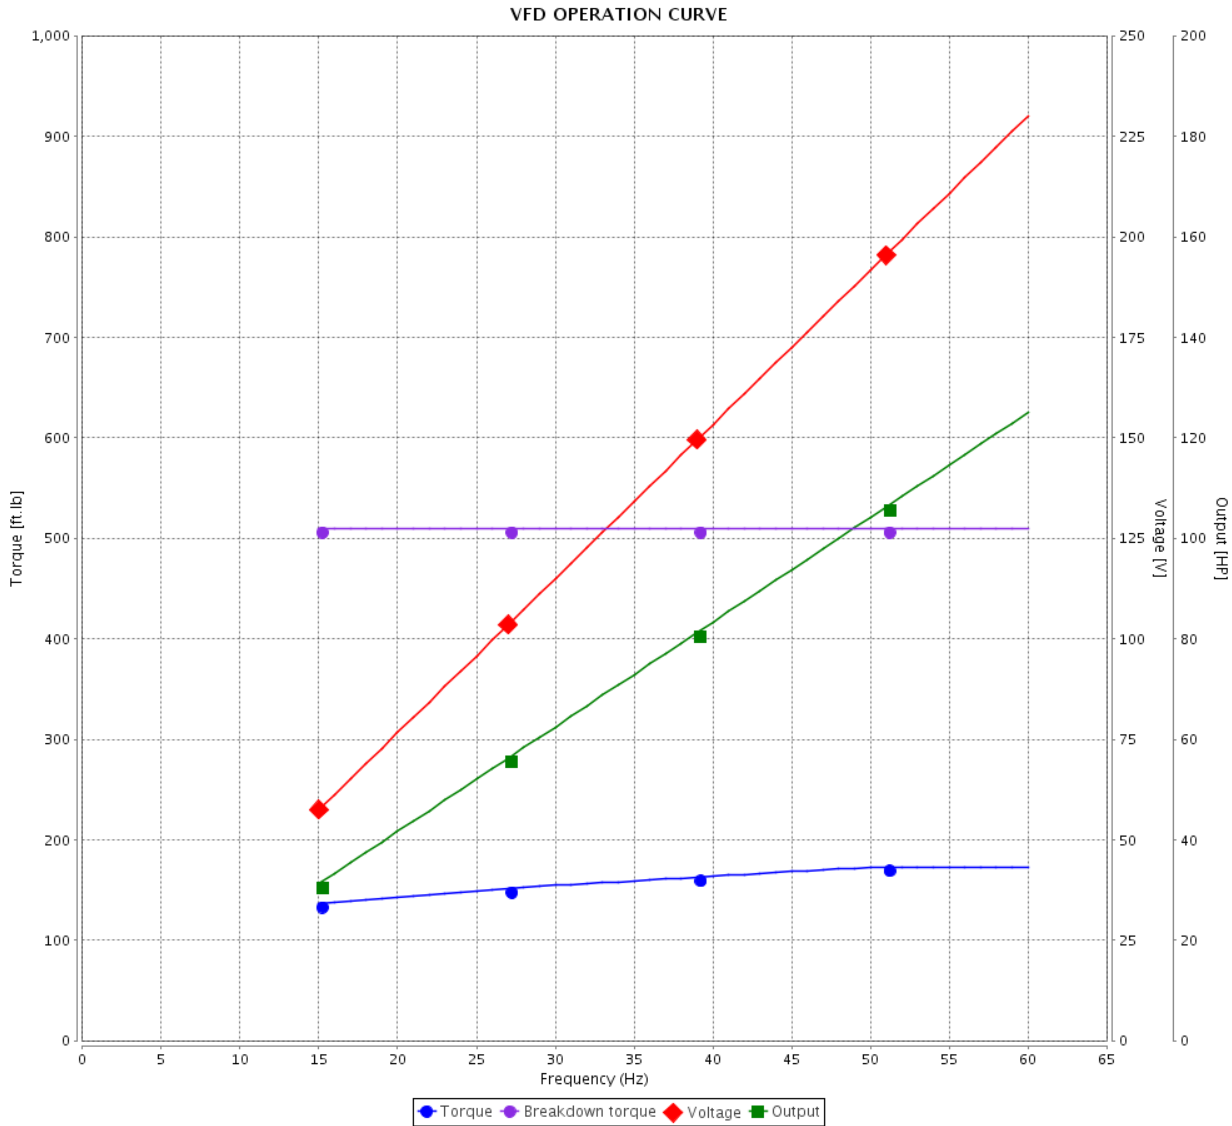

Performance : 208-230/460 V 60 Hz 2P

Rated current : 301-266/133 A  
 LRC : 6.5  
 Rated torque : 182 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 280 %  
 Rated speed : 3560 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 30 / 36	Revision
Checked by				
Date	06/11/2019			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

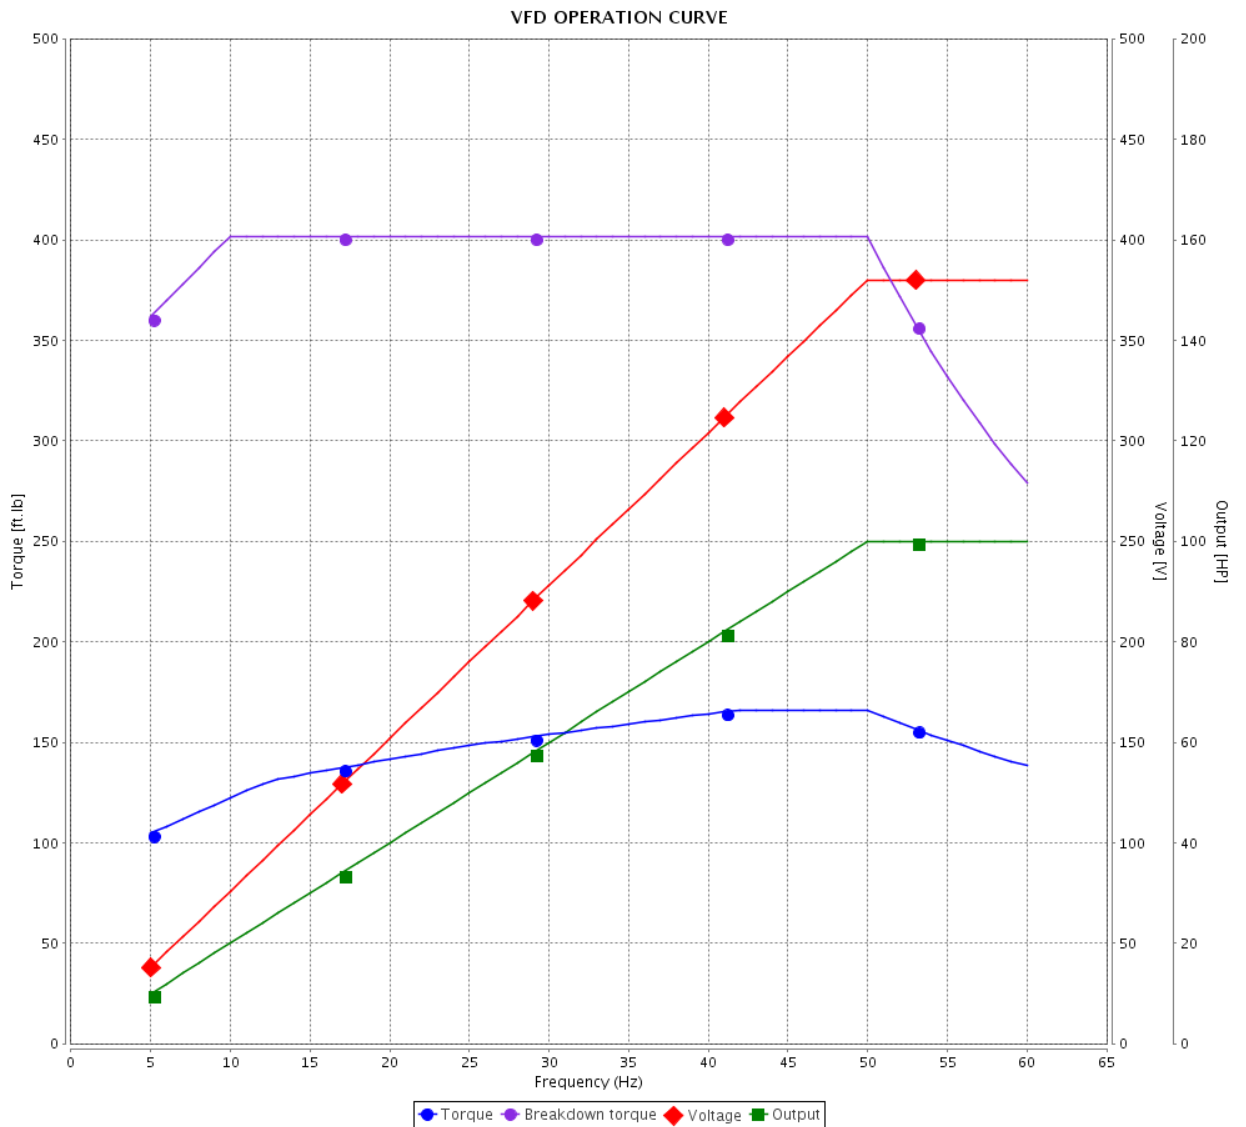

Performance : 380 V 50 Hz 2P IE3

Rated current : 132 A  
LRC : 6.0  
Rated torque : 175 ft.lb  
Locked rotor torque : 210 %  
Breakdown torque : 229 %  
Rated speed : 2965 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		31 / 36		
Date		06/11/2019		

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

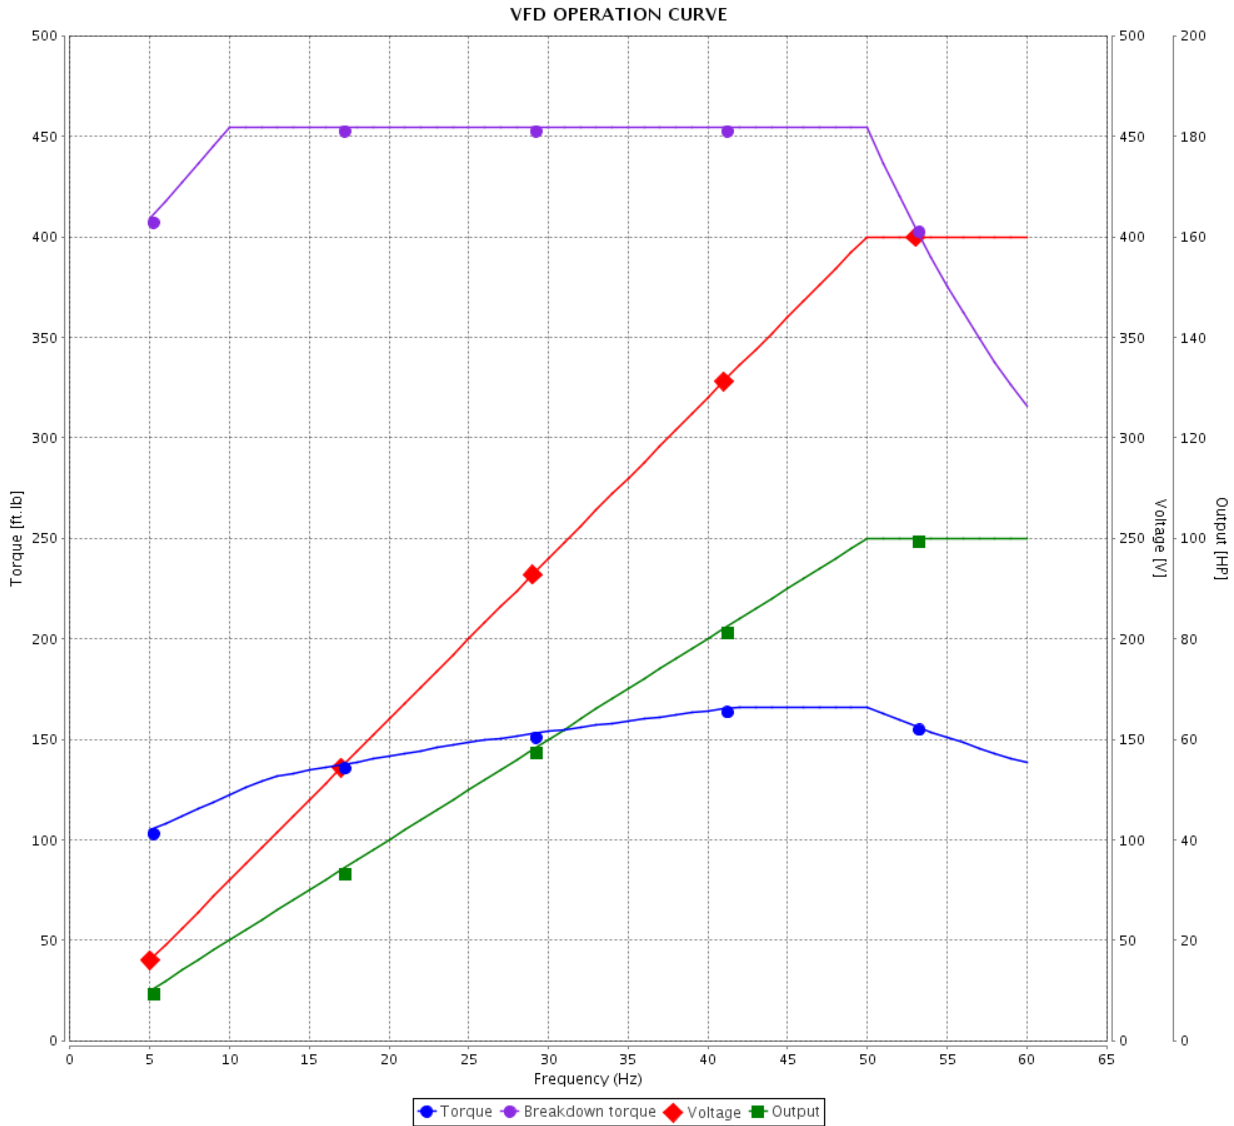

Performance : 400 V 50 Hz 2P IE3

Rated current : 126 A  
LRC : 6.6  
Rated torque : 175 ft.lb  
Locked rotor torque : 229 %  
Breakdown torque : 260 %  
Rated speed : 2965 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

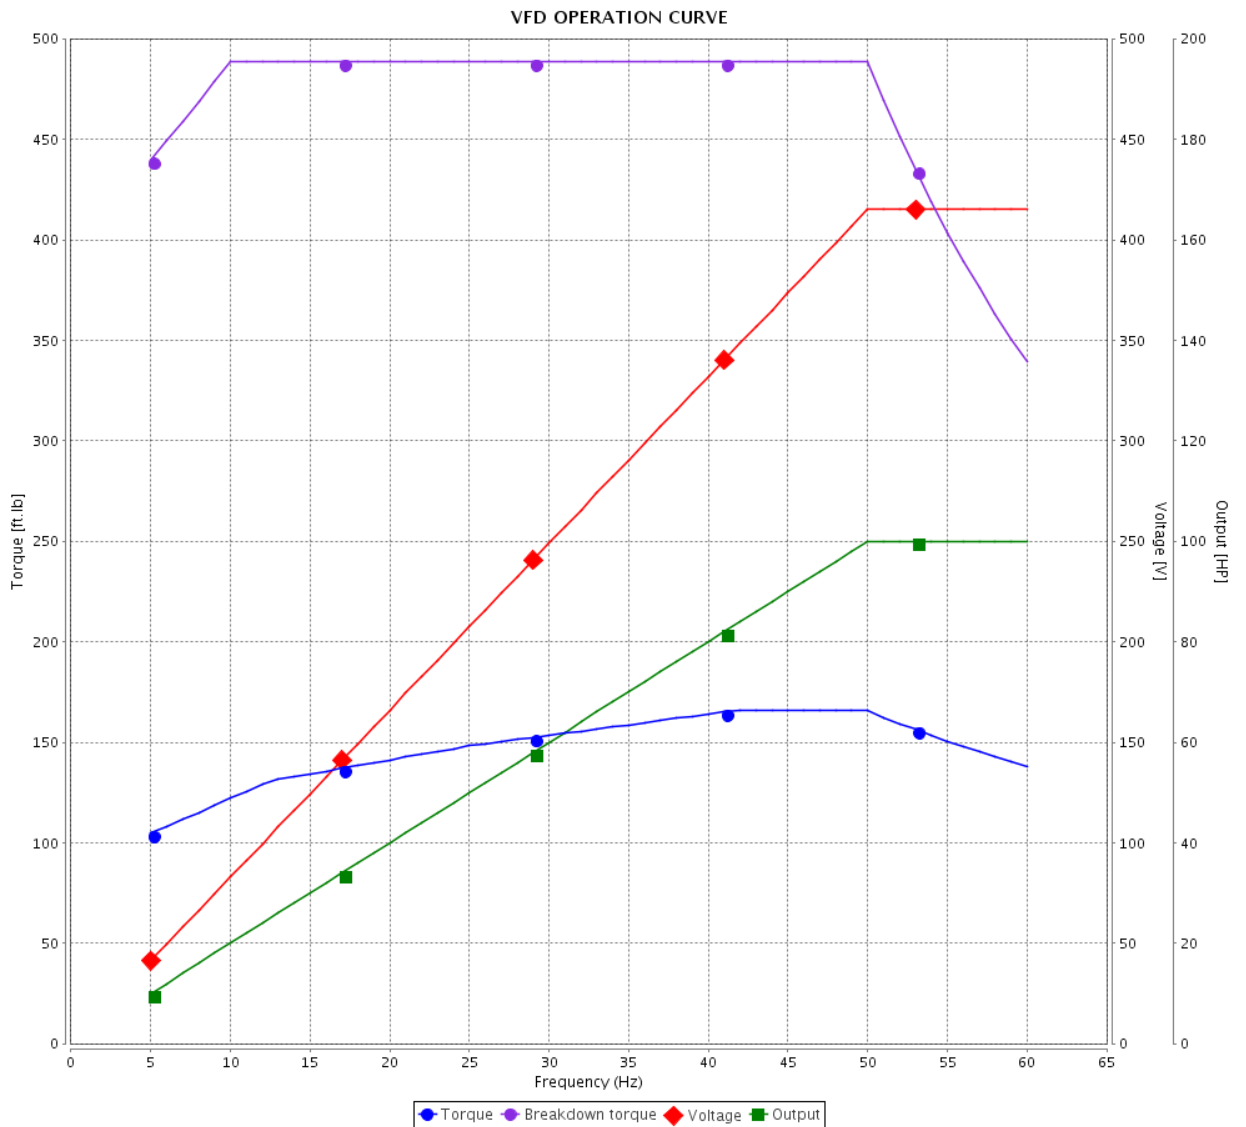

Performance : 415 V 50 Hz 2P IE3


Rated current : 122 A  
 LRC : 7.3  
 Rated torque : 174 ft.lb  
 Locked rotor torque : 240 %  
 Breakdown torque : 280 %  
 Rated speed : 2970 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		33 / 36		
Date		06/11/2019		

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

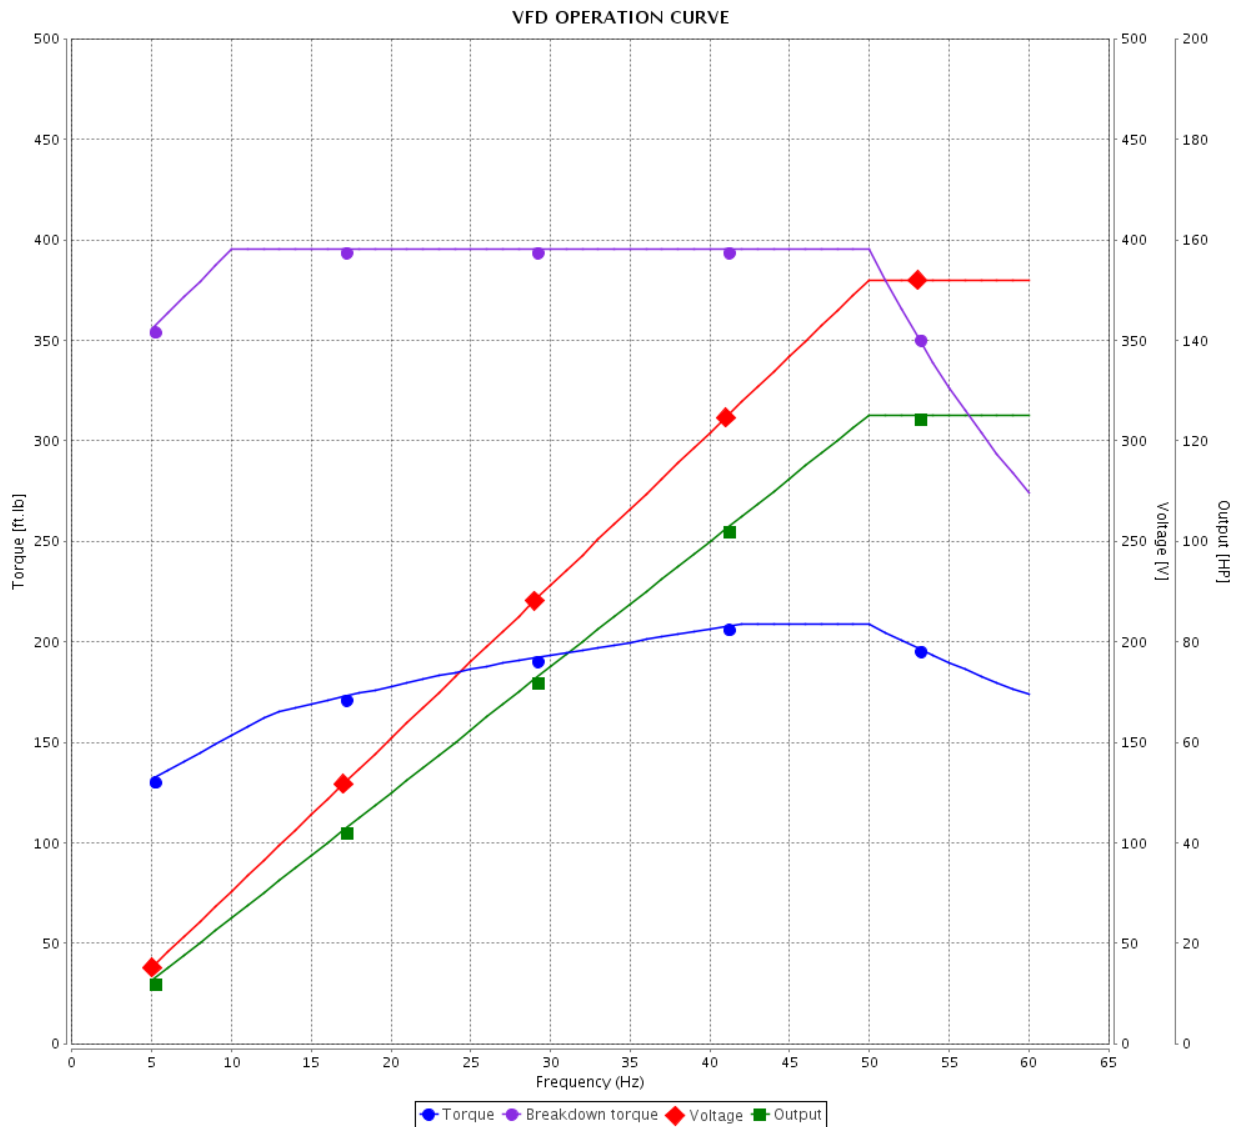

Performance : 380 V 50 Hz 2P IE1

Rated current : 162 A  
LRC : 4.8  
Rated torque : 220 ft.lb  
Locked rotor torque : 170 %  
Breakdown torque : 180 %  
Rated speed : 2950 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

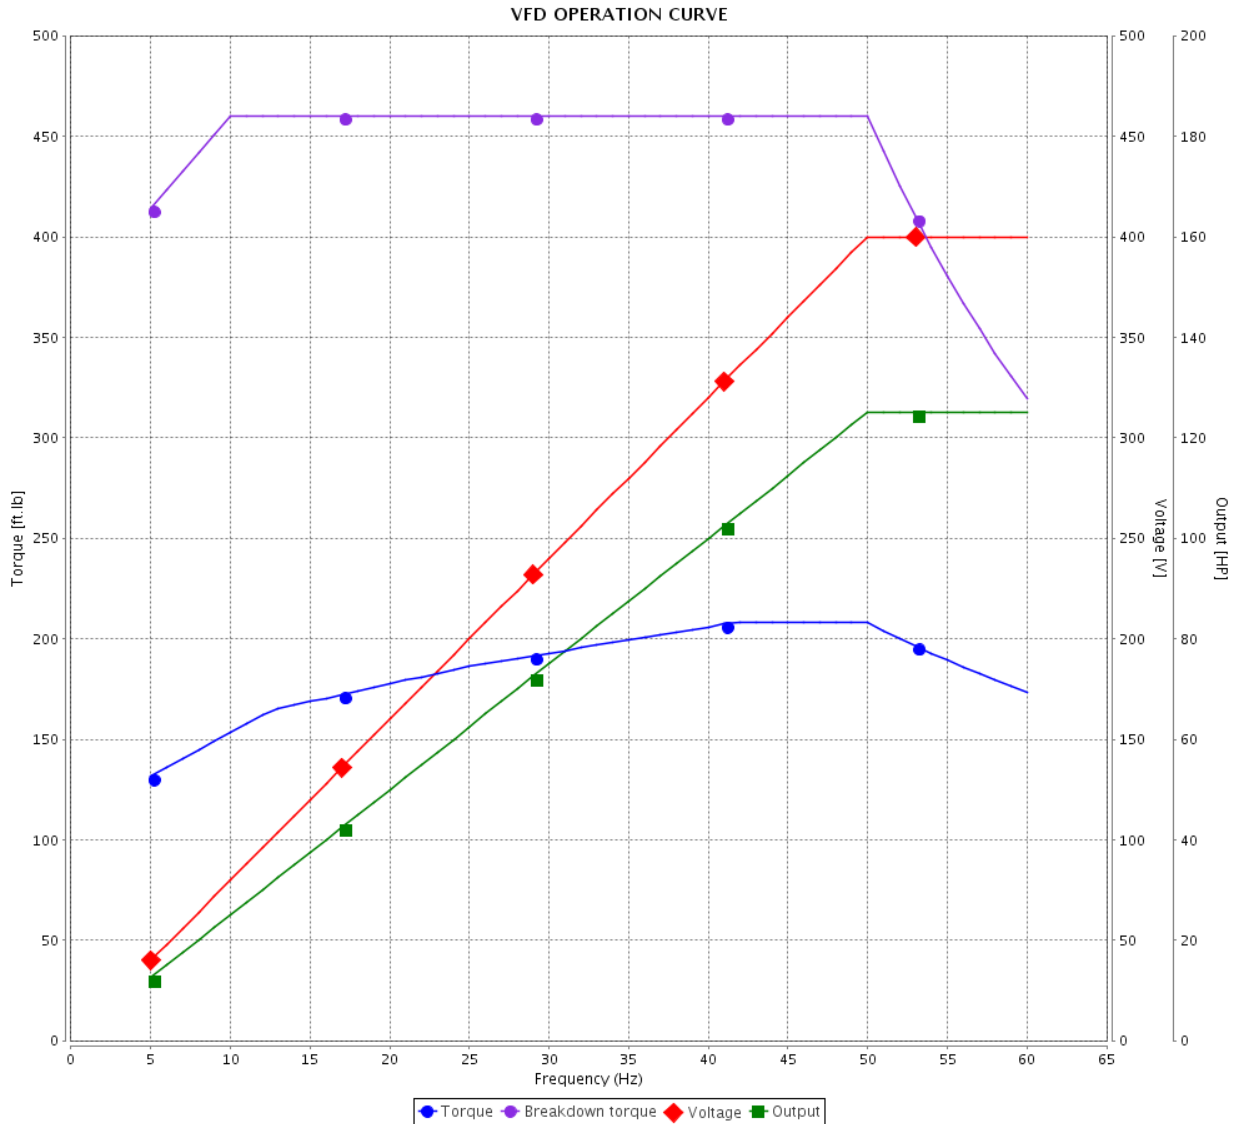

Performance : 400 V 50 Hz 2P

Rated current : 154 A  
LRC : 5.3  
Rated torque : 219 ft.lb  
Locked rotor torque : 180 %  
Breakdown torque : 210 %  
Rated speed : 2955 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		35 / 36		
Date		06/11/2019		

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 10555137

Catalog # : 12536OT3E404TS

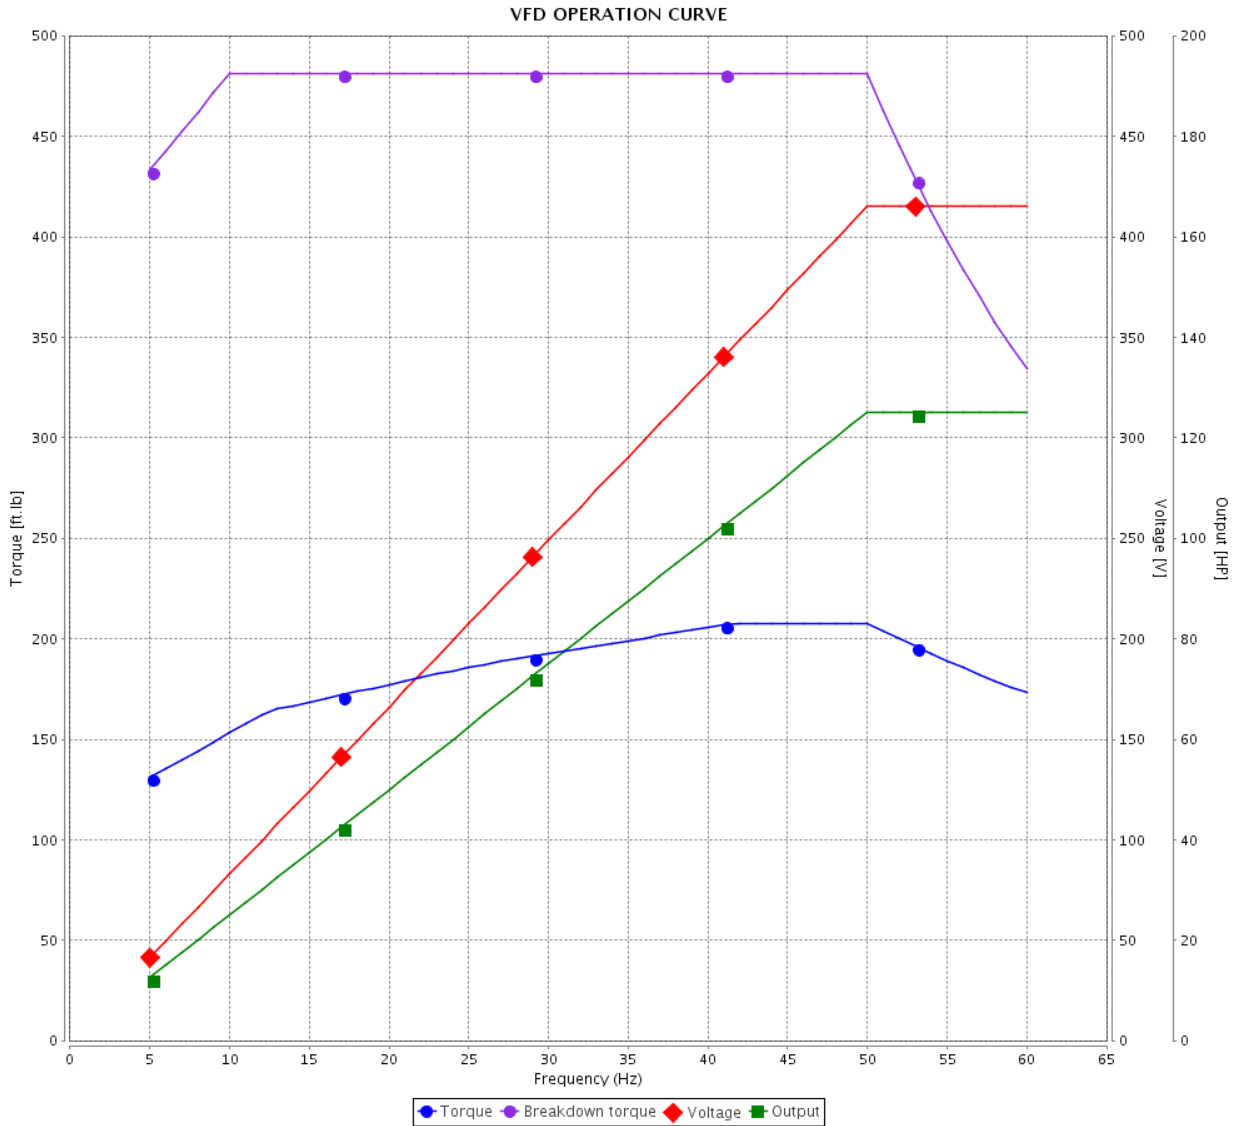

Performance : 415 V 50 Hz 2P




Rated current : 151 A  
LRC : 5.8  
Rated torque : 219 ft.lb  
Locked rotor torque : 190 %  
Breakdown torque : 220 %  
Rated speed : 2960 rpm

Moment of inertia (J) : 10.2 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 36 / 36	Revision
Checked by				
Date	06/11/2019			

Dimensões em polegada  
Dimensions in inches

THIS IS AN UPDATED REVISION, THE  
PREVIOUS ONE MUST BE DISREGARDED.

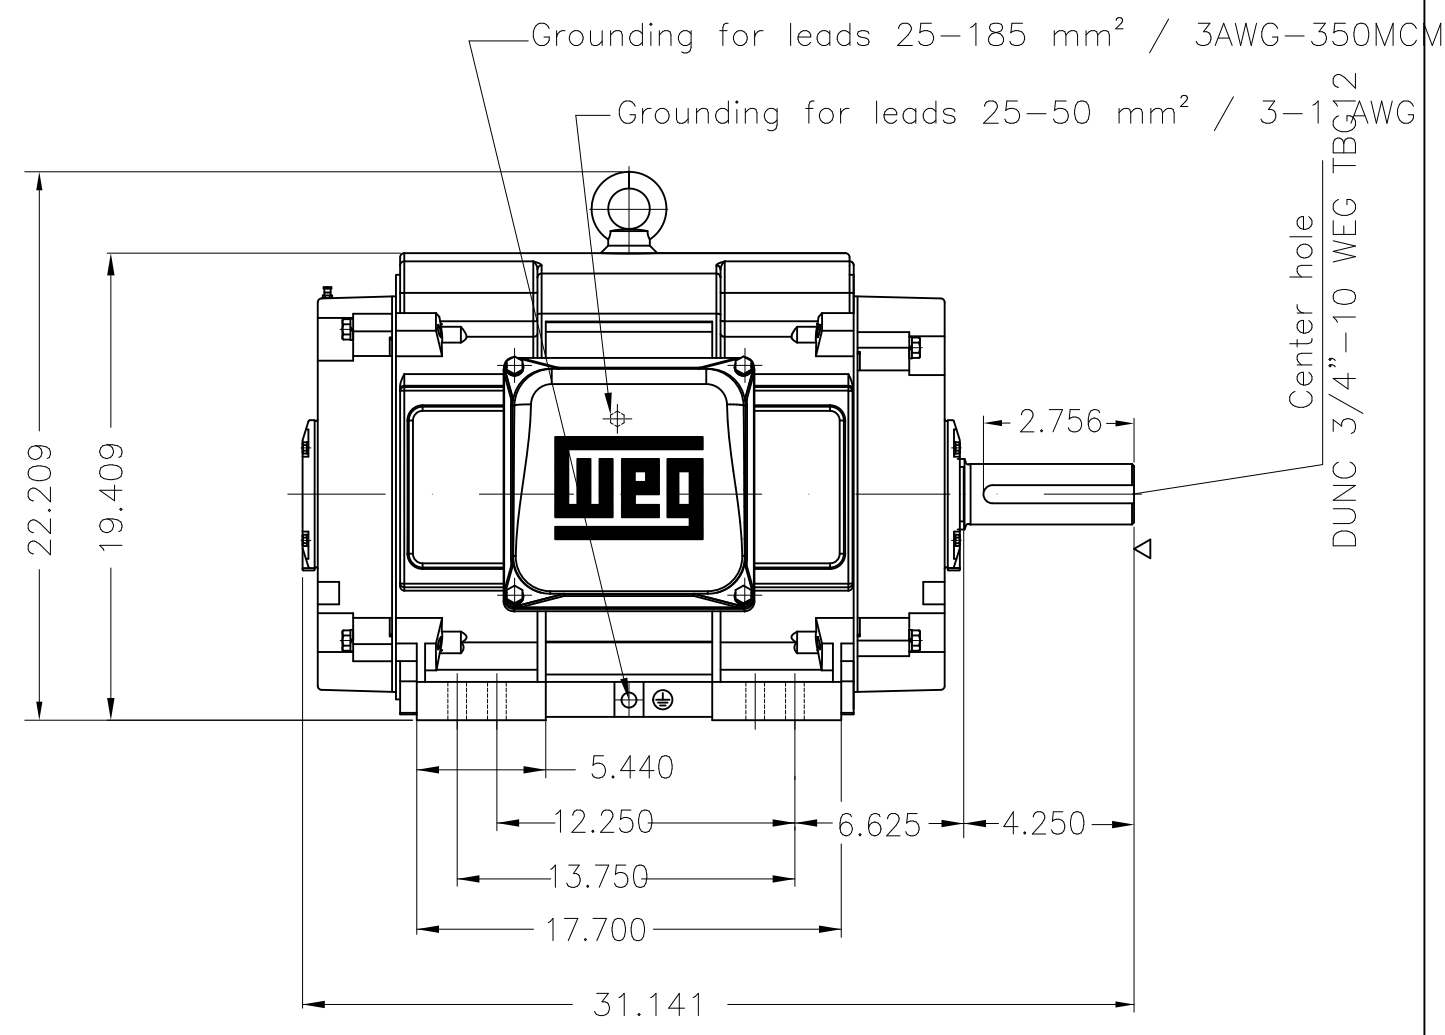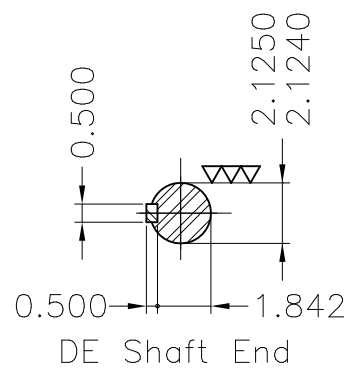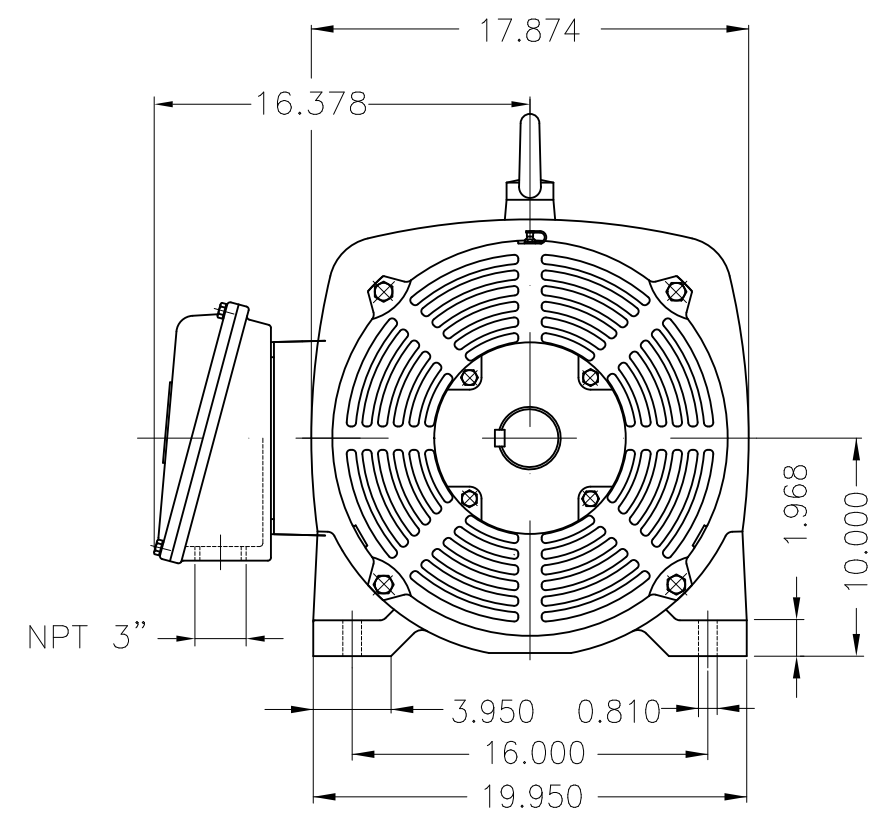

Color RAL 5009  
Painting plan 203A  
Mounting B3R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN	THREE PHASE NEMA P. EFF MOTOR					
CHECKED		FRAME 404/5TS IP23 ODP					
RELEASED		WEG code: 10555137					
REL DT	06.11.2019	WMO Jaragua do Sul	Product Engineering	SHEET	1 / 1		

125 HP 02 Poles 60Hz

A

