


- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
  2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
  3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

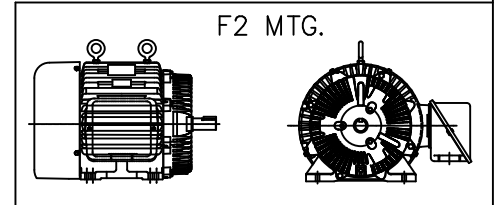

DASH	FRAME	C	H	B	2F	2FF	2FFF	BS
1350	364TS/US	29.38	4	13.25	11.25	11.25	11.25	5.62
1450	365TS/US	30.38	8	14.25	12.25	11.25	11.25	6.12

				TOLERANCES UNLESS SPECIFIED		Lincoln MOTOR		DRAWN KL 03-21-2001			
				DEC.	INCHES		CHK DJK 03-21-2001				
				.X	±.1		APPD JES 03-21-2001				
3	REVISED LIFT LUGS	CN 35028	MSG 09-04-2002	JHL .XX	±.03		TITLE OUTLINE - TEFC				
2	(4) FOOT HOLES ADDED AUTO DUTY	CN 35028	BJK 07-19-2002	DRS .XXX	±.005		360TS & US FR. - TAPPED LEAD HOLE				
1	NEW DRAWING	MU36476	KL 03-21-2001	.XXX	±.0005		MATL				
NO.	REVISION		BY & DATE	CHK	ANG	FINISH		FMF			
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP	±7'30"	CAD FILE SS518197LN		PREV			
							SIZE	DRAWING NO.	PAGE	OF	REV.
							B	SS518197LN	3		3