


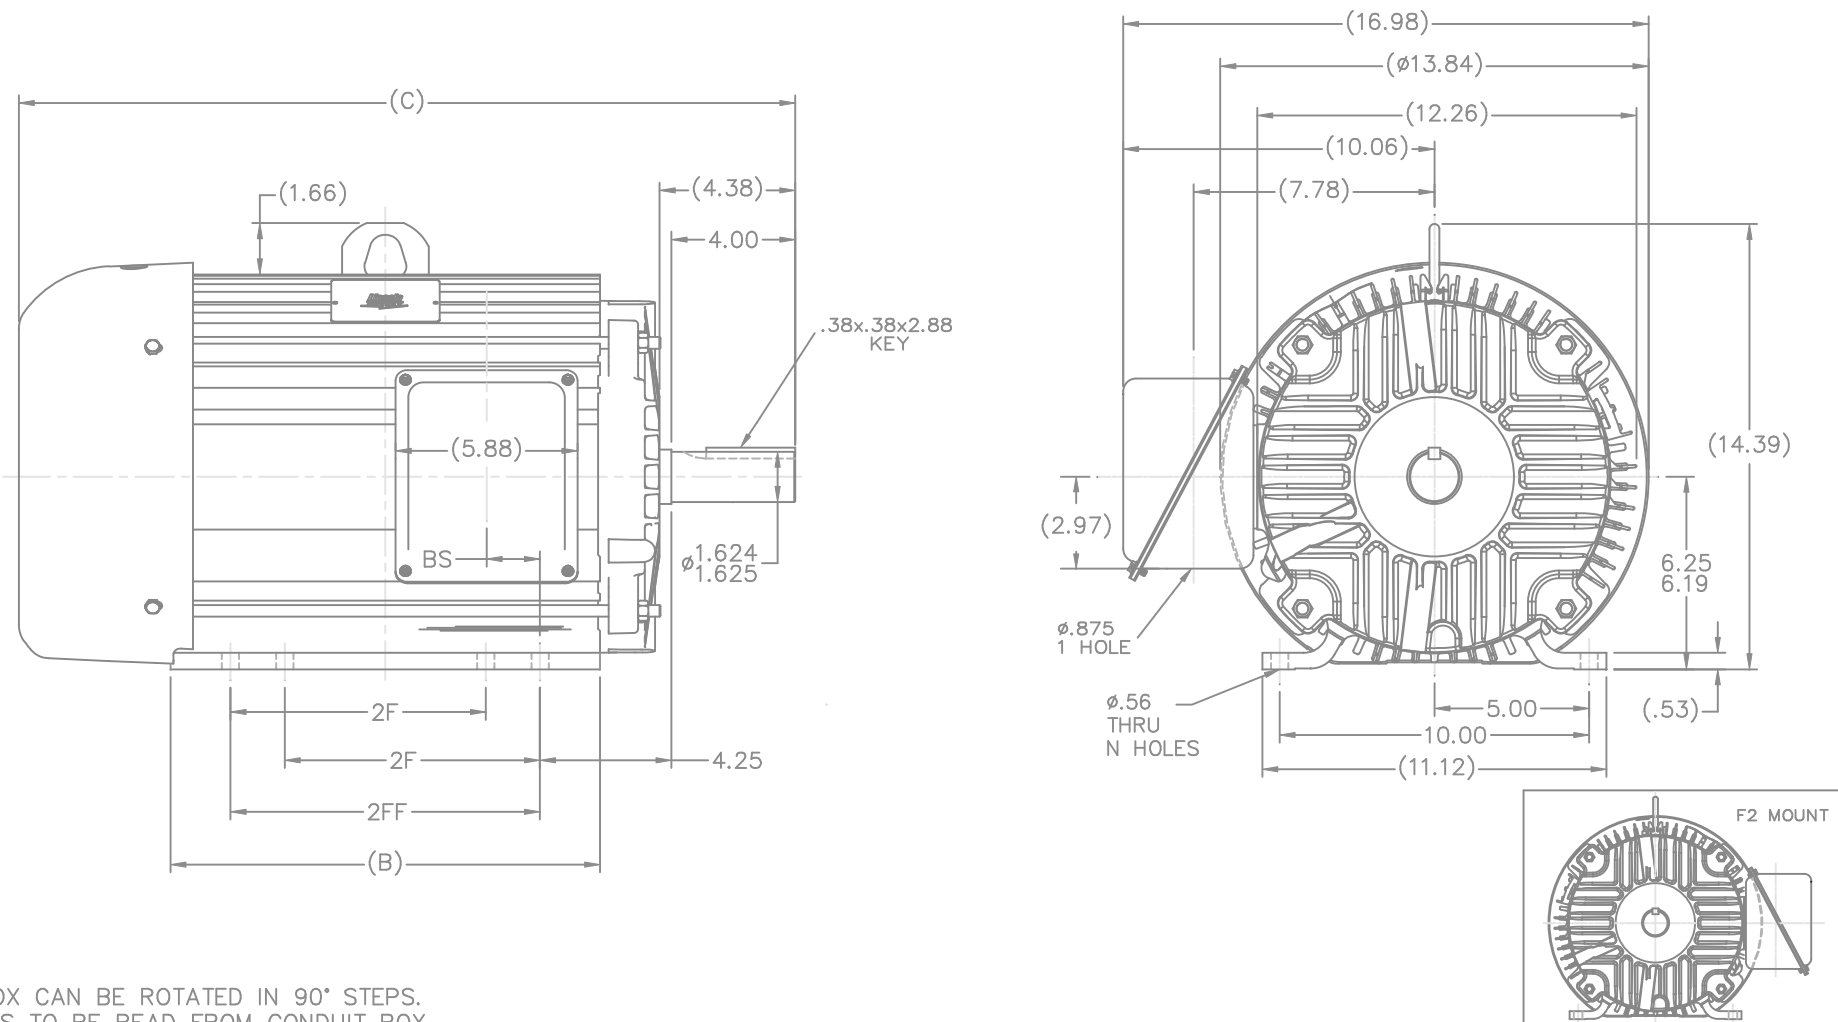

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	B	BS	2F	2FF	N
1200	254T	23.40	12.13	1.73	8.25		4
1375	254/6T	25.15	13.88	1.73	8.25	10.00	8

				TOLERANCES UNLESS SPECIFIED				DRAWN MJK 03-29-2004	
3	B DIM 12.13 WAS 12.00, AND 13.88 WAS 13.75 CN 29200-3584	MJK 05/18/2004		DEC.	INCHES			CHK	ML 03-29-2004
				.X	±.1			APPD	JPL 03-29-2004
2	25.15 WAS 25.65, 23.40 WAS 23.90 CN 32681	MJK 05/04/2004		.XX	±.03	TITLE OUTLINE		SCALE	1=4
1	(4.38) WAS (4.37), Ø1.624/1.625 WAS Ø1.624/1.624 CN 32681	MJK 04/29/2004		.XXX	±.005	250T FR — ALUM. FR. — TEFC		REF	
				.XXXX	±.0005	MAT'L		FMF	
NO.	REVISION	BY & DATE	CHK	ANG	±.730"	FINISH		PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT				RFP		CAD FILE ss321100ln		SIZE	DRAWING NO. PAGE OF REV.
				DIST	LB			B	SS321100LN 3