

BALDOR® • ***RELIANCE***


Product Information Packet

M2557T-4


125HP, 1185RPM, 3PH, 60HZ, 445T, 1856M, OPEN

Part Detail							
Revision:	L	Status:	INA/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	1856M	Elec. Spec:	18WGX018	CD Diagram:	
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	18D01	Layout:	
Frame:	445T	Mounting:	F1	Poles:	06	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	04-01-2010
Leads:	6#6	Literature:		Elec. Diagram:		Replaced By:	


Accessories		
Part Number	Description	Multiplier
18-1202	C FACE KIT	A8
18EP1600A01SP	D-FLANGE KIT (FOR 88 MAX STACK ONLY)	A8

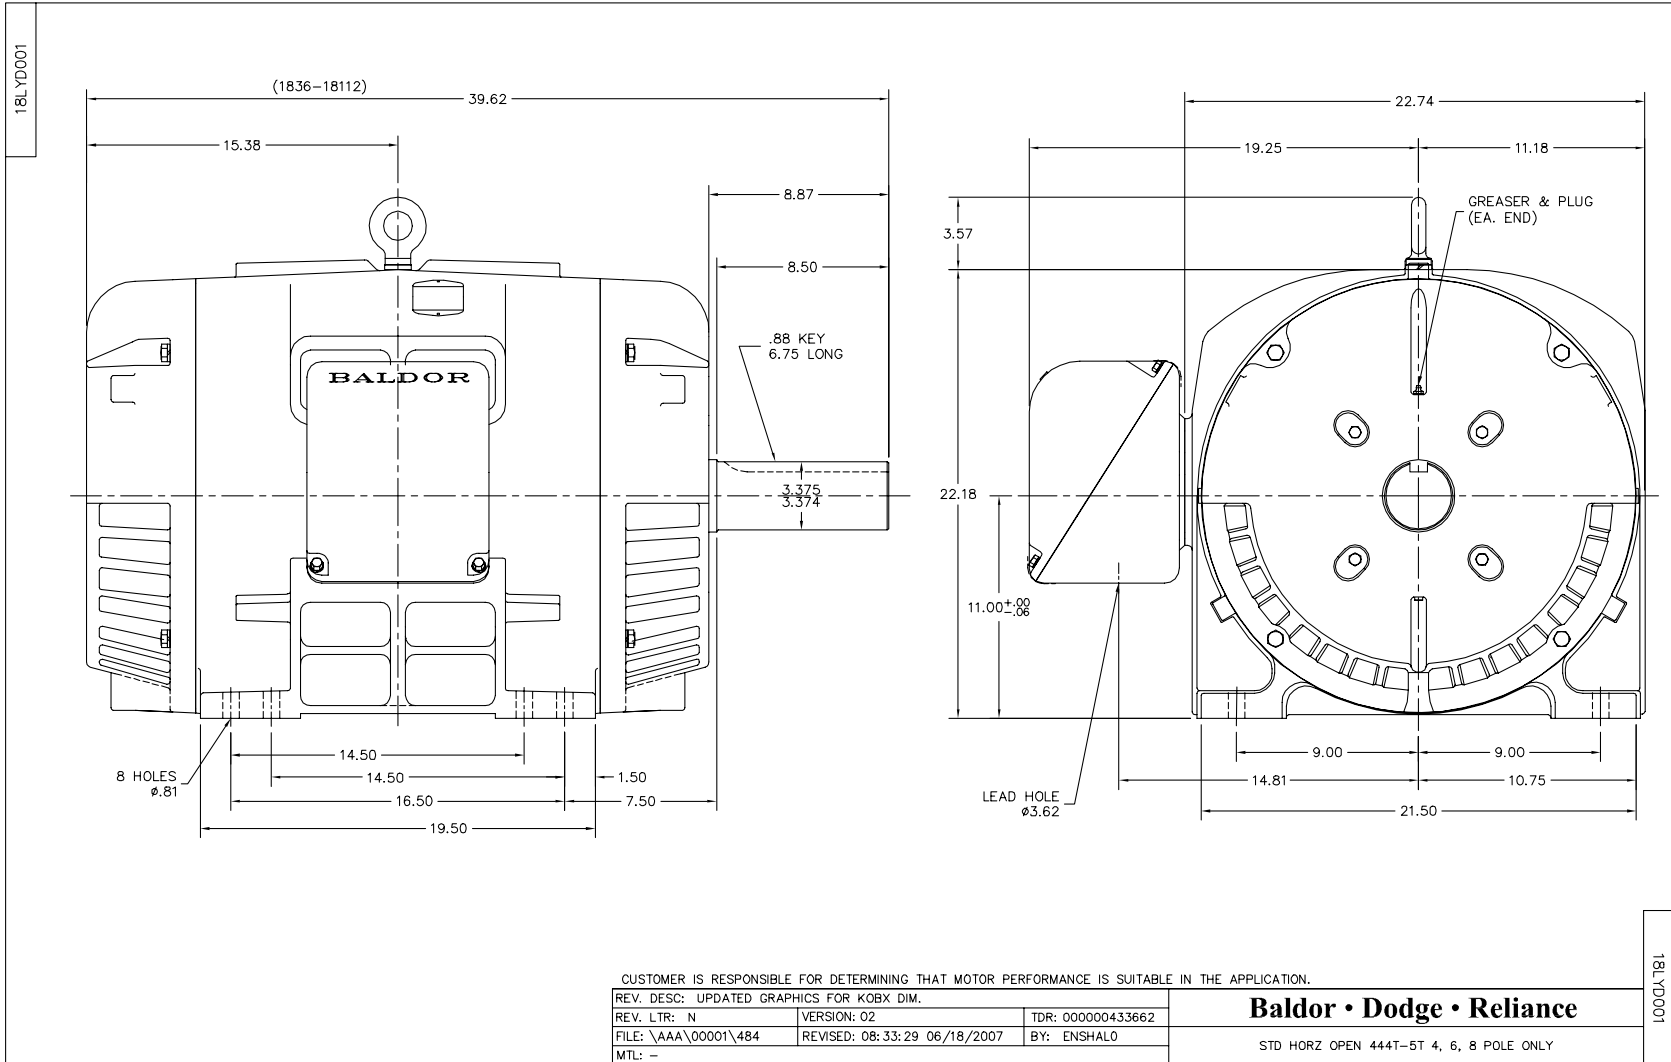


CD0382

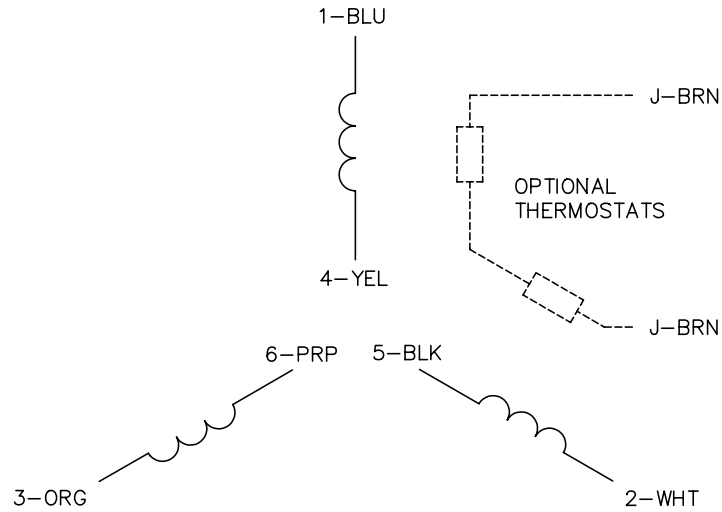

RUN CONNECTION
(1D)



START CONNECTION
(1Y)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. FOR ACROSS-THE-LINE STARTING, USE 'RUN' CONNECTION.

REV. DESC: ADD NOTE 5 FOR DOL STARTING			
REV. LTR: E	BY: JLP	REVISED: 11/30/00 2:26	TDR: 0226155
CD0382		FILE: AAA00005243	REF: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, Y START/D RUN

CD0382